

Wipe-on Finish Myths Debunked

Review: Veritas  
Marking Knife



# POPULAR Woodworking MAGAZINE

February 2013 ■ #202

## Carolina Cellarette

No-fuss Dovetails & Details

## Japanese Chisels

Tough Steel,  
Incredible Edge

## Shell, Stone & Metal Inlay

Simple Techniques,  
Stunning Results

## Fast Fix for Uneven Legs

Table Saw Trick Cures  
Age-Old Problem

## Greene & Greene:

Beautiful & Buildable  
Ultimate Bungalow Bed



fw media

US \$6.99



0 74808 01355 5 02

Display until March 4, 2013

## Arkansas Stones

Stay Sharp – Naturally

popularwoodworking.com





# Grizzly Industrial

**PURVEYORS OF FINE MACHINERY®, SINCE 1983!**

- OVER A MILLION SQUARE FEET PACKED TO THE RAFTERS WITH MACHINERY & TOOLS
- 2 OVERSEAS QUALITY CONTROL OFFICES STAFFED WITH QUALIFIED GRIZZLY ENGINEERS
- HUGE PARTS FACILITY WITH OVER 1 MILLION PARTS IN STOCK AT ALL TIMES
- TRAINED SERVICE TECHNICIANS AT ALL 3 LOCATIONS • MOST ORDERS SHIP THE SAME DAY

## 10" HYBRID TABLE SAW with Riving Knife

- Motor: 2 HP, 110V/220V, single-phase
- Precision-ground cast iron table with wings measures 27" x 40"
- Arbor: 5/8"
- Arbor speed: 3850 RPM
- Capacity: 3 1/2" @ 90°, 2 3/16" @ 45°
- Rip capacity: 30" R, 12" L
- Quick change riving knife
- Cast iron trunnions
- Approx. shipping weight: 404 lbs.

INCLUDES BOTH REGULAR & DADO BLADE INSERTS  
**BEAUTIFUL WHITE COLOR!**



**G0715P ONLY \$795<sup>00</sup>**

**\$99**  
shipping  
weight 40 lbs.

## 17" HEAVY-DUTY BANDSAWS

- Motor: 2 HP, 110V/220V, single-phase, TEFC
- Precision-ground cast iron table size: 17" sq.
- Table tilt: 45° R, 10° L
- Cutting capacity/throat: 16 1/4"
- Max. cutting height: 12 1/2"
- Blade size: 131 1/2" L (1 1/2"-1" W)
- Blade speeds: 1700 & 3500 FPM
- Quick release blade tension lever
- Approx. shipping weight: 342 lbs. (G0513), 346 lbs. (G0513P)

MADE IN TAIWAN  
**BEAUTIFUL WHITE COLOR!**



INCLUDES DELUXE EXTRUDED ALUMINUM FENCE, MITER GAUGE & 1/2" BLADE

**G0513P ONLY \$895<sup>00</sup>**

ALSO AVAILABLE IN GRIZZLY GREEN

**G0513 HEAVY-DUTY 17" BANDSAW ONLY \$895<sup>00</sup>**

**\$99**  
shipping  
weight 40 lbs.

## CONTRACTOR STYLE SAW

w/ Riving Knife

- Motor: 1 1/2 HP, 110V/220V, 11.5A/5.7A, single-phase, pre-wired 110V
- Encapsulated blade for improved dust collection
- Front/rear locking fence
- Fence scales on left and right side of blade
- Independent-side blade guard
- Miter gauge
- Extruded aluminum fence
- Cogged V-belt

FREE 10" CARBIDE-TIPPED BLADE

MADE IN TAIWAN



**G0732 ONLY \$795<sup>00</sup>**

**\$99**  
shipping  
weight 40 lbs.

## 10" LEFT-TILTING TABLE SAWS

with Riving Knife & Cast Iron Router Table

- Motor: 3 HP or 5 HP, 240V, single-phase
- Precision-ground cast iron table size with wings: 27" x 48" • Arbor: 5/8" • Cutting capacity: 25 5/8" R, 8" L • Max. depth of cut: 3" @ 90°, 2 1/2" @ 45° • Approx. shipping weight: 550 lbs. (G1023RLW), 542 lbs. (G1023RLWX)

SP®  
C 177335

MADE IN TAIWAN

FREE 10" CARBIDE-TIPPED BLADE

**G1023RLW 3 HP ONLY \$1350<sup>00</sup>**  
**G1023RLWX 5 HP ONLY \$1395<sup>00</sup>**



**\$150**  
shipping  
weight 40 lbs.

## 10" 3HP CABINET TABLE SAWS

w/Riving Knives

- Motor: 3 HP, 220V, single-phase Leeson®
- Table size w/extension: (G0690) 27" x 40" (G0691) 27" x 74 3/4" • Table height from floor: 34" • Arbor speed: 4,300 RPM • Max. dado width: 1 3/16" • Max. depth of cut @ 90°: 3 1/8", @ 45°: 2 1/16" • Overall dimensions: (G0690) 62"L x 41"W x 40"H (G0691) 82"L x 41"W x 40"H
- Approx. shipping weight: 542 lbs. (G0690), 572 lbs. (G0691)

INCLUDES 10" x 40T BLADE AND H3308 PUSHSTICK

**3 HP, Single-Phase G0690 ONLY \$1325<sup>00</sup>**  
**3 HP, Single-Phase G0691 ONLY \$1425<sup>00</sup>**



**\$150**  
shipping  
weight 40 lbs.

## 14" HEAVY-DUTY BANDSAW

- Motor: 1 HP, 110V/220V, single-phase, TEFC, 1725 RPM
- Amps: 11A/5.5A
- Table size: 14" x 14" x 1 1/2"
- Table tilt: 45° R 10° L
- Floor to table height: 43"
- Cutting capacity/throat: 13 1/2"
- Maximum cutting height: 6"
- Blade size: 93 1/2" (1 1/2" to 3/4" wide)
- Approximate shipping weight: 246 lbs.

**New!**

EXTREME SERIES

MADE IN TAIWAN

MADE IN ISO 9001 FACTORY!



**G0555LX ONLY \$545<sup>00</sup>**

**\$79**  
shipping  
weight 40 lbs.

## 14" 1 HP BANDSAW

- Motor: 1 HP, TEFC, 110V / 220V single-phase, 1725 RPM
- 4" dust port
- Cutting cap./throat: 13 1/2"
- Max. cutting height: 6"
- Overall size: 66 1/2"H x 26 1/2"W x 30 3/4"D
- Precision-ground cast iron table: 14"x 14"
- Table height: 43 1/8", Tilt: 45° R, 15° L
- Blade speeds: 1500 & 3200 FPM
- Blade size: 92 1/2" - 93 1/2" (1 1/2" to 3/4" wide)
- Approx. shipping weight: 196 lbs.

SP®  
C 252923  
LIMITED SUPPLIES

MADE IN TAIWAN



**G0555P ONLY \$525<sup>00</sup>**

**\$79**  
shipping  
weight 40 lbs.

## 19" EXTREME SERIES BANDSAWS

EXTREME SERIES

- Motor: 3 HP, 220V, single-phase, TEFC
- Precision-ground cast iron table size: 26 3/4" x 19"
- Table tilt: 45° R, 5° L
- Cutting capacity/throat: 18 1/4"
- Max. cutting height: 12"
- Blade size: 143" L (1 1/2"-1 1/4" W)
- Blade speeds: 1700 & 3500 FPM
- Approx. shipping weight: 460 lbs. (G0514X), 496 lbs. (G0514XF)



**G0514X ONLY \$1495<sup>00</sup>**

ALSO AVAILABLE

**G0514XF W/FOOT BRAKE ONLY \$1395<sup>00</sup>**

SP®  
C 252923  
(G0514X ONLY)

**\$99**  
shipping  
weight 40 lbs.

\*To maintain machine warranty, 440V operation requires additional conversion time and a \$250 fee. Please contact technical service for complete information before ordering.

**PRICING CODE**  
13POP  
MENTION THIS CODE  
WHEN PLACING YOUR ORDER

FOLLOW US ON



**1-800-523-4777**

3 GREAT SHOWROOMS!

BELLINGHAM, WA • MUNCY, PA • SPRINGFIELD, MO

**TECHNICAL SERVICE:**  
570-546-9663  
FAX: 800-438-5901



# 30th Anniversary 1983 - 2013



**FREE CATALOG**  
764 PAGES  
HUGE SELECTION OF HIGH  
QUALITY MACHINES & TOOLS AT  
INCREDIBLE PRICES

## 12" JOINTER/PLANER COMBINATION MACHINES

- Motor: 5 HP, 220V, single-phase
- Jointer table size: 14" x 59 1/2"
- Cutterhead dia.: 3 1/8"
- Cutterhead speed: 5034 RPM
- Max. jointer depth of cut: 1/8"
- Max. width of cut: 12"
- Planer feed rate: 22 FPM
- Max. planer depth of cut: 1/8"
- Max. planer cutting height: 8"
- Planer table size: 12 1/4" x 23 1/8"
- Approx. shipping weight: 734 lbs. (G0633), 704 lbs. (G0634XP), 750 lbs. (G0634Z)

**CARBIDE  
INSERT SPIRAL  
CUTTERHEAD!**



**BEAUTIFUL  
WHITE  
COLOR!**



**NEW END-  
MOUNTED FENCE**

**MADE IN TAIWAN**

**FREE SAFETY  
PUSH  
BLOCKS**

**\$150**  
shipping  
lower 48 states

**G0634XP ONLY \$2295<sup>00</sup>**

ALSO AVAILABLE IN GRIZZLY GREEN

**G0633 JOINTER/PLANER ONLY \$1995<sup>00</sup>**

**G0634Z SPIRAL CUTTERHEAD MODEL ONLY \$2595<sup>00</sup>**

## CYCLONE DUST COLLECTOR

- Motor: 1 1/2 HP, 110/220V, single-phase, TEFC, 3450 RPM, prewired 110V
- Airflow capacity: 775 CFM at 1.08" SP
- Max. static pressure: 10"
- Intake port: 6" with included 5" optional port
- Filtration: 99.9% at 0.2-2 microns
- Overall dimensions: 38 1/4" W x 65 1/2" H x 23 1/4" D
- 220V operation requires P0703P088 220V conversion kit. Wiring procedures must be completed by an electrician or other qualified personnel. See manual for details.
- Approx. shipping weight: 216 lbs.

**BEAUTIFUL  
WHITE COLOR**

ONLY  
65 1/2"  
TALL!



**G0703P  
ONLY \$795<sup>00</sup>**

**MADE IN TAIWAN**

**\$79**  
shipping  
lower 48 states

## 8" JOINTERS

- Motor: 3 HP, 220V, single-phase, TEFC
- Precision-ground cast iron table size: 9" x 72 1/2"
- Max. depth of cut: 1/8"
- Max. rabbeting depth: 1/2"
- Cutterhead dia.: 3"
- Cutterhead speed: 5000 RPM
- Cuts per minute: 20,000
- Approx. shipping weight: 498 lbs. (G0656P), 500 lbs. (G0656PX)

**CHOOSE EITHER 4 HSS  
KNIVES OR SPIRAL  
CUTTERHEAD MODEL**



**FREE SAFETY PUSH  
BLOCKS**

**BUILT-IN  
MOBILE BASE**

**\$150**  
shipping  
lower 48 states

**G0656P ONLY \$825<sup>00</sup>**

SPIRAL CUTTERHEAD

**G0656PX ONLY \$1225<sup>00</sup>**

## 12" x 60" SHORT BED JOINTER with Spiral Cutterhead

- Motor: 3 HP, 220V, single-phase, TEFC
- Precision-ground cast iron table size: 13" x 60"
- Fence: 5 1/8" x 31 1/4"
- Cutterhead dia.: 3 3/4"
- Cutterhead speed: 4950 RPM
- Bevel jointing: 45°, 90°, 135°
- Max. depth of cut: 1/8"
- Max. rabbeting depth: 3/8"
- Approx. shipping weight: 838 lbs.

**MADE IN ISO 9001  
FACTORY!**

**PARALLELOGRAM  
TABLE ADJUSTMENT**



**FREE SAFETY  
PUSH BLOCKS**

**G0706 ONLY \$2495<sup>00</sup>**

**\$179**  
shipping  
lower 48 states

## 15" PLANERS

- Motor: 3 HP, 220V, single-phase
- Precision-ground cast iron table size: 15" x 20"
- Min. stock thickness: 3/8"
- Min. stock length: 8"
- Max. cutting depth 6" wide board: 1/8"
- Max. cutting depth full width: 3/32"
- Feed rate: 16 & 30 FPM
- Cutterhead speed: 5000 RPM
- Approx. shipping weight: 662 lbs. (G0453P), 666 lbs. (G0453PX)

**CHOOSE EITHER 3 KNIFE OR  
SPIRAL CUTTERHEAD MODEL**

**G0453P ONLY \$1095<sup>00</sup>**

WITH SPIRAL CUTTERHEAD

**G0453PX ONLY \$1695<sup>00</sup>**



**BUILT-IN  
MOBILE BASE**

**\$150**  
shipping  
lower 48 states

## 18" OPEN END DRUM SANDER

- Sanding motor: 1 1/2 HP, 110V, single-phase
- Conveyor feed rate: variable, 2-12 FPM
- Max. stock size: 36" W x 4 1/2" thick
- Min. board length: 6"
- Sanding drum size: 4"
- Drum speed: 4000 FPM
- Dust port: 2 1/2"
- Cast iron platen
- Sandpaper: 3" W
- Approx. shipping weight: 328 lbs.

**TABLE MOVES  
UP & DOWN**



**SANDS BOARDS  
UP TO 36" WIDE!  
INDEPENDENT DUST  
COLLECTION WITH DUST BAG**

**G0458  
ONLY \$895<sup>00</sup>**

**\$99**  
shipping  
lower 48 states

## 15" DISC SANDER with Stand

- Motor: 1 1/2 HP, 220V, single-phase, 1720 RPM
- Cast iron sanding disc size: 15"
- Cast iron table size: 12" x 20"
- Table tilt: +15° to -45°
- Floor to table height: 37 3/8"
- Dust port: 2 1/2"
- Approx. shipping weight: 216 lbs.

**MADE IN TAIWAN**

**INCLUDES  
MITER GAUGE**



**FEATURES BUILT-IN MOTOR BRAKE  
& STORAGE CABINET WITH SHELF**

**G0719 ONLY \$875<sup>00</sup>**

**\$79**  
shipping  
lower 48 states

## 1 HP WALL MOUNT DUST COLLECTOR

- Motor: 1 HP, 120V/240V, prewired 120V
- Amps: 7A/3.5A (main motor)
- Intake size: 4"
- Bag size (dia. x depth): 13 1/2" x 24"
- Balanced steel, radial fin impeller
- Air suction capacity: 537 CFM
- Max. static pressure: 7.2"
- Approx. shipping weight: 51 lbs.

**MADE IN TAIWAN**

**EASY MOUNTING WALL  
BRACKET & LOCKING THUMB  
SCREW SECURES DUST  
COLLECTOR IN PLACE!**

**G0710 ONLY \$175<sup>00</sup>**

**SPECIAL WALL  
MOUNT DESIGN!**



**grizzly.com**

**OVER 15,000 PRODUCTS ONLINE!**



**PayPal**

**BillMeLater**



Premier

FUSION

# HOW CAN THE BEST GENERAL PURPOSE SAW BLADE GET EVEN BETTER?

## Make It Available In Thin & Full Kerf Designs For Every Table & Chop Miter Saw!

Introducing the Premier Fusion saw blade in both Thin and Full Kerf design.


Now woodworkers have a superior general purpose blade for both the table and chop miter saw in the shop and for the lower horsepower saw on the job site. The New Thin Kerf combines the advanced Premier Fusion features with a thinner kerf design to provide a flawless finish while reducing material waste, which makes it the ideal choice for lowered powered saws.

Freud's patent-pending Premier Fusion Saw Blade is the most technologically advanced blade on the market with a radical new "Fusion" tooth design that combines a double side grind with a 30 degree Hi-ATB to produce a glass-smooth, chip-free top and bottom surface while ripping and crosscutting.

The unique Fusion tooth design, combined with Freud-made TiCo™ Hi-Density Carbide, superior anti-vibration design and patented Perma-SHIELD® non-stick coating create the ultimate general purpose saw blade with flawless cutting performance.

Choose from four blades in the Full Kerf Premier Fusion series – 8", 10", 12" and 14" or try the new Thin Kerf 10" Premier Fusion. Use a Premier Fusion blade once and you'll be convinced.

### Freud's Fusion Tooth Design vs. Others

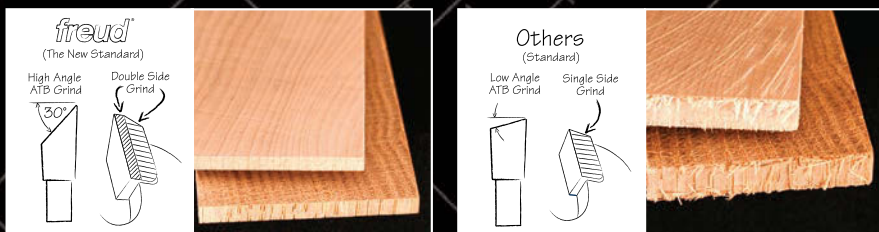

Check out Freud's facebook page and download our FREE monthly woodworking plan!



[www.facebook.com/Freudtools](http://www.facebook.com/Freudtools)

Red saw blades and router bits are a registered trademark of Freud America, Inc. ©2012  
CARD #67 or go to [PWFFREEINFO.COM](http://PWFFREEINFO.COM)



**freud**  
**Precisely the best.**


[www.freudtools.com](http://www.freudtools.com)

1-800-472-7307



# CONTENTS

FEBRUARY 2013

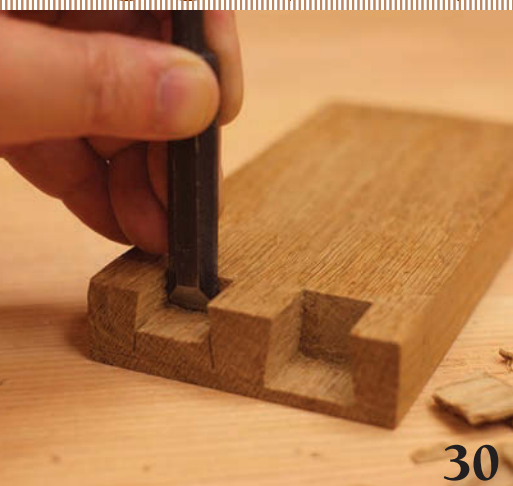

30



40



48

## FEATURES

### 22 Southern Cellarette

Simple construction and inlay combine with sophisticated proportions to create a handsome hiding place for liquor bottles.

BY GLEN D. HUEY

#### ONLINE ► Sliding Dovetails

Watch the author's free video on a simple jig and router setup for making sliding dovetails. [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

### 30 Japanese Chisels

These ancient tools are not just for use in softwoods, despite their reputation.

BY WILBUR PAN

#### ONLINE ► Western vs. Japanese Planes

Read Wilbur Pan and Bob Rozaieski's comparison of two handplane traditions. [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

### 33 Shell, Stone & Metal Inlay

Discover how to use a wide variety of materials to create stunning effects with inlay.

BY MARCO CECALA

#### ONLINE ► See Shell Inlay

Watch as the author installs shell inlay. [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

### 40 A Bed for the Thorsen House

This Greene & Greene-inspired bed is perfect for an "Ultimate Bungalow" – or your own bungalow.

BY DARRELL PEART

#### ONLINE ► Panel Pattern

Download full-size PDF plans for the design cut into the bed's center panel. [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)



### 48 Dan's Whetstones

This Arkansas company, which grew out of a hobby, produces quality American oilstones.

BY LARRY WILLIAMS & DON MCCONNELL

#### ONLINE ► Old Street Tool

Read about the authors' company, Old Street Tool, makers of traditional wooden planes. [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

### 52 Fast Fix for Teetering Legs

Use your table saw like a plane to quickly level the legs on a wobbly four-legged piece.

BY GARY ROGOWSKI

#### ONLINE ► Shaving Legs


Watch as we demonstrate this method in the *Popular Woodworking* shop. [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

33



# CONTENTS

FEBRUARY 2013

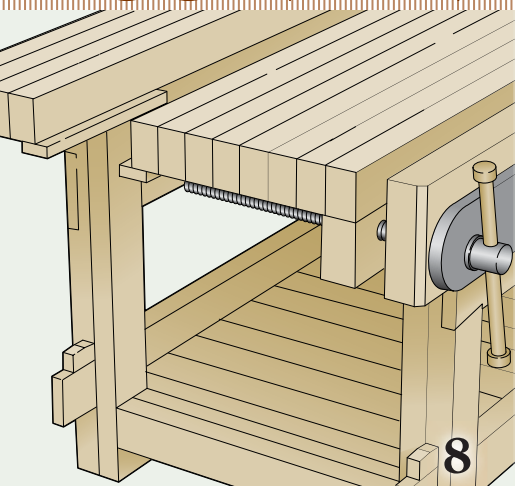

8



14



58

## REGULARS

**6** Paring Down  
**OUT ON A LIMB**  
BY MATTHEW TEAGUE

**8** Split-top  
Workbench:  
Still a Winner?  
**LETTERS**  
FROM OUR READERS

**12** Router Plane  
Auxiliary Base  
**TRICKS OF THE TRADE**  
FROM OUR READERS

### VIDEO ► More Tricks

Read and watch some of our favorite tricks.  
[popularwoodworking.com/tricks](http://popularwoodworking.com/tricks)

**14** Blue Spruce  
Firmer Chisels  
**TOOL TEST**  
BY THE EDITORS

**ONLINE ►** Tool Test Archives  
We have many tool reviews available for free  
on our web site.  
[popularwoodworking.com/tools](http://popularwoodworking.com/tools)

**18** A Practiced Eye  
**DESIGN MATTERS**  
BY GEORGE R. WALKER

**58** Tool Chest Case  
Construction  
**ARTS & MYSTERIES**  
BY ADAM CHERUBINI

**60** Wipe-on  
Finishes  
**FLEXNER ON FINISHING**  
BY BOB FLEXNER

**64** 'Frankenbench'  
**END GRAIN**  
BY W. PAUL OLSEN



60

## POPULAR Woodworking MAGAZINE

Number 202, February 2013. *Popular Woodworking Magazine* (ISSN 0884-8823, USPS 752-250) is published 7 times a year, February, April, June, August, October, November and December, which may include an occasional special, combined or expanded issue that may count as two issues, by F+W Media, Inc. Editorial and advertising offices are located at 8469 Blue Ash Road, Suite #100, Cincinnati, OH 45236. Unsolicited manuscripts, photographs and artwork should include ample postage on a self-addressed, stamped envelope (SASE); otherwise they will not be returned. Subscription rates: A year's subscription (7 issues) is \$24.95; outside of the U.S. add \$7/year • Canada Publications Mail Agreement No. 40025316. Canadian return address: 2835 Kew Drive, Windsor, ON N8T 3B7 • Copyright 2013 by *Popular Woodworking Magazine*. Periodicals postage paid at Cincinnati, Ohio, and additional mailing offices. Postmaster: Send all address changes to *Popular Woodworking Magazine*, P.O. Box 420235, Palm Coast, FL 32142-0235 Canada GST Reg. #R122594716 • Produced and printed in the U.S.A.



YOU SHOULD BE LIMITED ONLY BY YOUR  
IMAGINATION. NOT YOUR TOOLS.



To be the best woodworker you can, you need the right tools. Like our 24" Horizontal Double Drum Sander with 3HP motor and dual v-belt driven sanding drums. Our steel frame and heavy-duty base provide maximum stability. The parallelism between the drums and table is easily adjusted by two convenient screws. And unlike competitors, we found that a high quality conveyor belt provides for longer service life. Imagine that. To learn more about our entire line of woodworking tools, visit your nearest dealer or go to [www.general.ca](http://www.general.ca).

CARD #17 or go to [PWFREEINFO.COM](http://PWFREEINFO.COM)

General® International USA Inc., 760 Jessica St., Murfreesboro, TN 37130





FEBRUARY 2013, VOL. 33, NO. 1

[popularwoodworking.com](http://popularwoodworking.com)

EDITORIAL OFFICES 513-531-2690

PUBLISHER & GROUP EDITORIAL  
DIRECTOR ■ Kevin Ireland

[kevin.ireland@fwmedia.com](mailto:kevin.ireland@fwmedia.com), x11407

EDITOR ■ Matthew Teague  
[matthew.teague@fwmedia.com](mailto:matthew.teague@fwmedia.com), x11007

SENIOR ART DIRECTOR ■ Daniel T. Pessell  
[daniel.pessell@fwmedia.com](mailto:daniel.pessell@fwmedia.com), x11396

EXECUTIVE EDITOR ■ Robert W. Lang  
[robert.lang@fwmedia.com](mailto:robert.lang@fwmedia.com), x11327

EXECUTIVE EDITOR ■ Megan Fitzpatrick  
[megan.fitzpatrick@fwmedia.com](mailto:megan.fitzpatrick@fwmedia.com), x11348

SENIOR EDITOR ■ Steve Shanesy  
[steve.shanesy@fwmedia.com](mailto:steve.shanesy@fwmedia.com), x11238

ONLINE COMMUNITY MANAGER ■ Tom Nunlist  
[tom.nunlist@fwmedia.com](mailto:tom.nunlist@fwmedia.com), x11008

CONTRIBUTING EDITORS ■ Adam Cherubini,  
Bob Flexner, Glen D. Huey,  
Christopher Schwarz

PHOTOGRAPHER ■ Al Parrish

F+W MEDIA, INC.

CHAIRMAN & CEO ■ David Nussbaum

CFO ■ James Ogle

PRESIDENT ■ David Blansfield

CHIEF DIGITAL OFFICER ■ Chad Phelps

VICE PRESIDENT, E-COMMERCE ■ Lucas Hilbert

SENIOR VICE PRESIDENT,  
OPERATIONS ■ Phil Graham

COMMUNICATIONS DIRECTOR ■ Stacie Berger

GROUP MARKETING DIRECTOR ■ Kate Rados

ADVERTISING

VICE PRESIDENT, SALES ■ Dave Davel

ADVERTISING DIRECTOR ■ Don Schroder

331 N. Arch St., Allentown, PA 18104

TEL. 610-821-4425; FAX. 610-821-7884

[d.schroder@verizon.net](mailto:d.schroder@verizon.net)

ADVERTISING SALES

COORDINATOR ■ Connie Kostrzewa

TEL. 715-445-4612 x13883

[connie.kostrzewa@fwmedia.com](mailto:connie.kostrzewa@fwmedia.com)

NEWSSTAND

For newsstand sales, contact Scott T. Hill:  
[scott.hill@procirc.com](mailto:scott.hill@procirc.com)

SUBSCRIPTION SERVICES:

Subscription inquiries, orders and address changes can be made at [popularwoodworking.com](http://popularwoodworking.com) (click on "Customer Service"). Or by mail: *Popular Woodworking Magazine*, P.O. Box 420235, Palm Coast, FL 32142-0235. Or call 386-246-3369. Include your address with all inquiries. Allow 6 to 8 weeks for delivery.

NEWSSTAND DISTRIBUTION:

Curtis Circulation Co., 730 River Road, New Milford, NJ 07646. PHONE: 201-634-7400. FAX: 201-634-7499.

BACK ISSUES are available. Call 800-258-0929 for pricing or visit [popularwoodworking.com](http://popularwoodworking.com). Send check or money order to: *Popular Woodworking Magazine* Back Issues, F+W Media Products, 700 E. State St., Iola, WI 54990. Please specify publication, month and year.

Copyright ©2013 by F+W Media Inc. All rights reserved. *Popular Woodworking Magazine* is a registered trademark of F+W Media.



## Paring Down

I've got router planes and shoulder planes, cabinet scrapers, drawknives and shaves to tackle most any task, but chisels are my particular kink. It's something about their deceptive simplicity. In one sense they're just pieces of steel with handles attached; but they are also endlessly complex tools that must be engineered to gracefully marry the size, shape and weight of the blade – and of course the quality of the steel – with a handle that lends the tool balance and also fits your particular hand in just the right way. I'm a sucker for them, and I can't seem to get enough.

I amassed the bulk of my chisels in the previous century, before the advent of high-end modern models and when you could still pick up a solid Sweetheart-era Stanley 750 for 10 bucks or an Everlasting for twice that. As such, my collection is a ramshackle lot of well over 100 chisels. I've got my go-to favorites, all of which live within easy reach of my workbench, but others are tucked away in drawers and I haven't used them in years. There are a few I never even bothered to tune up, and loose blades and handles seem to pop up whenever I scour the nooks and crannies of my shop in search of a misplaced tool.

But in truth, I got along pretty well with only the workmanlike five-piece set of blue-handled chisels that my college roommate left in the laundry room when he moved out years ago. And a few years later I did just fine with the basic four-piece set of 750s that Lonnie Bird was kind enough to pass down to me. Adding the 1/8" T. H. Witherby for tight spots and the crisp, long-handled 1 1/2" Charles Buck for paring only made work easier and more enjoyable. I guess I could have stopped there. And gotten

rid of the outliers. But with chisels as with beers, buying more always seems like a good idea.

Finally, 10 years ago, when building furniture became the primary means by which I fed my children and my mortgage broker, I realized that owning yet another chisel was a luxury I could do without. There was brief backsliding over a pair of Japanese fishtail chisels that are great for dovetailing (when I remember that I have them), but for the most part I stayed clean.


I even tested out some of the modern chisels that began to surface with the boutique toolmaking boom that came along shortly after the Internet. I fell in love with a few of them. But I refrained; I and my checkbook were wooed by the well-worn handles and patinated blades of vintage tools.

But when it came time to pack up for *Woodworking in America* last October, I found myself sorting through well over a dozen chisels trying to decide on the right combination to take on the road. And as much as I love them all, I'll admit to longing for a clean, full set of modern chisels.

In the coming months I'll take a closer look at some of the modern chisels that have caught my eye. And I'm

sure I'll soon buy a set. But I can't pretend that new chisels will make me a better woodworker. They're a luxury, like a good micro-brew or a high-end guitar. But you know as well as I do: Keith Richards would sound better on a dime-store ukulele than Sonny Bono would sound on a 1959 Gibson Les Paul. It's what you bring to the tool, not what the tool brings to you. **PWM**

*Matthew Teague*

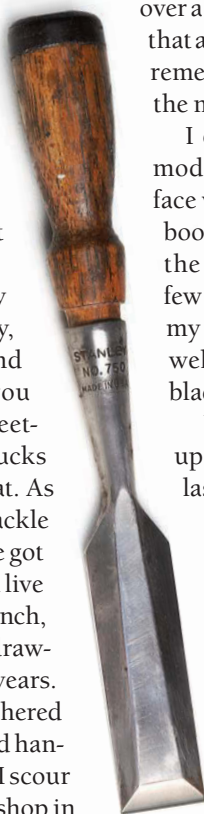



## Dust Collection for Every Shop!

Uncompromising  
quality, innovation  
and performance for  
20 years.

1.5 / 2 / 3 / 5hp  
V - Systems



- GE® HEPA (Certified H-12) Filter Media. See specs on website. Most Systems.
- Filter Flame-Guard Protection Most Systems - Pat. Pend.
- Built to last a lifetime. Proudly made in the USA.
- Complete line of 1.5 - 20hp systems and components.
- Free design consultation

Pat. Pend.

## Dust Deputy®

Deluxe Dust Deputy®  
**\$89.00**

**No More Clogged Filters!**

The Dust Deputy wins cyclone separator shootout! by "The Wood Whisperer.com"



Retrofits to any shop vacuum.

Dust Deputy's review at [www.oneida-air.com](http://www.oneida-air.com)



## Ductwork

**FREE** shipping on ductwork of \$300+ / 48 states / Some restrictions apply

**Oneida**  
Air Systems



Made in the USA.



Dust Collection Systems & Components Since 1993.

Call for **Free** Catalog!

**1.800.732.4065**

**Buy Direct!**

[www.oneida-air.com](http://www.oneida-air.com)

# The facts are hard to ignore.

Titebond® III outperforms polyurethane glues.

Reference Guide

### Glue comparison

What woodworkers need to know!

	Titebond III	Polyurethane Glues
Higher Bond Strength	✓✓✓	✓
Exterior Use - Waterproof	✓✓✓	
Easy Water Cleanup	✓✓✓	
Much Safer To Use	✓✓✓	
Shorter Clamp Time	✓✓✓	
No Foam - Less Mess	✓✓✓	
Shorter Open Time	✓✓✓	
Doesn't Stain Skin	✓✓✓	
Bonds Most Materials	✓✓✓	
Bonds Oily / Exotic Woods	✓✓✓	
Lower Cost - Better Value	✓✓✓	
Longer Usable Shelf Life	✓✓✓	✓✓

Woodworking Handbook

**Titebond III**  
ULTIMATE Wood Glue  
Waterproof - Superior Strength  
Outperforms All Other Wood Glues  
Longer Open Assembly Time  
NET 8 FL. OZ. (237 mL)


As the leader in wood glues, we want you to know the truth about polyurethane glue and woodworking. A straightforward comparison between Titebond® III Ultimate Wood Glue and polyurethane glue tells the story.

Titebond® III is THE ultimate choice for bonding wood to wood. Period.

For more information and a detailed comparison, please visit [www.titebond.com/TBIIIvsPolyurethane](http://www.titebond.com/TBIIIvsPolyurethane)

Made in the USA

# Split-top Workbench: Still a Winner?

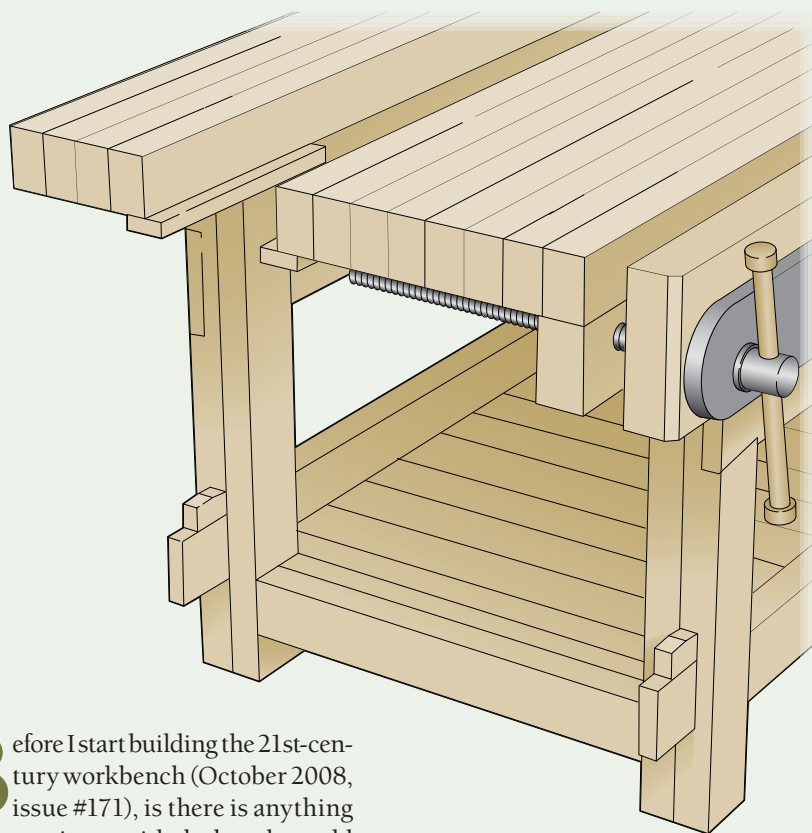

**B**efore I start building the 21st-century workbench (October 2008, issue #171), is there is anything that experience with the bench would make you want to change in the design?

John Neslon  
via e-mail

John,

On the whole I've been very happy with the bench in the four years since I made it. The only change I might consider came to light when I taught a class in building the bench at Kelly Mehler's School of Woodworking a couple of years ago, and that is the size of the two top sections.

I do almost all of the work on the front part of the bench, and the back half is used

as a staging area for tools and parts. Some of the guys in class made the front wider by a few inches and made the back section narrower. This was accomplished by adding two or three laminations to the front and eliminating them from the back. If you have a planer big enough to surface the wider top, you might consider this.

We've added a free SketchUp file to our 3D Warehouse with the alternate arrangement (see [popularwoodworking.com/sketchup](http://popularwoodworking.com/sketchup) for more information).

Robert W. Lang, executive editor

## Andy Rae is Integral to the Boggs Collective's Success

I read the article (about the Boggs Collective, Nov. 2012, issue #200) and really liked how you did it overall. One omission, though, that I think is worth

bringing up, is that Andy Rae was not mentioned.

One of the many things that is different with the Boggs Collective compared to my former shop in Berea, Ky., is that we offer all manner of case goods and

are working slowly on developing an entire line of indoor furniture. Due to demand, the focus on case goods has been filling orders for custom work. That is made possible by Andy, who, as you know, is a great cabinetmaker, and I am proud to have him on our team. We have not found other cabinetmakers who can both work at Andy's pace and achieve his caliber of craftsmanship.

In the article you have a picture of his workspace and his now-famous tool cabinet. Seems an odd oversight not to mention him as an important part of our company.

Otherwise, great work describing who we are and what we do.

Brian Boggs

Asheville, North Carolina

*Editors note: In addition to our oversight in not mentioning Andy Rae, the band saw pictured on page 44 of the article was incorrectly identified; it is a Yates American from the 1930s.*

## Is Treated Lumber OK for Workbench Legs?

I've been hunting for materials for a Roubo bench (as shown in "Workbenches: From Design & Theory to Construction & Use" by Christopher Schwarz), which I plan build over the winter.

I found a stack of 8x8 treated lumber (yellow pine) at the big box store – and that's a wonderful size for bench legs. Unfortunately, they do not carry the equivalent untreated (and I have yet to check moisture content).

Do you see any problems using treated 8x8s for the bench legs?

Ken Benway

Whispering Pines, North Carolina

Ken,  
I would not use pressure-treated lumber for a bench – or for anything that would be going inside my house or shop. That stuff, while heavier than untreated lumber and longer lasting in inclement conditions, is treated with some toxic chemicals – so much so that it's recommended you wear gloves when handling it.

While treated lumber is less toxic than it was a decade ago, it's very wet, and that

CONTINUED ON PAGE 10



# WORKSHOP MAKEOVER GIVEAWAY

This  
**\$6,000 Workshop**  
Could Be Yours!  
ENTER **ONLINE** TODAY!

Enter for your chance to **WIN A COMPLETE SHOP** that features **ALL** you see here.

ENTRY DEADLINE: Midnight, Eastern Standard Time, May 31, 2013



10" PROSHOP TABLE SAW

**JET** JPS-10



16" PLANER

**JET** JWP-16OS



6" JOINTER

**JET** JJ-6CSDX




1-1/2-HP DUST COLLECTOR

**JET** DC-1100VX-CK



14" BAND SAW

**JET** JWBS-14DXPRO

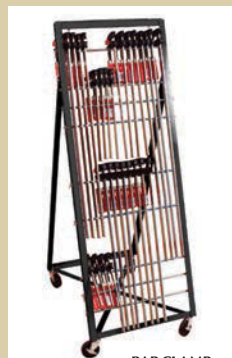

BAR CLAMP  
ASSORTMENT  
WITH MOBILE  
RACK

**BESSEY**  
BTB30A



4-PC "H" STYLE  
PIPE CLAMP SET

**BESSEY**  
BPC-H34



K-BODY® REVO™  
FRAMING KIT

**BESSEY**  
KRK2450



K-BODY® REVO™  
EXTENDER KIT

**BESSEY**  
KRX2450



24-4" LIGHT  
DUTY STEP-OVER  
CLAMPS

**BESSEY**  
LMU2004

Complete prizes and contest rules are also available at [www.popwood.com/winshop](http://www.popwood.com/winshop)

**[www.popwood.com/winshop](http://www.popwood.com/winshop)**

Popular Woodworking Magazine's "WORKSHOP MAKEOVER GIVEAWAY" SWEEPSTAKES: These are only abbreviated rules. The "Workshop Makeover Giveaway" Sweepstakes is subject to Official Rules available during promotion period (Jan. 1, 2013-May 31, 2013) at [www.popwood.com/winshop](http://www.popwood.com/winshop). See Official Rules for complete entry details and prize descriptions. NO PURCHASE OR SUBSCRIPTION NECESSARY TO ENTER OR WIN. Must be a legal resident of the U.S. or Canada (excluding Quebec) who has reached the age of majority in the participant's jurisdiction of residence to enter. One Grand Prize—Woodworker's Home Workshop valued at US \$6,000. Odds of winning depend on number of entries. Void in Quebec and where prohibited. Sponsor: F+W Media, Inc., 10151 Carver Rd., Suite 200, Blue Ash, OH 45242 USA.

**ENTER  
NOW!**

The **WORKSHOP MAKEOVER  
GIVEAWAY** is sponsored by:

**JET**

**BESSEY**

POPULAR  
**Woodworking**  
MAGAZINE

(along with the chemical content) means that any metal that comes in contact is likely to corrode. And I'll add—though this may be a personal problem—that I think treated lumber is ugly.

I think you're better off gluing up leg stock from thinner material if you can't find untreated lumber in a size or price range that appeals. But, there are a couple log-home builders not too far from you. I'd give them a call and see if they've any "shorts" they can sell you... or just let you take off the burn pile. That's an excellent source for good leg material.

Megan Fitzpatrick, executive editor

### Veneer Questions Answered

Thanks to Matthew Teague for the "Bow-front Entry Table" article (October 2012, issue #199). I've been wanting to try veneering, and the pictures and drawings that accompany the article made the process very clear.

But I am wondering why you would use expensive veneer for the many layers that don't show. Would it be just as good to use something cheaper, maybe by resawing the pine or red oak that I have on hand? Also, if that's acceptable, what would be the thickest dimension I could resaw and still be able to bend into the required curve?

Bill McGeehan  
via e-mail

Bill,  
I didn't use expensive veneer for the unseen layers; I used lengths cut from an inexpensive full sheet of rotary-cut maple veneer that has been taking up space in my shop for a few years. Using an inexpensive substrate for the core layers is an easy way to create the apron quickly, but there are a number of other ways you could make the front apron.

As you suggest, you could easily resaw layers from most any stock and use them as the core. When I glue up bent laminations, which is what you're describing, I resaw at the band saw and then run the layers through my thickness sander.

You can run them through your planer instead, but anything thinner than about 3/16" could blow into pieces if not attached

to a substrate. Use double-sided tape to secure thin resawn pieces to a length of plywood or MDF.

The thickness of your layers will vary depending on the species, but you should be able to get away with 1/8" or so. Resaw a single thickness and try to bend it by hand over your form. If it will do so easily, you should be fine. When in doubt, err toward the thinner side.

Matthew Teague, editor

### Any Workbench Recommendations for Kids?

Do you have any thoughts or recommendations relating to building a workbench for my 7-year-old son who loves to work with his hands?

Shaun Sabol  
via e-mail

Shaun,  
Typically, I think children should work on an adult-sized workbench and stand on a riser platform to get them to the proper height.

If you build a workbench sized for a 7-year-old, you'll end up building a workbench for an 8-year-old the next year. And so on.

When my daughter was 8, I built her a full-height French workbench (28" tall). She stood on a piece of plywood that was placed over chunks of timber. As she grew, the riser became shorter. She's now 5' 6" and works at it without any riser. **PWM**

Christopher Schwarz,  
contributing editor

## ONLINE EXTRAS

### Letters & Comments

At [popularwoodworking.com/letters](http://popularwoodworking.com/letters) you'll find reader questions and comments, as well as our editors' responses.

### We want to hear from you.

Popular Woodworking Magazine welcomes comments from readers. Published correspondence may be edited for length or style. All published letters become the property of Popular Woodworking Magazine.

Send your questions and comments via e-mail to [popwood@fwmedia.com](mailto:popwood@fwmedia.com), or by mail to 8469 Blue Ash Road, Suite 100, Cincinnati, OH 45236.



## Highly Recommended

Every time my dovetail gauge shows up in a picture or video on the blog, I get questions about it (and it recently showed up in a free video on dovetail layout).

I've had this Woodjoy Tools brass and black oxide "Precision Dovetail Template" for seven years now, and it's been worth every bit of the \$25 it cost. The gauge allows me to mark dovetails up to 1 3/8" deep, with one side for 1:8 angles, the other for 1:6. The tool is available (and it's still \$25) at [woodjoytools.com](http://woodjoytools.com).

— Megan Fitzpatrick

## POPULAR Woodworking MAGAZINE

### Customer Service

How can I contact customer service with questions regarding my subscription, including a lost or damaged issue?

Visit [popularwoodworking.com/customerservice](http://popularwoodworking.com/customerservice). Or write to Popular Woodworking Magazine, P.O. Box 421751, Palm Coast, FL 32142-1751. Or, if you prefer the telephone, call 1-877-860-9140 (U.S. & Canada), 386-246-3369 (International) and a customer service representative will be happy to help you.

When does my subscription expire?

The date of your subscription expiration appears on your magazine mailing label, above your name. The date indicates the last issue in your subscription.

Can I get back issues of Popular Woodworking and Woodworking Magazine?

Back issues are available while supplies last. Visit [popularwoodworking.com/backissues](http://popularwoodworking.com/backissues). Or if you know the exact month and year of the issue you want, call our customer service department toll-free at 855-840-5118 to order.

What if I want more information about the projects and tools I read about in Popular Woodworking Magazine? For all editorial questions, please write to Popular Woodworking Magazine, 8469 Blue Ash Road, Suite 100, Cincinnati, OH 45236. Or e-mail [popwood@fwmedia.com](mailto:popwood@fwmedia.com).

Does Popular Woodworking Magazine offer group discounts?

Group discounts are available by special arrangement with the publisher. For more details, send an e-mail to [Debbie.Paolello@debbie.paolello@fwmedia.com](mailto:Debbie.Paolello@debbie.paolello@fwmedia.com) or call 513-531-2690 x11296.

### Our Privacy Promise to You

We make portions of our customer list available to carefully screened companies that offer products and services we believe you may enjoy. If you do not want to receive offers and/or information, please let us know by contacting us at:

List Manager, F+W Media, Inc.  
10151 Carver Road, Suite 200  
Blue Ash, OH 45242

### Safety Note

Safety is your responsibility. Manufacturers place safety devices on their equipment for a reason. In many photos you see in Popular Woodworking Magazine, these have been removed to provide clarity. In some cases we'll use an awkward body position so you can better see what's being demonstrated. Don't copy us. Think about each procedure you're going to perform beforehand.



WWW.RADARCARVE.NET

## Wood Carving Duplicators

- Furniture
- Gunstocks
- Millwork
- Decoys
- Musical Instruments

*Incredibly accurate*



Thousands of Uses 505-948-0571

CARD #38 or go to PWFREEINFO.COM

## WOOD SLICER

Legendary Resaw Blade

- Cuts smoother
- Works faster
- Sounds quieter
- Stays sharp longer
- Makes veneers



Only at  
**HIGHLAND**  
Woodworking

FWW  
rated best

800-241-6748

highlandwoodworking.com

CARD #22 or go to PWFREEINFO.COM

From

# Kitchens to Heirlooms...

...Leigh Jigs Make Dovetails Easy.



Leigh Super Jigs  
**See the video**  
[leighjigs.com](http://leighjigs.com)



**LEIGH**  
Celebrating 30 years

**free WEBTV**  
for woodworkers.

New episode coming in February!

THE **HIGHLAND**  
WOODWORKER

Moment with a Master - Alfred Sharp



PHOTO BY: ROBIN HOOD

Hosted by Charles Brock

[www.thehighlandwoodworker.com](http://www.thehighlandwoodworker.com)

CARD #91 or go to PWFREEINFO.COM

Lie-Nielsen  
**TOOLWORKS**  
INC.

Heirloom Quality Tools®



MADE IN  
MAINE, USA

[WWW.LIE-NIELSEN.COM](http://WWW.LIE-NIELSEN.COM) • 1-800-327-2520

CARD #29 or go to PWFREEINFO.COM

## THE WINNER:

# Router Plane Auxiliary Base

I had a project on which I needed to rout out a large area about  $\frac{3}{8}$ " deep. It was a wooden case for a Nook reader, and the eReader had to fit into the excavation.


I had poor luck with my power router. It failed miserably. I had poor visibility of the bit, and the tool was extremely aggressive.

I decided to break out my large router plane, but the area to be routed was too large for it to span the opening from edge to edge.

A light bulb went off, and I decided to make an acrylic auxiliary base for the router plane. The tool was already drilled with slots for an edge fence, so it was simply a matter of drilling the

auxiliary base for  $\frac{5}{16}$ " holes to align with these slots and another  $1\frac{1}{4}$ " hole for the router blade to pass through. I used two  $\frac{1}{4}$ "x20 1" T-bolts, flat washers and wing nuts to fasten the base to the router. I had to counterbore the bottom of the base to fit the T portion of the T-bolt. I used a Forstner bit and chisel to shape the counterbore.

I eyeballed the hole that the blade came through – dumb. Let my experience be helpful to you. The blade came

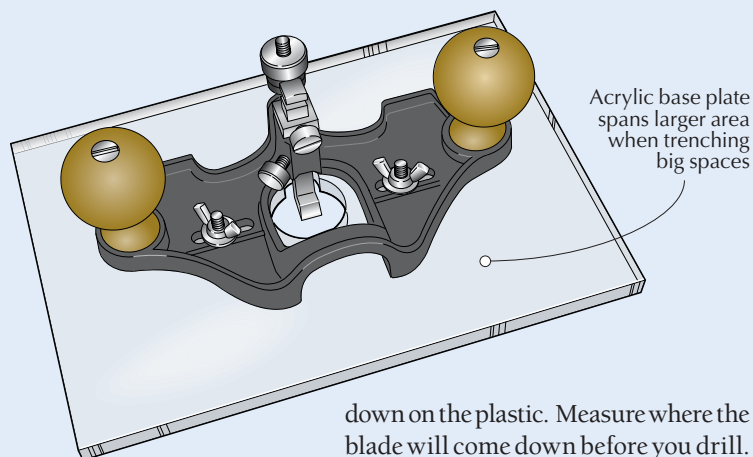

down on the plastic. Measure where the blade will come down before you drill.

I used a  $\frac{3}{8}$ " acrylic sheet about  $6\frac{1}{2}$ " x  $9\frac{1}{2}$ ", but you can vary the dimension to suit your situation. Just make it wide enough to span the work edge to edge when at the extreme.

I was quite happy with the added stability of the router and I was able to plane the excavation quickly and smoothly. I think I will also find this auxiliary base useful to excavate fields in relief carvings.


Walter Lees  
Tempe, Arizona

## Easy Way to Square a Table Saw's Miter Gauge

The stock miter gauge supplied with table saws is notoriously inaccurate. However, a precise way to square the miter gauge is also one of the easiest.

To confirm that my miter gauge is square (assuming the miter slot is parallel to the blade), I attach two rare earth magnets about 22" apart into the right-hand miter slot. The magnets are

Rare earth magnet on edge and spaced far apart

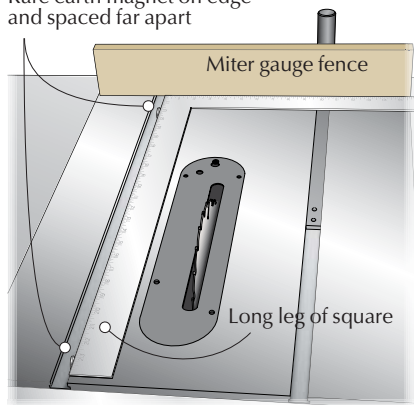


attached to the edge of the slot so they extend vertically above the table surface.

Next, I set a carpenter's square between the miter gauge's fence extension and the two magnets. It works best to first align the square with the magnets, then, holding the square to prevent it from moving, align the miter gauge fence extension to the square.

This procedure owes its precision to the accuracy and long baselines of the carpenter's square, so the magnets should be placed close to the ends of the long leg of the square.

Bill Wells  
Olympia, Washington

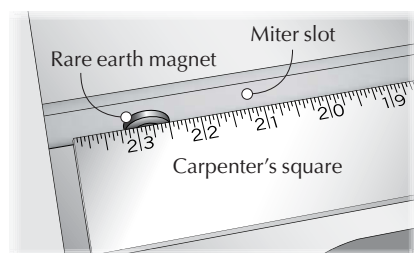

## New Tool From the Art Store

We all know that wetting end grain with mineral spirits or alcohol before planing can make for an easier job and smooth finish. But sometimes when I'm working just a small bit of end grain, I'm guilty of ignoring this step. It just seems like too much trouble to find the can, wrestle it open (which invariably means dealing with those "push to open" safety lids or popping it with a screwdriver) and then deal with the smell and the mess of ragging it on.

It recently occurred to me that I have the perfect tools for this from the art world – artist-grade marker pens. I've been using the Copic brand, but there are others that are also alcohol based. Most brands offer a colorless marker that has the alcohol solvent but no colored ink inside (colorless markers are used to blend colors you've already applied). These markers work great for quickly applying some solvent to work a small bit of end grain.




## How to Draw an Arc

While working on a set of bunk beds, I needed to make an arc on the top of a headboard and wondered how I could quickly create a gentle rise. The problem was, how to get an arc that was symmetrical between two points. And I wasn't too keen on the pencil and string method.

I figured I could set the radius of the arc easily and without a lot of calculation if I used a couple of simple items crafted from scraps in my shop. The drawing shows a pivot point I used to bend a  $\frac{1}{4}$ "-thick strip of oak I ripped from a piece slightly longer than the headboard. Find the centerpoint on both the item that needs the arc and the strip used to trace the arc.

Once I measured my 1" marks on both ends (an arbitrary dimension I might add), I then bent the strip from both sides down to those marks and clamped them in place with a couple of scrap blocks. Then, I was able to scribe

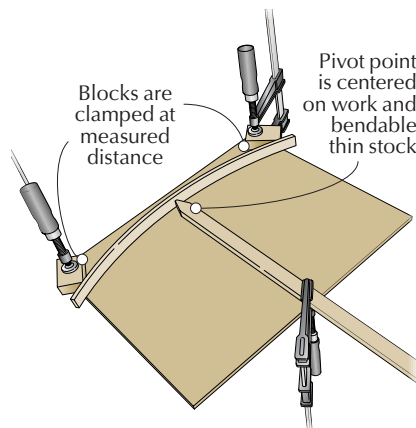

the arc on both sides of the centerpoint to assure symmetry.

This technique can be used for establishing an arc of various sizes from gentle to more severe depending on where you clamp the ends.

Steve Waskewicz  
Elbert, Colorado

## Runner for Crosscut Sled

I had a little trouble lining up the runner for a crosscut sled I was making. No

matter how carefully I adjusted it, I still had a small amount of binding where screws caused minor flexing of the ultra high molecular weight (UHMW) plastic. So I cut a shallow rabbet ( $\frac{1}{16}$ " deep x  $\frac{3}{4}$ " wide) on the bottom of the plywood for the sled and set the runner in it. The sled ran perfectly smooth.

Just as an experiment, I cut a piece of hardwood to use as a runner, and had the same consistent results. There was no fussing with the placement or trimming of the runner needed. **PWM**

Bill Lattanzio  
Spring City, Pennsylvania

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**TRICKS ONLINE:** We post tricks from the past and film videos of some Tricks of the Trade in use in our shop. They're available online, free. Visit [popularwoodworking.com/tricks](http://popularwoodworking.com/tricks) to read and watch.

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)

## Cash and prizes for your tricks and tips!

Each issue we publish woodworking tips from our readers. Next issue's winner receives a \$250 gift certificate from Lee Valley Tools, good for any item in the catalog or on the web site ([leevalley.com](http://leevalley.com)). (The tools pictured below are for illustration only, and are not part of the prize.)

Runners-up each receive a check for \$50 to \$100. When submitting a trick, include your mailing address and phone number. All accepted entries become the property of *Popular Woodworking Magazine*. Send your trick by e-mail to [popwoodtricks@fwmedia.com](mailto:popwoodtricks@fwmedia.com), or mail it to Tricks of the Trade, *Popular Woodworking Magazine*, 8469 Blue Ash Road, Suite 100, Cincinnati, OH 45236.




I particularly like the Copic brand because there's a marker that's almost 1" across. When the marker dries out it can be refilled with alcohol or, as I prefer, mineral spirits. You can also purchase an empty marker and find instructions for filling it at the company's web site ([copicmarker.com](http://copicmarker.com)). Refill it slowly a couple times because the initial fill takes a while to soak into the dry tip. If you add too much it can spill.

Joshua Pierce  
Burlington, Vermont

## Magic Heating Bag

Liquid hide glue often needs to be warmed up before it's used – particularly in a cold shop. I find it inconvenient to heat up the glue in a pot of hot water every time I need a bit of it.

My quick trick is to use a magic heating bag warmed in a microwave oven to bring the temperature to about 120° Fahrenheit. I then wrap it around the glue bottle for 20 seconds or so. The

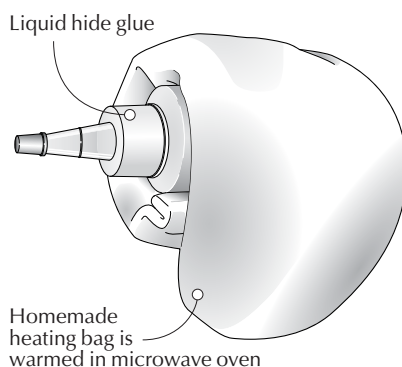

heating takes a minute or so, including the microwaving, and it's all done dry. Use a meat thermometer first to check how long it takes to warm up the bag to 120° F and note the time for future use.

Instead of buying a commercial heating bag, I used an old clean sock and filled it with uncooked rice, then close the sock's opening by sewing a hem.

Charles Mak  
Calgary, Alberta

# Blue Spruce Firmer Chisels

These traditional tools are a throwback for a thoroughly modern maker.

Perhaps the last tools I ever expected to come out of the Blue Spruce Toolworks are the most traditional set of modern bench chisels I have ever used.

After all, Dave Jeske of Blue Spruce has spent all of his toolmaking career building gorgeous tools that have a definite modern and West Coast flavor. His knives, chisels, awls and even his mallets are about as close to contemporary sculpture as you can get (and I mean that as the highest compliment imaginable).

But Dave's latest chisels are complete throwbacks—they have 18th- and 19th-century design details, use old-fashioned high-carbon steel and they have thin blades that remind you of using an excellent old firmer chisel.

But like all of Dave's tools, the fit and finish is taken to a level that few manufacturers (or even custom toolmakers) can ever achieve.

So let's take these chisels apart and find out what makes them work.

These are long tools – about 11<sup>1</sup>/<sub>4</sub>" overall – with a 5<sup>1</sup>/<sub>4</sub>"-long O1 blade, brass ferrule and octagonal hickory handle. The handle is superbly finished (like all Blue Spruce products) and the tapered octagonal shape is comfortable and orients the tool so you always know where the bevel is. The slight swelling by the ferrule is the perfect place to push forward with your thumb and forefinger when paring.

The ferrule itself is worth note. Un-



**Old but new.** Blue Spruce has broken with its tradition and produced a traditional tool. These new firmer chisels would look at home on the bench of a 19th-century joiner.

like most makers, Dave has always used a closed ferrule, which gives a neat appearance, increases its durability and hides the tool's internal structure (more on that in a second).

The blade tapers gracefully from .195" at the ferrule to .110" where the bevel begins. This tapered thickness lightens the weight of the tool, which makes it easy to wield and makes the tool more sensitive and responsive during paring.

Even more important – at least for me – is that the blades are made from a fine-grained O1 steel that is hardened to about 58 on the Rockwell "C" scale. That means they won't hold an edge as long as A2 chisels, but they are quite easy to sharpen on any sharpening media, including oilstones. The other nice thing about O1 is that it doesn't chip like A2. So when an O1 edge gets dull it just becomes harder to push. An A2 edge tends to get "toothy" and scratch your work.

OK, now back to the ferrule for a second. The ferrule hides the tang of the tool as it enters the hickory. Inside, the blade has a significant rim where it



**Hidden strength.** The closed ferrule of the Blue Spruce chisel hides a stepped tang that protects the handle from splitting.

enters the wood. This rim reduces the chance that you'll split the handle when you strike the tool – a typical problem with tang chisels.

Overall, these tools are tied with the Lie-Nielsens as the best chisels I have ever purchased. While the Lie-Nielsen's socket construction and short length make them unbeatable when chopping, the long and tapering shape of the Blue Spruce tools give them the edge when paring. Either brand of tool is an excellent choice for the woodworker who wants the best.

Yes, these tools cost a lot, but they will be appreciated for many generations to come. You might as well buy them when they are new.

— Christopher Schwarz

## Blue Spruce Firmer Chisels

Blue Spruce ■ [bluesprucetoolworks.com](http://bluesprucetoolworks.com)

Street price ■ \$390, set of 5 (1<sup>1</sup>/<sub>4</sub>"-1")

■ VIDEO Watch Dave Jeske sharpen a marking knife so it tracks better.

Prices correct at time of publication.

CONTINUED ON PAGE 16



## SUPER GENERAL™ 10" x 40 Tooth Blade

# INFINITY

- ✓ Ripping & Crosscutting
- ✓ Hard & Softwoods
- ✓ Laminates & Melamine
- ✓ Full & Thin Kerf Versions



Item: 010-044

**SALE: \$99<sup>90</sup>**



**infinitytools.com | 877-USA-BITS**

Scan for Info

CARD #23 or go to PWFREEINFO.COM

# Forrest Blades

For building cabinets and fine furniture, nothing beats Forrest saw blades.

Craftsmen appreciate the way our blades deliver smooth, quiet cuts without splintering, scratching, or tearouts. They know our unique grade C-4 micrograin carbide, proprietary manufacturing process, and hand straightening produce exceptional results. In fact, independent tests rate us #1 for rip cuts and crosscuts.

*"From the first cut on, I realized that this blade was a bargain at any price! Nothing else I have cuts comparably."*  
Calvin Brodie, Spanaway, WA



Order from any Forrest dealer or retailer, online, or by calling directly. Our blades are manufactured in the U.S.A. and backed by our 30-day, money-back guarantee.

## Forrest Quality Shows

**Woodworker II**—Best rated, all-purpose blade for rips and crosscuts.

**Chop Master**—Perfect for tight, perfectly cut miter joints without splinters.

# FORREST

**The First Choice of Serious Woodworkers Since 1946**

www.ForrestBlades.com  
1-800-733-7111  
(In NJ, call 973-473-5236)

**Woodworker II**  
Fine Woodworking



**Chop Master**  
Woodshop News



**Duraline Hi-AT**  
Woodshop News




**Dado King**  
Wood Magazine



© 2012 Forrest Manufacturing

Code PW

CARD #13 or go to PWFREEINFO.COM

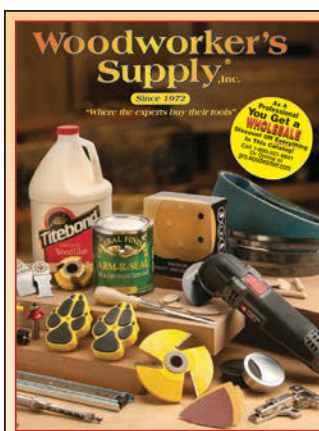


If you are in a woodworking business... this could be the most valuable tool in your office.<sup>SM</sup>

Please call  
**1-800-321-9841**  
for your 750 page catalog AND  
mention code pw0113

**FREE**  
to woodworking  
businesses.

Visit us at  
[pro.woodworker.com/pw0113](http://pro.woodworker.com/pw0113)

CARD #54 or go to PWFREEINFO.COM

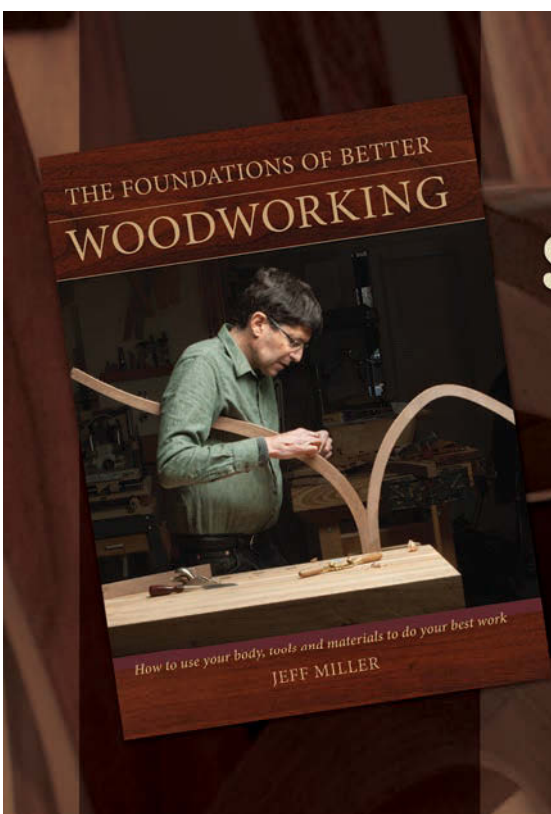

Discover the secrets to producing beautiful furniture ...

# starting with the fundamentals.

Uncover the fundamental skills that guarantee accurate saw cuts, precise joints and beautiful furniture that will last for generations.

Master the essential, but often overlooked principles with craftsman, teacher and noted woodworking author Jeff Miller.

**ORDER NOW YOURS NOW**

SKU W8062 • 300 pages • Hardcover • \$29.99

This and many more Popular Woodworking DVDs are available at  
[ShopWoodworking.com](http://ShopWoodworking.com) or call (855) 840-5118 to order.

## Micro Fence Micro Plunge Base

In the world of routers and routing accessories, it seems that small is big these days. The popularity of trim routers has been growing for some time; in fact, it's now been a couple years since we praised Micro Fence's plunge router base for the Bosch Colt, and we recently reviewed Makita's compact router.

Now Micro Fence, long known for its precision aftermarket router accessories, has released a 4"-diameter plunge base designed for small, high-speed rotary tools such as those from Dremel and Proxxon. The micro base can also be used with pencil die grinders.

### Micro Plunge Base

**Company Name** ■ [microfence.com](http://microfence.com) or 800-480-6427

**Street price** ■ from \$299.95

■ **VIDEO** Watch a short video on line-and-berry inlay using a router.

*Prices correct at time of publication.*

The base affords the user a wide-open view of the work being done thanks to its open-sided, horseshoe-shaped design. Like other Micro Fence precision products, this base is easily height-adjustable for depth of cut in one thousandths of an inch increments.

The Micro Plunge Base serves a number of needs for woodworkers when precision and high tolerances are a must, including hinge mortising, inlay, guitar building, scale model and miniature making and other fine detailing.

The unit weighs a mere 3 pounds, yet provides a sturdy platform for precision routing. Like most plunge bases, it has a three-position turret plunge-stop mechanism. It also comes with an onboard battery-powered gooseneck light. Buyers can specify the insert adapter they need for mounting their rotary tool in the base. Dust hoods, a template guide and centering bit are



available at an extra charge.

In addition to commonly available 1/8"-shank bits for rotary tools, Micro Fence offers 1 1/2"- and 2 1/2"-long miniature solid carbide end mills ranging from 1/32" to 1/8" diameter.

— Steve Shanesy

## Veritas 'Workshop Striking Knife'

Spear-point marking knives are my favorite marking knives because they're a good all-around choice for most layout tasks in the shop. Because a spear-point knife has two bevels and a flat back, it can easily register against a guide on either the right or left side—very handy when marking dovetails. And the flat back means you don't have to rotate the tool to use it up against a guide (as you do with an X-Acto knife); that means you can sneak a thin spear-point into the smallest of spaces.

Spear-points are, however, a bit tricky to sharpen, and the point is easily

broken off if, say, the knife rolls off the bench of someone who's borrowed it.

I've long used a premium spear-point knife, and once I narrowed my choice based on blade thickness and angle, I made my final selection based on ergonomics; it simply felt right in my hand. But it wasn't cheap, and ideally I'd have second one for the shop at work.

Now, Veritas offers a wallet-friendly spear-point "Workshop Striking Knife" that's awfully nice for the price. At less than \$10, I can afford a handful—one for work, and a few to loan.

The 1/32"-thick, 5/16"-wide A2 blade has a 55° included angle at the tip, 25° bevels and a flat back (typical angles for a spear-point knife). The black contoured handle is nylon-reinforced ABS plastic with a flat on each side to keep it from rolling off the bench, and to help register where your fingers should grasp the tool. It comes with a guard to protect the tip in storage.



While I prefer the weight and feel of my premium knife in my hand, the Veritas knife works well—and the price is hard to beat. It's an excellent choice as a backup knife or as a loaner—or as a primary knife when budget is a concern. **PWM**

— Megan Fitzpatrick

### Veritas Striking Knife

**Lee Valley Tools** ■ [leevalley.com](http://leevalley.com) or 800-871-8158

**Street price** ■ \$9.95/1, \$8.95/3 or more

■ **ARTICLE** Read our article of spear-point marking knives; it's free on our web site.

*Prices correct at time of publication.*



# TOUGH Dries Natural Color, No Foam GLUE



Gorilla Wood Glue's premium formula creates a cross-linking bond to provide superior strength with a Type II water resistance, indoors and out.



**For the Toughest Jobs  
on Planet Earth®**

[www.gorillatough.com](http://www.gorillatough.com)

©2013 The Gorilla Glue Company

CARD #18 or go to [PWFREEINFO.COM](http://PWFREEINFO.COM)

# Laser Engraving & Cutting Systems



**MADEiNUSA**

**Systems Starting at \$7,995**

[sales@epiloglaser.com](mailto:sales@epiloglaser.com) • 888-437-4564

To request a brochure, DVD, and laser engraved and cut samples  
visit [epiloglaser.com/popwood](http://epiloglaser.com/popwood) today.

CARD #56 or go to [PWFREEINFO.COM](http://PWFREEINFO.COM)

# A Practiced Eye

Straight lines will help you generate pleasing curves.

I know a potter who's worked clay on a wheel for more than a quarter-century. His practiced eye has a keen sense for curved forms, honed by shaping tens of thousands of pots. I admire his work and also the fact that he still gets excited at the thought that there's more to be learned about curves.

That's humbling and a bit scary. One of the most difficult things to visualize is a fair curve; it's like a slippery snake that's hard to pin down. I want to feel comfortable and confident designing with curves, but the thought of throwing a thousand pots is not an option. Thankfully, our woodcraft tradition offers powerful lessons that can help.

## Visualize a Curve

One reason curves can seem so difficult is that we see them in an endless array. Nature displays curves




FIG. 125.


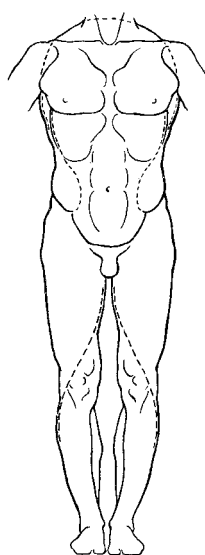


FIG. 126.

**Rooted in the body.** Perhaps we are so captivated by curves because they are rooted in our human form.

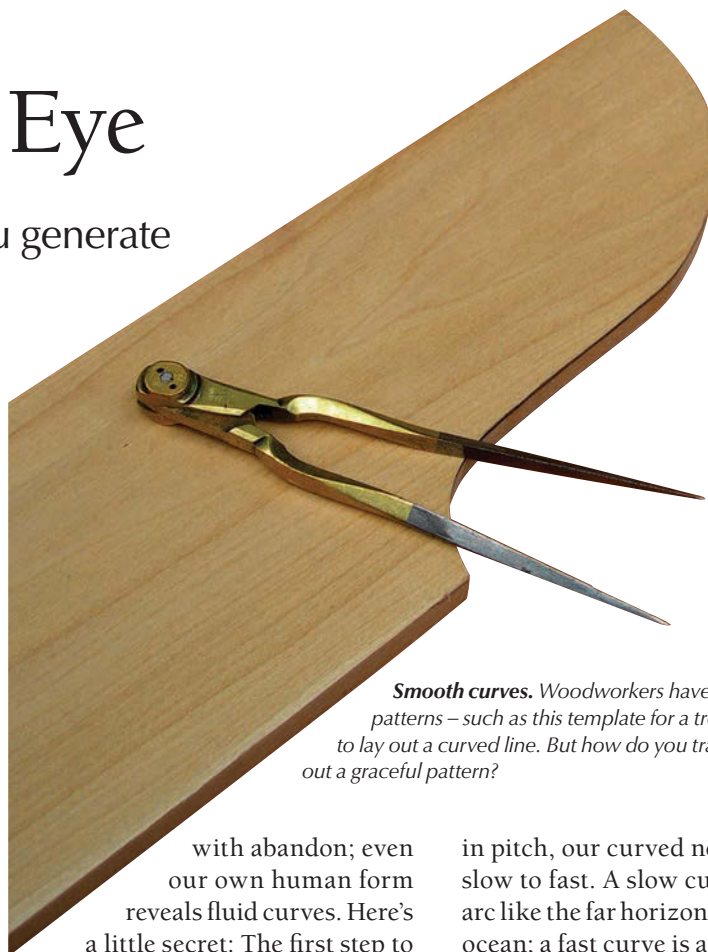

**Smooth curves.** Woodworkers have long used patterns – such as this template for a trestle table base – to lay out a curved line. But how do you train the eye to lay out a graceful pattern?

with abandon; even our own human form reveals fluid curves. Here's a little secret: The first step to imagining a curved line is to begin with a straight line.


Pre-industrial design literature is filled with examples of curved layouts generated with simple geometry using a straightedge and a pair of dividers. They might appear overly simplistic, but they contain valuable clues to help you design with curves.

Begin by learning a few simple curved notes, which are much like musical notes (as shown below). However, unlike musical notes that vary

in pitch, our curved notes vary from slow to fast. A slow curve is a gentle arc like the far horizon line out on the ocean; a fast curve is a sharper bend, sort of like that tricky exit ramp on the highway that tries to sling you off the pavement.

## Take a Closer Look

This sinks in better if you actually draw it, so pull out a straightedge and compass. Pick one of the simple constructions shown below, and carefully draw it on paper. They each use either the whole straight line or half the straight line as a radius to locate a fulcrum to form each curve.

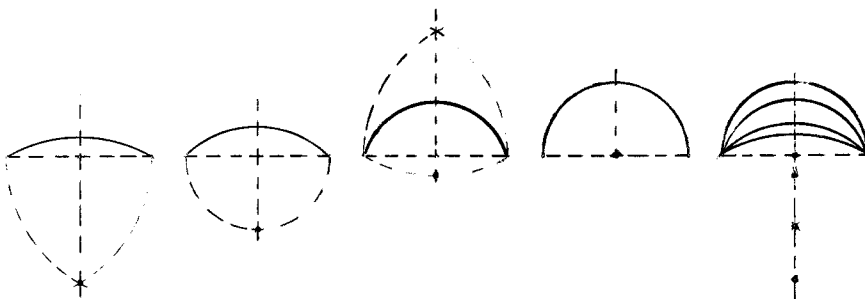

**Chords & radii.** All these examples use either the half or the whole chord as a radius to locate the fulcrum to scribe each curve. The last figure on the right shows them all superimposed.

CONTINUED ON PAGE 20



# See our top selling router tables, bits & jigs at [MLCSwoodworking.com](http://MLCSwoodworking.com)

## "Cabinet Making Set"

Six 1/2" shank carbide tipped router bits make classic kitchen and fine furniture cabinet raised panels and drawers.

Undercutter #8389...\$119.95

Standard #8387...\$114.95



## "Don't Stand Stock On Edge"

Rout wide stock FLAT on the table with tall bits in horizontal position! The Horizontal Benchtop Router Table is perfect for raised panels and mortise and tenon. The miter T-track accepts accessory tops.

#9767.....\$179.95



## "Tilting Top"

Accessory top tilts up to 45°. Create offset angles that cannot be cut on a regular router table.

#9764.....\$59.95



## "Mortising Top"

Accessory top. A safer and easier way to cut mortise and tenon joints.

#9766.....\$79.95



## "Route 66"

66 piece carbide tipped router bit set includes straight, round over, chamfer, cove... 30 total profiles! Wood storage box can be wall mounted.

1/2" shank • #8383.....\$189.95


1/4" shank • #6083.....\$189.95



## "Sliding Table Top"

Free Shipping! The Precision Router Table's large, smooth sliding, extruded aluminum top makes difficult routing easy and exact. Variable opening inserts in "rock solid" fixed cast-iron. Split fence & dust hood.

#9463 .....\$469.95

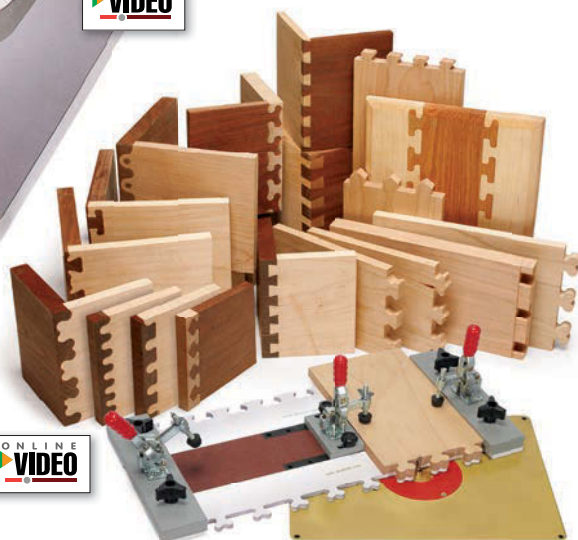

## "When Any Old Joint Won't Do..."

The Fast Joint System with matching templates makes creative, custom joinery simple. Includes the jig, joint templates, clamps, bushings and router bits. See the 20 Template Set online.

4 Template Set #9411.....\$169.95 • 11 Template Set #9422.....\$269.95

1-800-533-9298

PROFESSIONAL ROUTER BITS & WOODWORKING PRODUCTS



**MLCS**


**FREE SHIPPING!**

IN CONTIGUOUS USA • P.O. BOX 165 PM, HV, PA, 19006 \*2012

Note too that our straight line is also a chord that's spanned by our curve. From a geometry standpoint, these arcs have some unique properties and these simple curves are used endlessly in traditional design (see "Simple Curves are all Around Us"). Yet the most profound thing is not that you learned to draw a few simple curves; the real power in this is that you drew a curved line that visually references directly off a straight line. This is a big deal because you are giving your mind a way to compare a slippery thing (a curve) with a straight line, something we all can imagine clearly.

Take a few moments and draw four simple curves with your compass. Then draw a series of parallel lines and practice drawing freehand the same curves. You'll notice immediately that it's easier to draw a freehand curve when you have that straight line as a reference.

Another great exercise is to draw a straight line and randomly divide it with hash marks. Experiment with creating combinations of curved lines – fast and slow, convex and concave, large and small. This is like learning to speak with curves.

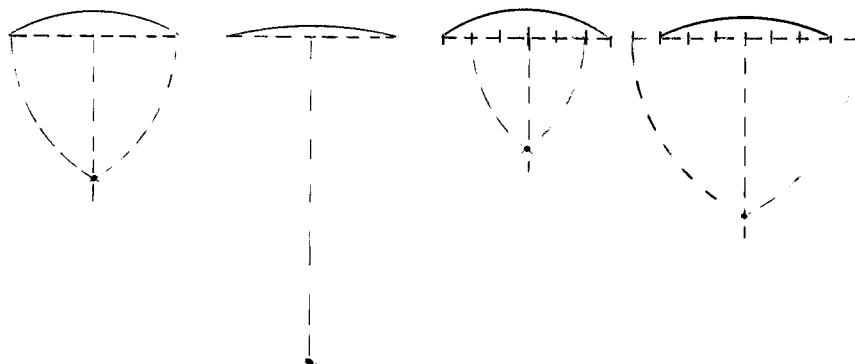

**Slow & fast.** Starting with our simple note on top, we make it slower by doubling the chord. The right two are small tweaks using a fraction of the chord.

## Tweak a Curve

As your confidence and ability improve, so will your desire to experiment and tweak curves to satisfy the vision forming in your mind. If a curve needs a bold correction you can simply bump it up or down on the scale of notes to the next slower or faster one. Note also, if you need a curve significantly gentler than the slowest of these notes, you can double or triple the chord length to soften it.

But what if you want to tweak a curve just a tiny bit? You can make smaller tweaks by dividing your chord into six or seven equal parts and use a

fraction of the chord to locate your fulcrum point. In this way you can bump a curve in very slight increments and still know exactly how you got there, as shown above.

This may sound mechanical, but with a little practice you'll be able to see that imaginary straight line and make subtle adjustments intuitively.


These few simple geometric arcs barely scratch the boundless possibilities of the curved line. Yet this is an important first step. Once you become familiar with this curved vocabulary you'll be amazed to see how often these notes show up right under your nose. Better still, you've started your journey of 10,000 pots. **PWM**

*George is the author of two design DVDs (Lie-Nielsen Toolworks) and co-author with Jim Tolpin of the forthcoming book "By Hand & By Eye" (Lost Art Press).*

## SIMPLE CURVES ARE ALL AROUND US

The simple geometric arcs below were used extensively to tackle design problems in traditional furniture and architecture. The slowest curve is based on one-sixth of a circle and was used to lay out the concave flutes carved into a stone column (right), the projection on a pulvinated frieze (center) and the gentle cyma curves on a moulding (left).

It's interesting to note that wooden hollow and round moulding plane profiles are based on this one-sixth of a circle. Instead of viewing these simple curves as something mechanical or stiff, artisans used these simple arcs like words to create poetry. —GW

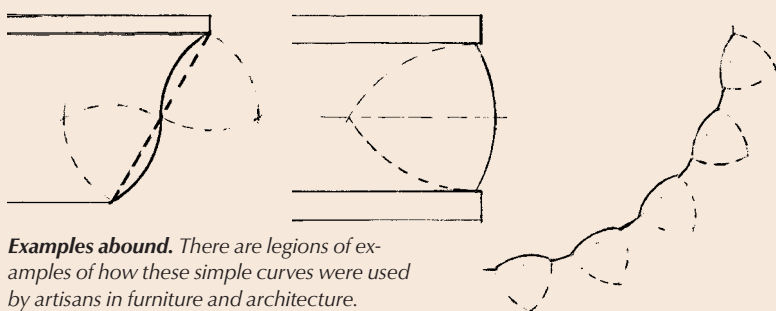

## ONLINE EXTRAS

For links to all these online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**BLOG:** Read more from George R. Walker on his Design Matters blog.

**IN OUR STORE:** George R. Walker's DVDs.

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)

### About This Column



Design Matters dives into the basics of proportions, forms, contrast and composition to give you the skill to tackle furniture design challenges with confidence.






**800-472-6950**

LaVergne, TN

**Great Carbide Bits  
Great Prices**

**What can we help you make today?**

**Wood Gear Clock Kit \$249**

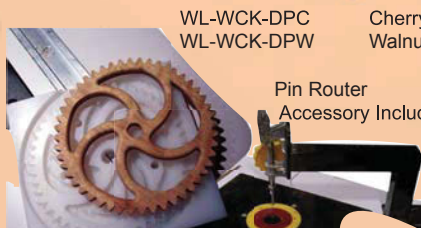

WL-WCK-DPC  
WL-WCK-DPW

Cherry Kit  
Walnut Kit

Pin Router  
Accessory Included!



**Plantation Shutters couldn't be easier...  
or more economical!**



**WL-2055  
\$69**

**FREE  
instructions  
online**



**No table saw? No worries... with  
the TrueTrac™ Saw System!**



**Watch it  
in action!**

**TrueTrac™ SPECIAL**

**While supplies last!**

**Buy a TrueTrac™  
Model 570TPC  
or 105TPC**

**and receive a FREE  
CMT 7 1/4" Saw Blade.**



**Do you have  
our latest  
catalog?  
Request one  
or view  
it online.**



**For creating forms, arcs  
and curves, the CMT  
flexible template is easy,  
safe and accurate.  
39", 47" & 78" lengths  
available starting at  
\$61.99.**

**Woodline.com - your complete source for**

**CMT ORANGE  
TOOLS™**



**Where the Contractor, Woodworker and Cabinetmaker Meet**

**at 25% off list prices.**



**WOODLINE**

**Quality Carbide Router Bits,  
Shaper Cutters & More**

**800-472-6950**



For sales  
promotions and  
upcoming events

**Like Us On  
facebook**



CARD #50 or go to PWFREEINFO.COM







# Southern Cellarette

BY GLEN D. HUEY

Combine simple construction and sophisticated proportions.

In 1760, Dutch gin bottles made their way to the Colonies. Soon thereafter, the first known example of a lidded box designed to hold those gin bottles was built. Many of the bottle boxes, gin boxes or cellarettes, as they are known, have their origin in the Roanoke River basin area – cellarettes were not produced in major southeastern centers such as Baltimore and Charleston, S.C. Examples, however, are found throughout the North Carolina back country and as far west as middle Tennessee, where the furniture design changes into sugar chests.

Cellarettes and sugar chests share many characteristics, but there are distinct differences between them. Sugar chests are generally a single unit with the box and legs attached to one another, whereas the box portion of a cellarette is not attached to its base (you never knew when spirits would need to be hidden from unexpected guests). Also, a cellarette interior is partitioned to hold 12 or 16 bottles. A sugar chest is typically divided into two or three compartments.

This cellarette is based on a piece originally constructed in Bertie County, N.C., in the last quarter of the 18th century. It is part of a group of cellarettes built by Micajah Wilkes – as published in 2009 in Thomas Newburn and James Melchor's "WH Cabinetmaker – A Southern Mystery Solved" (Legacy Ink Publishing).

## Get Boxed in

The box of the cellarette is through-dovetailed at all four corners and sits on a base. You could build the base then build a properly sized box to fit, but because dovetails are more challenging than mortise-and-tenon joinery, I built the box first then built my base to size. The top and bottom are attached to the completed box, then the lid is sawn free.

To begin, mill your box front, back and sides to thickness and size then lay



**Interior view.** The case dividers keep bottles from knocking together as you transport your liquor.

out your dovetails – tails in the front and back panels with pins on the ends. I'm a pins-first builder, so I began on the end panels. Use a dovetail saw to cut and define eight pins with two half-pins at the outside edges. From here you can remove waste through traditional methods, or power up the process as I did using a router and straight bit.

Power extraction begins with an auxiliary fence clamped flush with your panel's end. This supports your router as you work. Adjust the depth of cut so your bit just reaches your scribeline then rout away the waste between the pins without dinging them. The waste that's left after routing is easily removed using a saw. Because the dovetail sockets are too narrow for most flush-cut saws, use a hacksaw blade. Hold the

blade tight to the socket bottom as you cut to complete the pins in the two end panels.

Next, transfer the pin layout onto your tail boards. Here you can use a band saw or handsaw to define your tails; with eight tails, you should just leave your transfer lines for a snug fit. Remove the waste using a mallet and chisels, then fit the joint. Tweak your fit as needed to achieve a snug joint.

When you're sure your box goes together, lay out and cut dados for the bottle dividers. On your bench, position your



**Quick work.** A sacrificial support and a router with a straight bit easily hogs away waste from between your dovetail pins.



**Simple jig for layout transfer.** A 90° jig holds the pin board as you transfer your layout to the tail board.



**Accuracy counts.** Dados for the bottle dividers need to match up exactly. Lay them out on one panel then transfer the layout to the second panel to make sure your dados match.



**Lose your rule.** Measurement could lead to mistakes, so the best method to locate the cuts for the egg-crate joinery is by direct transfer.



**Another simple jig.** A sacrificial fence with  $\frac{1}{4}$ " plywood attached to the bottom acts as a jig. The plywood extends beyond the front face of the fence to carry the divider material.

front and back panels with their bottom edges touching and aligned. Equally divide the interior of your box into four sections. Depending on your dovetail work, your dividers should be spaced at  $3\frac{11}{16}$ " between each divider. Using a router,  $\frac{1}{4}$ " router bit and a simple jig, cut 5"-long dados for the bottle dividers.

Repeat the same procedure on your end panels to divide the area into three sections. The distance between dividers should be  $3\frac{3}{8}$ ". Square the end of each dado with a  $\frac{1}{4}$ " chisel.

## Egg-crate Dividers

Mill your bottle-divider material to  $\frac{1}{4}$ " thick. You want a snug-but-slidable fit to your grooves. Position a long piece of stock against the bottom edge of your box front or back, then transfer the layout of the dados onto the divider stock. Mark both sides of each dado. Repeat this step for the second long divider and the three short dividers so they match the dados in the box's end panels.

Divider parts are joined using an egg-crate joint. A simple jig attached to your table saw miter gauge aids in making the cuts. Due to the height of the joint, which is half the width of your stock or  $2\frac{1}{2}$ ", a dado stack won't work for this operation; an 8" stack does not allow  $2\frac{3}{4}$ " in height ( $2\frac{1}{2}$ " plus the  $\frac{1}{4}$ " plywood). Set your table saw blade to the correct height then pass your jig over the blade. The cut in the jig indicates where to position your stock for the series of cuts. Each slot opening is completed in two passes.

## SUPPLIES

### Horton Brasses

[horton-brasses.com](http://horton-brasses.com) or 800-754-9127

3 ■ pulls w/post & nut  
#H-10S  $2\frac{3}{4}$ " boring, \$7.75 each

1 ■ box lock  
#LK-6, \$17

1 ■ round keyhole escutcheon,  
#H-13  $1\frac{1}{8}$ " dia., \$2.25

1pr. ■ brass desk hinge, antique finish  
#H-71, \$20 per pair

Prices correct at time of publication.



**Nailed it.** Because the nails that hold the bottom can be seen when your box is separate from the base, use a  $\frac{1}{4}$ " fine finish reproduction nail for authenticity.

Set your divider so it rides on the plywood and is tight to the fence. Align your layout mark to the cut made in your jig. Pass the divider and jig over the blade. Next, slide your divider so the layout mark is aligned with the second side of the slot and make a second pass. Repeat these steps until all your slots are cut in all the dividers.

Slip the parts together then fit the unit into your box. With the dividers fit, sand the interior of your box and the divider parts to remove all tool marks. Apply glue to the pins and tails of your box then assemble your box. Clamp as needed.

Mill the bottom to size and thickness. Apply glue to the front edge and about 6" back on each side, then nail the bottom to the box. Remember to install your dividers before attaching your bottom.

## Hidden Connection

The box's top panel is profiled along its front edge and both ends. Use your favorite profile – my choice was a classic cove-and-bead bit on the top edge and a  $\frac{3}{16}$ " roundover bit along the bottom edge. I'm not fond of exposed nails used to fasten a top. Because the underside of the top panel is easily seen with the cellarette open, I decided to nail the top panel in position through the recesses below the panel's inlay.


With the top panel right-side up on the bench, invert and position your box so it's centered from side to side and set flush with the back edge of the panel. Mark around the box to leave a light pencil line on your panel. These lines are going to help determine the panel's inlay.

You could cut the inlay recesses in any number of ways, including hand work or pattern routing, but my choice is a router with a  $\frac{3}{16}$ " straight bit – some of the work involves a guide bushing while the majority is routed using a router with an attached fence.

Each of the inlaid lines are set  $\frac{1}{4}$ " toward the center of the top from the pencil lines drawn earlier, so the nails align with the center of the box parts below. Measure and mark a couple points then use a straightedge to draw



## PANEL INLAY

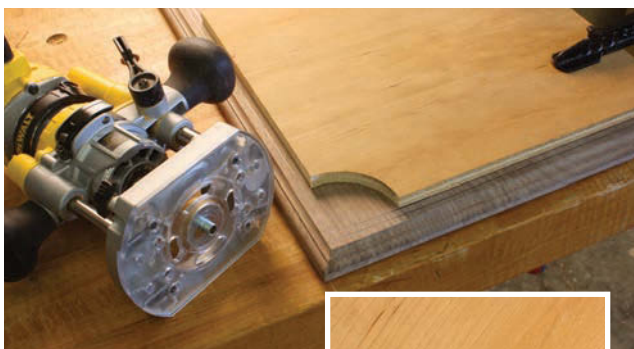

**Great teamwork.** A  $5/16$ " outside-diameter bushing and  $3/16$ " straight bit paired with a plywood template is all it takes to cut in the corner inlay recesses.

**Leave wiggle room.** While you will ultimately cut the recess from line to line, it's best to stop short of the layout lines when routing (as shown on the left edge).






***It's all in the setup.*** Attaching a fence to your plunge router is the best way to cut the recess for the straight sections of inlay. Slight adjustments may be required as you move from line to line.



**Hand work cleans up.** Use sharp chisels to clean up and blend your corner recesses so they flow cleanly into the straight areas.

the outer lines. Set a combination square to mark the back line  $\frac{1}{4}$ " in from the outer line.

That's the layout work for the straight sections of the inlay. The corners, however, are 2"-radius quarter-circles. A shop-made jig works best for this job. On a square-cut piece of plywood, set the point of your compass directly on one corner then draw the design. Use a band saw to cut the radius

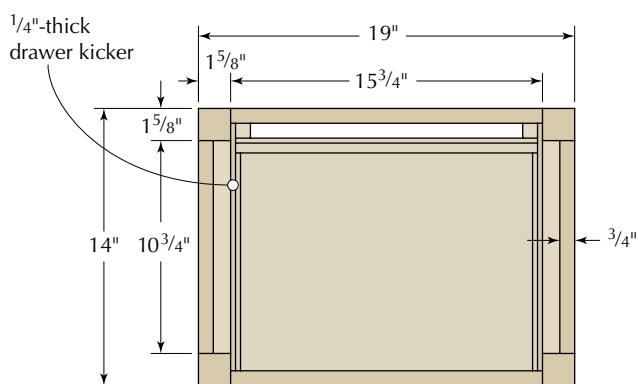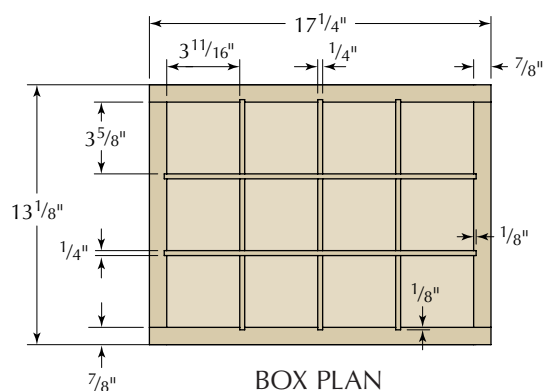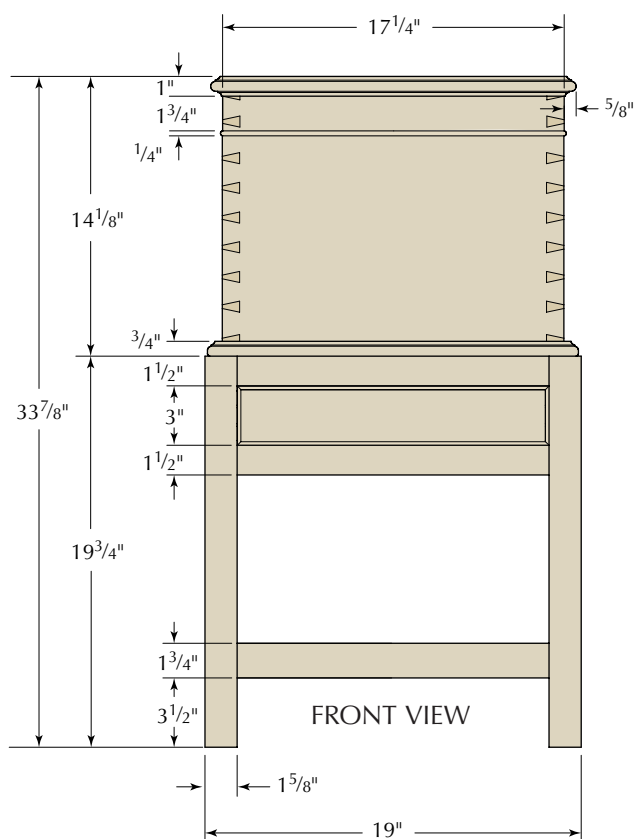

SECTION THROUGH DRAWER

## CUT THE LID FREE



**Separation preparation.** With your underhung moulding fit and attached to the top only, it's easy to properly reposition the lid assembly after the frame is sawn free.

**Spacers are key.** To make the cut to free your frame effortless, your spacers must be cut to the exact thickness created by the saw kerf. Clamps hold the sawn frame, but do not pinch as you make the second set of cuts.



then clean to your line using a spindle sander. Position the jig so that the two adjacent lines are just covered then add a couple clamps to hold everything secure.

Set the router's depth of cut, then rout the quarter-circle. You can see a completed corner on the "Panel Inlay" photos on the previous page. It's better to stay slightly away from your layout lines as shown on the left than it is to touch the line as shown on the right. The extra spacing makes the straight work easier. Complete all four corners.

Remove the bushing and install a fence attachment to cut the straight inlay recesses. Set the depth of cut, then rout your lines between the quarter-circles. If it is necessary to make adjustments for any line, do so. You have a little wiggle room.

Clean up any corner work with a sharp chisel.

### Keep Parts Aligned

The box is cut about 2" from the top edge, at the middle of a dovetail. The sawn-free frame attaches to the top and needs to stay aligned with the balance of the box. To keep the frame in its proper shape, position your box on the upside-down top, then cut and fit the underhung moulding around the box. Pin the moulding to the top panel only.

Mark the box so it's easy to reposition in the correct orientation after the cut is made. Remove the top with the attached mouldings, then set up to saw the frame off your box. I like my table saw for this operation. Raise the blade to just cut through the box parts and set your fence to allow the frame to fall free. Cut the front and back panels, then slip spacers into the slots and add a couple clamps to hold things secure before you cut the end panels.

After your lid frame is freed, position it to the top and underhung moulding. Check the orientation, then attach the moulding with pins. Flip the assembly and drive brads into the frame through the inlay recesses in the top. This holds the frame in position and aligned with the box.

This is a great time to install the bead moulding to the lid assembly. The bead fits into a  $\frac{1}{4}$ "-deep x  $\frac{3}{8}$ "-wide rabbet cut along the front and end edges. For me, this is a router table operation. You can run your moulding at a router table, use a scratch beader or a beading plane – whatever approach you prefer. Because we use the same moulding design to wrap the drawer front, mill plenty of bead stock. Cut the rabbets, then cut and fit the bead moulding to the lid assembly. Miter the front corners. After your moulding is fit, add a thin line of glue, then pin the moulding into the rabbet.



**Tight is right.** A snug fit holds your inlay, but a few strips of blue painter's tape help to secure things in place.

### Top Inlay

After the top assembly is complete you can work on the inlay that covers the nails. The only tricky parts are the quarter-round corners – and they're not that difficult.

Find the final radius of the corners using your compass. You'll need an inside radius as well as an outside radius. Lay out the two radii on a  $\frac{3}{4}$ "-thick piece of inlay stock – I used tiger maple (of course) – then cut close to your layout at a band saw. Clean up and finalize your fit using a spindle sander, then cut thin slices at the band saw. I found a small file helpful to tweak the fit of my corner inlay. The straight inlay is simply cut at a table saw.

Corner pieces are fragile, so handle them carefully as you work. Fit the corner inlay to your top, then mark and



**First bead wrap.** With your bead cut to width, wrap the three-sided moulding around the lid assembly. Take time to get the mitered corners tight.



miter the ends to meet the straight inlay. Miters on the straight pieces are easily adjusted to match the corner miters. I use a sharp chisel to make the cuts. With the pieces cut to fit and ready to install, squeeze a thin bead of glue into your recess then install your inlay; work around the box one piece at a time. After the glue dries, sand or scrape your top smooth.

### Foundation Fabrication

With work on the box section complete, it's time to build your base. Mill the legs to 1<sup>5</sup>/<sub>8</sub>" square x 19<sup>3</sup>/<sub>4</sub>" long, then lay out the rail mortises. The 6" rails fit at the sides and back while the front apron consists of two 1<sup>1</sup>/<sub>2</sub>"-wide rails with a 3" drawer opening sandwiched between. Cut the front rails and your drawer front from a single piece to maintain grain continuity. Also remember to lay out and cut the mortises for the end stretchers that make up the H-stretcher base of the cellarette.

Mill the rails and stretcher parts to thickness, length and width. At your table saw, cut the tenons on all parts except the center stretcher. Set the blade height at 1/4" with your fence set to cut a 1" tenon then make a cut on both faces of



**Flush fit.** The 1/4"-wide x 1"-deep mortises are positioned so the rails fit flush to the outside face of your legs.




**Setup for sliding dovetails.** Sliding dovetail sockets on the base stretchers are easy when you install a 3/4" outside-diameter dovetail bit with a 3/4" outside-diameter guide bushing. Wherever the bushing travels, the bit will cut.

### Southern Cellarette


NO.	ITEM	DIMENSIONS (INCHES)			MATERIAL	COMMENTS
		T	W	L		
BOX PARTS						
❑ 2	Front/back panels	7/8	12 <sup>3</sup> / <sub>4</sub>	17 <sup>1</sup> / <sub>4</sub>	Walnut	
❑ 2	End panels	7/8	12 <sup>3</sup> / <sub>4</sub>	13 <sup>1</sup> / <sub>8</sub>	Walnut	
❑ 1	Box bottom	5/8	13 <sup>1</sup> / <sub>8</sub>	17 <sup>1</sup> / <sub>4</sub>	Pine	
❑ 1	Top	3/4	13 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>2</sub>	Walnut	
❑	Underhung moulding	1/4	1/4	48	Walnut	
❑ 2	Long dividers	1/4	5	15 <sup>3</sup> / <sub>4</sub>	Pine	
❑ 3	Short dividers	1/4	5	11 <sup>5</sup> / <sub>8</sub>	Pine	
❑	Bead	1/4	1/2	84	Maple	Includes drawer bead
BASE PARTS						
❑ 4	Legs	1 <sup>5</sup> / <sub>8</sub>	1 <sup>5</sup> / <sub>8</sub>	19 <sup>3</sup> / <sub>4</sub>	Walnut	
❑ 1	Back rail	3/4	6	17 <sup>3</sup> / <sub>4</sub>	Walnut	1" TBE*
❑ 2	End rails	3/4	6	12 <sup>3</sup> / <sub>4</sub>	Walnut	1" TBE
❑ 2	Front rails	3/4	1 <sup>1</sup> / <sub>2</sub>	17 <sup>3</sup> / <sub>4</sub>	Walnut	1" TBE
❑ 2	End stretchers	7/8	1 <sup>3</sup> / <sub>4</sub>	12 <sup>3</sup> / <sub>4</sub>	Walnut	1" TBE
❑ 1	Center stretcher	7/8	1 <sup>3</sup> / <sub>4</sub>	18 <sup>1</sup> / <sub>4</sub>	Walnut	Dovetail Ends
❑	Waist moulding	3/4	3/4	48	Walnut	
❑ 2	Guides	7/8	1	10 <sup>3</sup> / <sub>4</sub>	Walnut or Pine	
❑ 2	Kickers	1/4	3/4	12 <sup>1</sup> / <sub>2</sub>	Walnut or Pine	
❑ 2	Runners	3/4	1 <sup>1</sup> / <sub>2</sub>	12 <sup>1</sup> / <sub>2</sub>	Walnut or Pine	
❑ 1	Thumb turn	3/8	3/4	2 <sup>1</sup> / <sub>4</sub>	Walnut	Ends taper to <sup>3</sup> / <sub>16</sub> "
❑ 1	Drawer front	13/16	3	15 <sup>3</sup> / <sub>4</sub>	Walnut	
❑ 2	Drawer sides	1/2	3	12	Pine	
❑ 1	Drawer back	1/2	2 <sup>3</sup> / <sub>8</sub>	15 <sup>3</sup> / <sub>4</sub>	Pine	
❑ 1	Drawer bottom	1/2	12	15 <sup>1</sup> / <sub>4</sub>	Pine	Bevel 3 sides
❑ 2	Stops	3/8	2 <sup>1</sup> / <sub>4</sub>	3	Walnut or Pine	

\*TBE = Tenon Both Ends

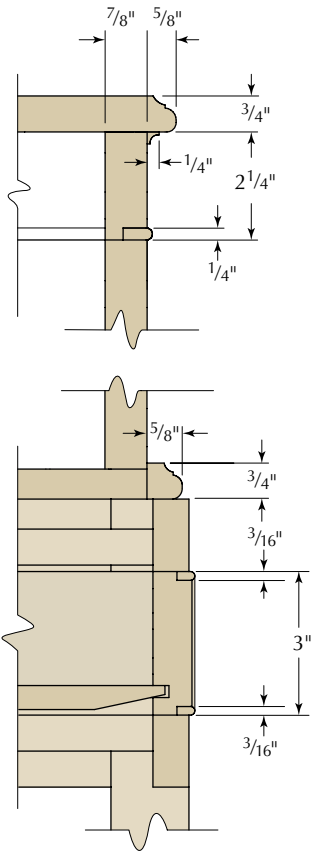

MOULDING & BEAD DETAIL

Use a tenon jig to remove the cheek waste. (Set your cut so the waste falls free from the blade and is not trapped.) Check the tenon-to-mortise fit and make adjustments if necessary. With your setup correct, make the cuts to form the 1/4"-thick tenons. Trim your tenon edges to complete the work.

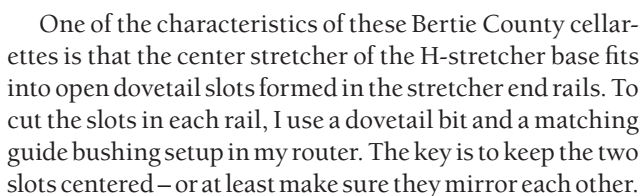

With the work complete, dry-fit your base and get a measurement on the length of the center stretcher. It needs full-width dovetails cut at both ends. Use the same dovetail bit as you did to cut the slots. At a router table, set the correct bit height based off your end-rail slots, then set your fence to cut a sliding dovetail with a snug fit. Glue swells the piece, so make sure you can slip the joint together with hand pressure – no mallet required. Sand the inner faces of your base pieces to remove any errant marks, then glue and assemble your base. Because the center stretcher fits into the dovetail slots, you can slip it in place at the end. Set the assembly aside while the glue dries.

As the base assembly glue-up dries, make the waist moulding that transitions from the base to the box – it also hides the applied box bottom. I used the same profile as was used on the top, but set the top profile a little deeper and used a larger (1/4" roundover bit) profile along the bottom edge.

A person is shown using a steel rule and magnets to align a wooden panel on a workbench. The steel rule is placed against the edge of the panel, and the magnets are used to hold it in place. The person is holding a pencil and marking the panel.

28 ■ POPULAR WOODWORKING MAGAZINE February 2013





**Hold tear-out at bay.** Rabbets cut using a dado stack are less apt to tear-out, but you should still plow the two ends before the sides.

You should leave a small gap at the ends because this box is built to be separated from the base – slip in a steel ruler at one end to act as a spacer. Fit the moulding to the ends and the front of the box, mitering the corners. With the pieces fit, apply a thin bead of glue to the bottom of your moulding then drive a few brads to hold things tight; aim your brads into the base and not into your box.

You may have noticed that there are no mortises on the interior of the base section, nothing to hold the runners or kickers. On this piece the inside parts are simply nailed in place. It's not fancy. It just works. Drawer guides are nailed to the side rails and fill the area between the side rails and the inside leg face. (The guides fit  $\frac{3}{8}$ " under the runners.) The runners and the thin kickers reach from rail to rail and are nailed into the front and rear legs. The runners are held flush with the lower edge of the drawer opening and are leveled from front to back. The kickers are held  $\frac{1}{8}$ " above the upper edge of the drawer opening. Drawer stops are also nailed in place. They are attached to the back rail and are fit and installed after you have built the drawer.

## Period-correct Drawer

The cellarette drawer is built using typical 18th-century construction techniques, with a bead around the perimeter; through-dovetails join the sides to the back, and half-blind dovetails are used in the front-to-sides joinery. Additionally, the drawer bottom – beveled on three edges – slips into  $\frac{1}{4}$ " grooves cut into the drawer sides and front.

Build your drawer, then rabbet for the beadwork. To eliminate tear-out on an area that is prominent, I cut the rabbet using a dado stack. This is less apt to cause problems. Install your dado stack so the cut is  $\frac{3}{8}$ " deep and  $\frac{1}{4}$ " wide – it's better to fit a wider blade under a sacrificial fence as shown in the photo above. Place the drawer front

flat on your saw's table to rabbet all four edges of the drawer.

Cut your bead to width so  $\frac{1}{8}$ " protrudes beyond the drawer front, then fit the pieces around the edge. Miter all corners. A small amount of glue and pins hold the bead in place. After you fit and install the drawer bottom, check the drawer fit then measure, cut and fit your drawer stops. When closed, your drawer front should be flush with the front rails while the bead protrudes.

## Hardware, Latch & Finish

A box lock fits to the front of your box. You can install the lock, but you'll need to install the surface-mounted hinges before you can fit the catch. The box also has pulls set on each side to make carrying it easy. These pulls are installed just as the single pull in the drawer front – each post and nut is countersunk on the inside of the box. Hardware installation is completed with a round escutcheon that covers the keyhole.

Another Bertie County feature found on this cellarette is the thumb-turn latch that locks the box into the base. This thin piece is screwed to the base's back rail. It spins to catch the box. How important is it given you could simply lift the box straight up?

The finish on this cellarette is my standard finish for walnut. Apply a coat of boiled linseed oil, spray two coats of orange shellac, sand with #400-grit sandpaper then add three additional coats of clear shellac so the finish build-up is sufficient. To achieve a dull finish without having to rub out the shellac, I sand again with #400-grit sandpaper, then apply a single coat of dull-rubbed effect, pre-catalyzed lacquer. Other options are to apply a coat of wipe-on satin finish varnish, or add a layer of satin water-based varnish. A coat of paste wax wraps up the finish.

Whether you have bottles of gin to store or you just like the idea of whisking the box away as unexpected guests arrive, a cellarette is a useful piece of furniture, and a fun and challenging project. **PWM**

*Glen is a contributing editor to this magazine and a professional cabinetmaker. See more of his work and read his blog at [woodworkersedge.com](http://woodworkersedge.com).*



**Yes, it's OK.** Today we shudder when hinges are surface mounted, but this is the way cellarette hinges were handled during the period.

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**VIDEO:** See the jig and router setup used to create the sliding dovetail joints.

**BLOG:** Read this post about a simple jig to create dados for the egg-crate dividers.

**PLAN:** Download a free SketchUp model of this piece from our online collection.

**IN OUR STORE:** "Furniture in the Southern Style," a collection of drawings of period pieces from the MESDA collection.

**WEB SITE:** Visit the author's blog.

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)

# Japanese Chisels

BY WILBUR PAN

The hard truth about these ancient tools.

Japanese tools have a reputation of being suitable only for softwoods. This is an unfounded worry, especially in the case of Japanese chisels. As woodworker Kari Hultman (writer of The Village Carpenter blog) attests, “I would like to publicly profess my love of Japanese chisels. All the rest of you chisels can just go home now. I have used the same chisel for chopping and paring maple for days and days and have yet to resharpen it.”

Experience, and knowing what underlies the construction of a Japanese chisel, will empower you to use these chisels in any woodworking task.

## Real-deal Steel

Japanese chisels can take an extremely sharp edge that lasts a long time, due mainly to the treatment and type of steel used for the cutting edge. This tool steel typically has a higher carbon content and relatively few alloying elements compared to Western tool steels. That leads to a higher carbide content in the finished Japanese chisel than in Western chisels.

Today, the most common steels used are “white steel” and “blue steel.” The names come from the color of the paper used to package these steels, which are manufactured by Hitachi. The main difference between the two is that blue steel has alloying agents added that give it added abrasion resistance and a more durable edge. But white steel is easier to sharpen, and also can have a durable edge. This is somewhat like the difference between O1 and A2 steels.

The steel in Japanese chisels is hardened to a higher degree than most

Western chisels. Japanese chisels with a Rockwell hardness of 64 or higher on the “C” scale are not uncommon, whereas Western chisels typically have a Rockwell hardness of 60-62. The added hardness results in the edge being less likely to deform under impact, such as when chopping.

Japanese chisels also undergo a forge-welding process in their manufacture. The repeated hammering in this process causes the carbides that are in the steel to become very small and evenly distributed, which results in an extremely sharp and long-lasting edge.

But as Milton Friedman said, there’s no such thing as a free lunch. Having a very hard steel that can take a very sharp edge comes at a cost, and that is brittleness. If an entire chisel were made of a very hard steel, it’s very likely that the chisel would snap under use. That is one reason why Western chisels aren’t often hardened past a Rockwell hardness of 60-62, be-

cause O1 and A2 steels can also become brittle if they are treated to be very hard.

To get around the brittleness issue, Japanese chisels have a second layer of metal forge-welded to the hard layer of tool steel. Traditionally, this layer was wrought iron. The wrought iron layer is softer and thicker than the hard steel layer, which does two things for a Japanese chisel. First, the soft layer acts as a shock absorber, which protects the chisel from cracking under impact due to brittleness. Second, sharpening a Japanese chisel becomes very easy because the hard steel layer can be made quite thin, so that only a small amount of the hard steel on the bevel side needs to be abraded while sharpening.

**Comparison of Japanese & Western chisels.** Japanese chisels tend to have shorter blades and overall are shorter than their Western counterparts. From left to right: Japanese bench chisel, Western bench chisel, Japanese timber chisel, Japanese mortise chisel, Western mortise chisel, Japanese paring chisel.







**Bevel.** This is the bevel side of a Japanese chisel. The difference can easily be seen between the hard layer of steel that makes up the cutting edge, and the soft layer atop it that provides strength to the body of the blade.



**Back.** The back of a Japanese chisel has a hollow, which aids in flattening the back. Because of the hollow, a relatively small area of hard steel needs to be worked, instead of the entire back as on a Western chisel.

"The expectations of life depend upon diligence; the mechanic that would perfect his work must first sharpen his tools."

—Confucius (551-479 B.C.),  
Chinese philosopher

Because the back of the chisel is made entirely of the hard steel layer, flattening the back would be quite an ordeal. To make this easier, a hollow is ground into the backside of the chisel so that only a small area of the hard layer needs to be flattened.

This begs the question of what happens after multiple sharpenings, when the cutting edge moves into the hollow on the back of the chisel. All that has to be done is to work the backside of the chisel until a flat is reestablished near the cutting edge. The hollow won't disappear, because the hollow is slightly deeper toward the handle end of the chisel (see illustration on page 32).

### Handle Without (Much) Care

The handle of a Japanese chisel is different than on Western chisels. Most Western chisels either have a tang that sticks into the handle, or a socket that receives the bottom end of a handle that is shaped to fit. Japanese chisels have a combination tang-and-socket

construction, where a cone-shaped ferrule slips over the tang and receives the bottom of the handle, while the tang sticks into the handle of the chisel. This combination is nearly bulletproof in its durability. The socket prevents the handle from splitting at the bottom end, while the tang nearly guarantees that the handle won't work loose over time.

In addition, the end of the handle of most Japanese chisels has a hoop around it so that it can be hit with a hammer. The hoop is initially set slightly below the end of the handle, and the small amount of wood that protrudes past the hoop is soaked in water then hammered down to form a mushroom to keep the hoop in place. This allows a Japanese chisel to be hit hard without worry that the handle will split.

Some say that the hoop makes paring with a Japanese chisel uncomfortable. I've found that if the hoop is properly set, the fibers that mushroom over the hoop cover it so that the metal ring should not be digging into your hand.

### Field Guide to Chisels

The most common type of Japanese chisel is the *oire nomi*, which is equivalent to a bench chisel. It's a great all-around chisel, and it can be used for chopping and paring tasks. Some people use these chisels for mortising. There are also Japanese chisels that are equivalent to paring (*usu nomi*) and mortise (*mukōmachi nomi*) chisels.

If the construction of these chisels is examined, they all have features much like their Western counterparts. Japanese paring chisels have longer handles and blades that aid in guiding a straight paring cut, they usually have more acute bevel angles and they should never be hit with a hammer or mallet in use. Japanese mortise chisels are thicker and are set up with a steeper bevel angle compared to bench chisels.

If there is any difference in use between Japanese and Western chisels, it's the relative size of the chisel. Japanese bench and mortise chisels are typically shorter than their Western counterparts. Japanese paring chisels are closer in length to Western paring chisels, but the blade length tends to be shorter. If there is any reason to prefer Western chisels over Japanese chisels, it's probably this. Even so, there is a Japanese

## COMPOSITION OF WESTERN & JAPANESE CHISEL TOOL STEELS

	O1	A2	White Steel #1	White Steel #2	Blue Steel #1	Blue Steel #2
Carbon	0.95	0.95-1.05	1.25-1.35	1.05-1.15	1.25-1.35	1.05-1.15
Manganese	1.2	1	.02-.03	0.2-0.3	0.2-0.3	0.2-0.3
Silicon	0.4	0.3	0.1-0.2	0.1-0.2	0.1-0.2	0.1-0.2
Chromium	0.5	4.75-5.5	-	-	0.3-0.5	0.2-0.5
Tungsten	0.5	-	-	-	1.5-2	1-1.5
Molybdenum	-	0.9-1.4	-	-	-	-
Vanadium	0.2	0.15-0.5	-	-	-	-
Phosphorus	0.03	0.03	0.025	0.025	0.025	0.025
Sulfur	0.03	0.03	0.004	0.004	0.004	0.004

All values in percentages. Japanese tool steels have 10-40 percent more carbon than O1 and A2 tool steels. This leads to increased carbide content in Japanese tool steels, with white steel #1 and blue steel #1 having more carbon than their #2 varieties. Japanese tool steels tend to have fewer alloying agents than Western tool steels. Increased carbide content or added alloying agents makes the steel more wear-resistant.

## WHERE DID 'SOFTWOODS ONLY' START?

Japanese tools have a reputation for being suitable only for softwoods. But if the types of woodworking done in Japan are examined, it's clear that Japanese woodworkers must have been able to work with all kinds of species. Tropical rosewoods and ebonyes were imported into Japan for woodworking, as was done throughout Asia. The most common piece of furniture in the Japanese household is the *tansu* (a storage cabinet with drawers), and it's fairly easy to find examples of *tansu* made with species such as elm, chestnut, ash and mulberry. Yew, although a softwood, is pretty hard to work with, and was used in Japanese furniture. In addition, Japanese white and red oak are uniformly used to make Japanese plane bodies and Japanese chisel handles.

—WP

timber chisel (*atsu nomi*) that is nearly identical to a Japanese bench chisel except that it is longer in length, and is closer to the size of a Western bench chisel (see the opening photo).

### Kissing Cousins

Aside from the size, Japanese chisels are quite different from their Western counterparts primarily because of their laminated construction and the back-side hollow, but historically, there were striking similarities between the two.

Today, Western chisels are uniformly made of a single piece of tool steel, but that is a relatively recent development. According to historical tool expert Stephen Shepherd, up until the 1870s, Western chisels were laminated and made with a forge-welding process

that was similar to that used by Japanese toolmakers. Then, Western chisel manufacturing methods switched to using a single piece of tool steel.

Western toolmakers also took advantage of the concept of a hollow on the backside of the chisel as an aid to efficient flattening of the back.

Joel Moskowitz, of Tools for Working Wood, has written that in traditional Western tool manufacturing, some warping of the iron after hardening was inevitable so that one side of the tool became slightly concave; that side was used for the back. The bevel was then ground on the other side. This results in a chisel with a slight hollow to the back that aids in maintaining the back just like it does in a Japanese chisel, although to a lesser degree.

So it appears that although Japanese chisels are different from today's Western chisels, historically they have some key features in common.

### Softwoods Only?

It's unclear to me exactly why the idea that Japanese chisels were not suitable for hardwoods developed in the first place. Japanese woodworking has a reputation of using mostly softwood species, but there are plenty of examples of Japanese woodworking using hardwoods and tropical species (see "Where Did 'Softwoods Only' Start?"), so the tools must have been able to deal with those types of wood.

In theory, the harder edge of a Japanese chisel might be more prone to chipping, but in practice I've never found this to be an issue. New Japanese chisels


may be a bit prone to chipping due to overhardening of the edge during the manufacturing process, but this issue disappears over time as the chisel is sharpened past that point. And Western chisels are prone to the same issue.

If Japanese chisels are set up with a bevel angle similar to Western chisels (30° for bench chisels, 35° for mortise chisels, 25° for paring chisels), they can be used in hardwoods with great results. I've been able to chop cocobolo with Japanese chisels and then cleanly pare end grain in pine. Experiences like Kari's while she was building her bench are also common. And if you do run into a piece of wood that causes chipping in a Japanese chisel, simply resharpening the chisel with a slightly higher bevel angle will take care of that, just as it will in a Western chisel.

So why did this softwoods-only stereotype come about? I think part of the answer lies in the fact that furniture did not play as central a role in a Japanese house as compared to a Western house. Also, Japanese architecture favored exposed beams that were usually made from softwood species. Because the most visible aspect of Japanese woodworking was in architecture, the association between Japanese tools and softwoods might have come from there.

But to then say that Japanese tools are only good for softwoods makes as much sense as to say that American woodworking is all about softwoods because there's a lot of pine furniture in the United States, or because our 2x4s aren't made from cherry. **PWM**

*Wilbur lives in New Jersey and writes about woodworking on his blog at [giantCypress.net](http://giantCypress.net).*

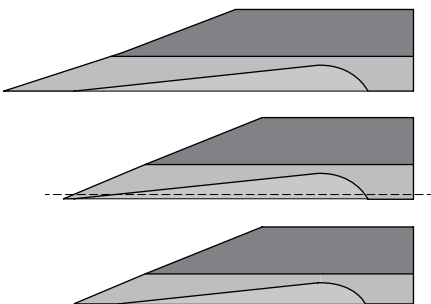

**Dealing with hollows.** This side view of a Japanese chisel shows the soft layer, hard layer and the hollow (top). As a Japanese chisel gets sharpened, eventually the cutting edge will move into the hollow (middle). The way to deal with this is to work the back of the chisel on your sharpening medium, which will reestablish the flat area in back of the cutting edge (bottom). Because the hollow is deeper at the back of the blade, the hollow will last over the life of the chisel.

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**BLOG:** Visit Wilbur Pan's blog for more on Japanese tools and woodworking.

**IN OUR STORE:** "Japanese Saws vs. Western Saws," an article by Christopher Schwarz.

**TO BUY:** "Japanese Hand Tools & Joinery," a DVD by Jay Van Arsdale.

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)



# Shell, Stone & Metal

## I N L A Y

BY MARCO CECALA

Learn a straightforward approach to creating stunning details.

I come to the field of woodworking with an unfair advantage. I grew up in a family jewelry business and did a lot of detail work from an early age. So it's no surprise that when I started making furniture I was drawn to the detailed work of marquetry and inlay. Even a simple inlay can make an otherwise plain piece of furniture more appealing. It can also serve as the perfect final touch on a near-masterpiece.

Using a combination of materials – from wood to more exotic materials such as shell, stone and metal – endless effects can be obtained. The work can be done with tools found in most shops and the results are beautiful.

I'll guide you through the straightforward process of installing a shell inlay. I'll break down the steps required to achieve great results, even if you've never tried your hand at inlay before.



**Inlays dress it up.** Shown here (clockwise), a gold mother-of-pearl escutcheon on a jewelry box, a pair of flower inlays – one in abalone and reconstituted stone, the other in mother-of-pearl, brass and reconstituted stone – and a smoothing plane with white, pink and gold mother-of-pearl and brass inlays.

For the most part, metal and stone are applied using the same methods; I'll explain the few differences as we go. You will be surprised by how much effect you get with the addition of inlay to your projects.

## Design Made Easy

There is no need to be a great artist to produce pleasing inlays. Books and web resources will give you plenty of design ideas. While you are learning you should choose a design with crisp lines and pieces that are not too small; simple is better.

The inlay should also be sized to fit the scale of the piece. If it is placed high or low on a larger piece, it can be positioned in order to be more easily seen. Start by drawing your design on tracing paper. Make a copy and trace it one or two more times to refine the design.

As you will learn, there are several opportunities throughout the process to improve the look of an inlay or save a piece that chips or breaks. Until the cavity is routed in the wood, the design of the inlay can be changed.

## Pattern

Once you're happy with the design, make at least four copies of it. Cut the individual pieces outside the lines so you can see the entire piece. I cut on a self-healing cutting mat available at fabric stores. To attach the pieces of paper to shell or stone, use medium-viscosity cyanoacrylate (CA) glue. For metals, use epoxy. The heat from sawing will loosen the paper from metal if you use CA glue. For more on glues, see "Choosing Adhesives for Inlay Work" on page 35.

There is no need to try to plan a design around material. When you have

finished the drawing, suspend your notion of what things should look like and survey the available materials.

To visualize how shell patterns will look after cutting, you can take a copy of the pattern and cut out a window of the finished piece in the design and move it around on the material. This can help you decide which section of a piece of patterned material to use.

## Choose Your Materials

As long as you can shape, flatten and polish it, you can make any material part of an inlay design. Wood is the easiest to work with, and it can be combined with other materials or used alone.

The most popular inlay material is shell. The wide range of types and colors of shell allow the artist to use it for an entire design.

The art of inlaying stone, called *pietra dure*, it is both difficult and time-

## START WITH THE DESIGN




**Make multiples.** Whether your own or a borrowed design, having multiple copies makes it easier to cut out the smaller inlay sections.



**Take inventory.** Arrange the pieces loosely to verify that you have them all and that they appear as you envisioned.



**Cut a window.** Cut right on the line to create a viewing window. Then lay the window over the shell and adjust the position to your liking. Here, choosing the right section of stone creates an instant vein for the leaf.

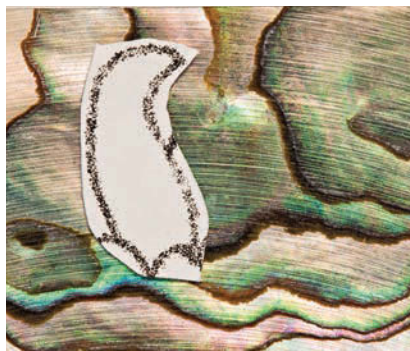

**Glue it down.** Take the actual pattern removed from the design (shown above) and attach it to the shell using CA glue.



**Posture is everything.** Cut out the stone using a fretsaw held at about shoulder height. Use a light grip and work to keep the blade vertical. While most patterns are forgiving, aim for splitting the line as you cut.



consuming. I find it much easier to use reconstituted stone, and many types are available.

Metals can be used for inlay as well. Gold and silver work, but for furniture there are less expensive alternatives. Brass and aluminum polish well.

The average thickness for inlay material is  $\frac{1}{16}$ " (0.0625"). Shell and reconstituted stone suppliers sell this and other thicknesses. Just be sure you are ordering the correct material. To learn more, see "Materials & Pre-cut Inlays" on page 38.

### Cut Out the Inlay

The two special tools you need to cut inlay materials are a bird's mouth and a jeweler's fretsaw. The bird's mouth is a simple V-notch cut into a piece of  $\frac{1}{2}$ "-thick Baltic birch plywood.

The saw frame should be solid. As small as a 3" throat will work, but I use a saw with a 5" throat because it allows me to cut larger pieces. Jeweler's supply houses will help with the saw frame and blades. Get #3/0 blades for fine cutting and #2 for rough cutting larger blanks.

When cutting shell, it's important to remove the dust as you cut it. One of the three layers in the material is calcium carbonate, which produces a highly abrasive dust that can cause lung damage. I attach a hose from my vacuum to the top of the bird's mouth; a piece of fabric screen prevents small pieces from being lost. You need to see well, so use a headband magnifier and a lot of light. Light the work from multiple angles to avoid blade shadows, which can look like pencil lines.

Cutting is the hardest part to learn in doing inlay work. The blades are small and the material is tough. Be aware of your grip on the saw; keep it light and pay attention to staying vertical. As the saw comes down to engage the teeth, don't put too much forward pressure on the blade. When going around a curve, use very little turning force and keep the blade moving up and down. The most common reasons for a broken blade are pushing too hard and trying to turn corners too quickly.

Position the bird's mouth at chest

## CHOOSING ADHESIVES FOR INLAY WORK

For most inlay work, use cyanoacrylate (CA) glue. You will want low- and medium-viscosity glue to use for various tasks. Make sure the glue is high quality, fresh and kept in a cool place. I have not found a need for spray accelerator when the glue is fresh. Woodworking and jewelry suppliers have good quality products available.

Medium-viscosity CA glue is good for gluing the paper patterns to shell blanks (low-viscosity glue soaks through the paper and makes it look gray, and makes the line you are trying to follow appear lighter). It is also good for assembling inlay on a waxed paper barrier. The thicker consistency allows you to guide the glue to as much of a seam as needed.

Unfortunately, CA glue isn't a good choice for working with metals because metal heats up and causes the CA glue and paper patterns to delaminate. Epoxy, which has better heat resistance, is best for metal inlay work. Epoxy also works well when a cavity is routed too deep and needs to be filled. I use Epoxy 330 available from Rio Grande. It is fast-setting, water clear and high quality. — MC



**Use epoxy for metal inlays.** Once the pattern is set in place, use a razor blade to squeeze out the epoxy underneath and keep the pattern flat.

level. Keep the saw vertical and let the tool do the work. If you split the pencil line with the saw blade, the fit will be correct, eliminating the need to file the pieces. This takes practice. Don't worry; a bit of filing will correct any wayward cutting.

Straight lines are harder than you might think. Look ahead of the blade to where you are cutting, not behind it. To follow a curve, you can turn the saw for sweeping curves. For tight curves, turn the piece as well as the saw. And don't be surprised: Blades break often and are usually only good for three or four small shell pieces. You'll go through a lot of them while learning.

To create a sharp point (which will require reversing the cut direction), saw beyond the point then use the sawblade as a file, keeping it in one location as you "file" a small circle (the diameter should be the same as the width of the blade with which you're cutting). The blade can be turned around and back to the

pencil line for the cut beyond the point.

Make sure the workpiece is supported throughout the cutting process. Back up the blade to the edge of the small V closest to you and make the cut. The work will be supported by your finger and both sides of the kerf will be more secure. If a fine tip of your inlay piece breaks off, don't throw it away. Try fitting it to its mate; chances are that a bit of filing can make a new point that works just fine. CA glue can also be used to reattach the broken piece. Finish the cut on the broken part and glue it together from the backside on a piece of waxed paper.

### Cleanup & Assembly

It is good to get into the habit of completing each operation fully before moving on to the next step. Starting out, make designs with just a few pieces; it will keep your frustration level down.

To assemble the pieces, tape a piece of waxed paper to a flat surface over


## ASSEMBLE & SCRIBE THE INLAY



**Build the inlay.** With pieces cut and filed, it doesn't matter if they follow the lines exactly as long as they look good together.



**Glue it together.** Once you're satisfied with the appearance and fit of the pieces, glue them together over a piece of waxed paper.

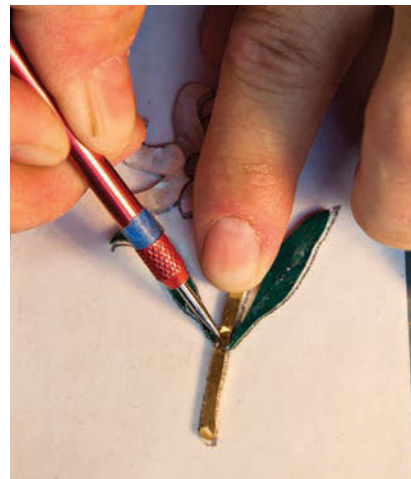

**Shoot the seams.** Use a pin to chase glue down the seam where mating parts come together.

"The true secret of happiness lies in taking a genuine interest in all the details of daily life."

—William Morris (1834-1896),  
craftsman, designer

## SUPPLIES

**Stewart-MacDonald**  
[stewmac.com](http://stewmac.com) or 800-848-2273

- Precision Router Base (works with a Dremel or other carving tool)  
#5260, \$53.65

**William Ng**  
[wnwoodworkingschool.com](http://wnwoodworkingschool.com)

- router base for Foredom Flex Shaft, \$135
- set of 3 bits (1/32", 1/16", 1/8") (\$35.95)

**DePaule Supply**  
[luthiersupply.com](http://luthiersupply.com) or 541-603-5049

- wide variety of shell blanks and pre-made inlays

**Rescue Pearl**  
[rescuepearl.com](http://rescuepearl.com) or 530-676-2270

- shell blanks, pre-cut designs and a wide array of reconstituted stone

**Rio Grande**  
[riogrande.com](http://riogrande.com) or 800-545-6566

- Epoxy 330  
#206044, \$17.75
- graver handles and sets of needle files

*Prices correct at time of publication.*

a copy of the design. Line up the cut pieces with the design lines. Here is yet another chance to modify the design for fit and appearance. During filing and fitting, don't be concerned if the pieces don't match the lines exactly; as long as they fit together and look good they'll work fine.

Leave the paper with the design on the material during initial filing – though you may want to remove it to verify a seam. To remove the paper, slide a single-edged razor blade between the paper and material and push the blade to separate the two.

File the pieces that do not fit together well or are not square. As each piece is fitted, it can be glued in place by applying CA glue along the seams, as shown above. When working with materials of different thicknesses, just turn the piece over so the finished side of the inlay is flush.

### Prep the Background Material

The best material to receive inlay is a tight-grained dark wood. Ebony guitar fingerboards are a good example – they are often inlaid for exactly this reason. Walnut and mahogany also work well as a background material; their grain and color are suitable to the task.

To prepare the wood, handplane the surface with a smoother then seal the wood by padding on shellac (two-

pound cut). The color of the shellac does not matter because it will be removed later. You just want to make sure you end up with a light coat of finish on the piece. Spray shellac or lacquer can also be used – just make sure the surface is smooth and without any orange peel. If you are using an open-grained wood, do your grain filling first to make the wood smooth. Then pad on the shellac as described above. The pieces I am working on here are not completely sized and shaped as they will be before they become part of a furniture piece. Even with drawer fronts, it is possible to inlay before dovetailing. Remember that any stock removal on the inlay surface needs to be done with sandpaper, not a handplane. After gluing and smoothing the inlay, the rest of the wood can be worked without fear of damaging your work.

### Scribe Around the Inlay

Once the piece is assembled it can be scribed to the background. Clean up excess glue on the edges of the inlay with a small knife. In the example inlay shown, the stem and leaves break apart easily. Don't be concerned if they come apart. Mark where they join and place them on the background wood separately.

Attach the inlay to the surface of the wood using small dots of a fast-drying





**Mark it out.** Align the inlay on the workpiece and glue it down using Duco Cement. Then scribe around the outside of the pattern.



**Chalk it up.** Remove the inlay and sprinkle chalk dust across the scribed guidelines. Using chalk of a contrasting color makes it easy to spot your lines.

adhesive such as Duco Cement. CA glue will bond too well and pieces may break when it comes time to release them from the background. After the glue has had time to set, remove any squeeze-out by cutting with a small knife and scraping with a toothpick sharpened to a chisel tip.

Scribing can be done by one of two methods: knife or point. You are cutting through the thin layer of shellac and then into the wood fibers. The shellac prevents your cut from following the grain. For scribing, the sharpened shank of a  $\frac{1}{16}$ " drill bit works well. When using a knife, X-Acto No. 11 blades work best.

A scribe is easier to use because it is difficult to navigate a knife around a tight curve. With a scribe you'll use the same movement used to trace the inlay. No matter what method you use, the process is the same. Make several light passes. You want to end up with a crisp line, but it does not need to be very deep.

Remove the inlay by placing a single-edged razor blade flat to the background and sliding it against the dots of glue. Check for any areas that did not get scored well. Place the inlay over them, hold them down with a finger and scribe them again.

Take a piece of colored chalk that contrasts well with the wood you are

using – the brighter the better. Using a knife, scrape chalk dust on the surface and rub it into the scored lines to define the pattern. Verify that all areas have been scribed and filled with chalk before you cut the cavities to house the inlay.

### Rout the Cavity

Make sure you have good light and a way to keep the wood chips away from


your work. A plastic hose directing compressed air works well. The stream of air blowing the chips away makes your work quicker and more accurate.

Removing the wood for the cavity is a three-step process. First, hog out large areas with a  $\frac{1}{8}$ " bit. Set the depth of the router for the thickest material being used. Glue will fill the voids and secure thinner pieces in place. Stay about  $\frac{1}{32}$ " away from the chalk line

## CUT OUT THE CAVITY



**Choose your tools.** To cut the cavity for the inlay, use a succession of tools. At bottom is a  $\frac{1}{8}$ " bit used to clear the field. At top left is a  $\frac{1}{16}$ " bit that can get into tighter spots. Finish off with small chisels and knives (top, right). Cut right up to the scribe lines and keep the recess a consistent depth.

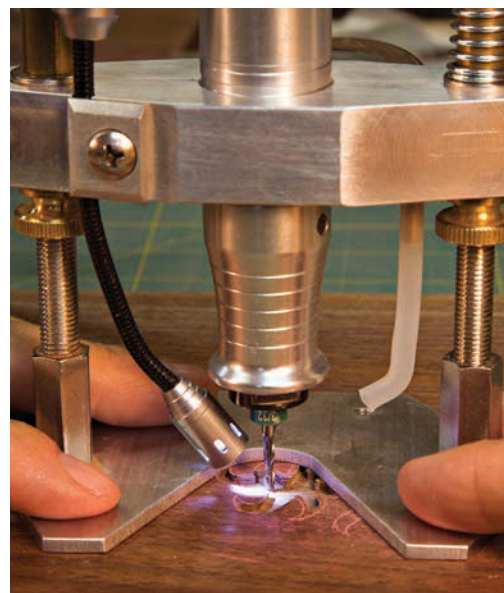

**Rout out the waste.** A trim router, Dremel or carving tool attached to a plunge base routs out the bulk of the waste in the cavity.



## MATERIALS & PRE-CUT INLAYS

**D**ePaule Supply has shell blanks as well as an extensive selection of pre-cut inlays. Don't think using pre-made shapes is cheating. They look great and save a lot of time. The inlays are made for stringed instruments and adapt well to other projects. A fret inlay kit has various sizes of the same pattern to fit your needs. Pre-cut shapes such as strips, leaves and dots are great accents.

Rescue Pearl has a great selection of shell blanks and pre-cut designs. They are also the go-to supplier for reconstituted stone, which cuts and polishes easily. A wide array of colors and patterns are available. — MC



**Exotic & unique.** Cultured stone blanks like those shown here are available in patterns and colors that wood simply can't replicate. They're also perfect materials for inlay work.



**Off the shelf.** Pre-made inlays are available from a variety of sources. Shown here are fret board inlays for a guitar, which is why they progress in size.

## A FEW SPECIALTY TOOLS

**I**f you do a lot of inlay work, a flex-shaft rotary tool with a foot-pedal speed control (like those used in jewelry making and power carving) is indispensable. The advantage of using a flex-shaft hand piece instead of a traditional router is that the hand piece is smaller and easier to control, and the bits are available down to 1/32". For inlay work, bases are available to turn the Foredom flex-shaft hand piece into a router. Stewart MacDonald has bases for Foredom hand pieces as well as a traditional Dremel. William Ng Woodworking has a base I really like; it comes with a light and air fitting to keep the work area free of debris. Both of these suppliers also have bits for routing the cavity.

In order to make filing easier, glue a graver handle to a high-quality barrette needle file. A #2 cut will work well. Also get a set of needle files of various shapes. You will use the half-round, rattail and triangle the most. I like half-head graver handles. They are flat on one side so they won't roll off the bench. Rio Grande is also a good source for saw frames and blades. — MC



**A souped-up file.** To make needle files easier to control and more comfortable to use, attach them to graver handles (used for engraving metal).



**A familiar approach.** A trim router outfitted with a 1/16" straight bit does a fine job creating recesses for inlay work.



**A better base.** This small base (available from William Ng) fits a Dremel tool or Foredom flex-shaft kit and works well for inlay work.



and clear out all of the large areas you can safely reach.

Then change to a 1/16" bit and rout to the chalk lines. As you get close you will see the chalk in the scribe line turning to dust. That's the indicator that you have gone far enough. At this point, all that is left are the areas where the small bit could not go.

Finally, use any tool you feel comfortable with to get the last bit of wood removed. I have good luck with palm chisels and a No. 11 X-Acto blade. Pay attention to these areas. They need to be full depth with enough room for the small parts to drop in without force. If you have to push the piece in the wood you risk breaking part of the inlay.

The inlay should fit in place easily as you will be removing it several times during the fitting process. A piece of non-waxed dental floss can be placed under a piece during fitting. Just wrap the floss around a couple fingers and gently lift the piece straight up.

## Gluings & Finishing

Once the inlay fits smoothly in the cavity, it's time to glue it in place. Make sure the top of the inlay is flat before you proceed. Fill the cavity with low viscosity CA glue and place the inlay. (If the cavity has been routed too deep, fill the cavity with epoxy instead, which will span the gap, and then place the inlay.) Put a piece of waxed paper on top of the inlay. Attach a flat clamping block with a spring clamp and turn the whole assembly upside down. This allows the inlay to sit flush with the surface and reduces clean up.

Give the glue 24 hours to dry. When the glue tests hard with pressure from a fingernail, it's ready.

To flatten the surface, use #80-grit sandpaper attached to a hard, flat block (MDF is a good choice) using spray adhesive. If the block flexes, it will round the varying hardness of material instead of truly flattening it. Make sure all the flattening is done with #80-grit sandpaper. There will be sanding scratches on all the wood and inlay material. Continue sanding through the grits to #320. If metal was used, pad the surface with shellac to stop

## THE FINAL TOUCHES



**Attach the inlay.** Put CA glue in the recess, set the inlay in place and fill in any areas that still have gaps with more CA glue.



**Sand it flush.** Attach #80-grit sandpaper to a flat block and level the inlay until it is flush with the wood.

oxidation. Then finish it with the rest of the piece after final shaping. Once you get the hang of the process, you'll find yourself looking for new materials. Remember, if you can shape, flatten and polish it, you can use it in your next inlay project. **PWM**

*Marco Cecala is a civil engineer and professional woodworker in Peoria, Ariz. He can be reached at [marco@marcowoodworking.com](mailto:marco@marcowoodworking.com). His wife, who took the photos seen here, is photographer Rebecca Wilks. More examples of her work can be seen at [skylineimages.net](http://skylineimages.net).*



**Inspect your work.** Once the inlay is installed, make sure that all the voids are filled with CA glue and don't worry if there is a little extra above the surface.



**Finish it off.** With the inlaid area sanded to #320 and ready for finish, striations are visible on the stem. Those disappear with finishing.

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)


**VIDEO:** Watch a free video presentation from Marco Cecala on making and installing shell inlay.

**TO BUY:** Paul Schürch's DVD "Creating Veneer, Marquetry & Inlay."

**IN OUR STORE:** Glen Huey's DVD "Line & Berry String Inlay by Router."

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)

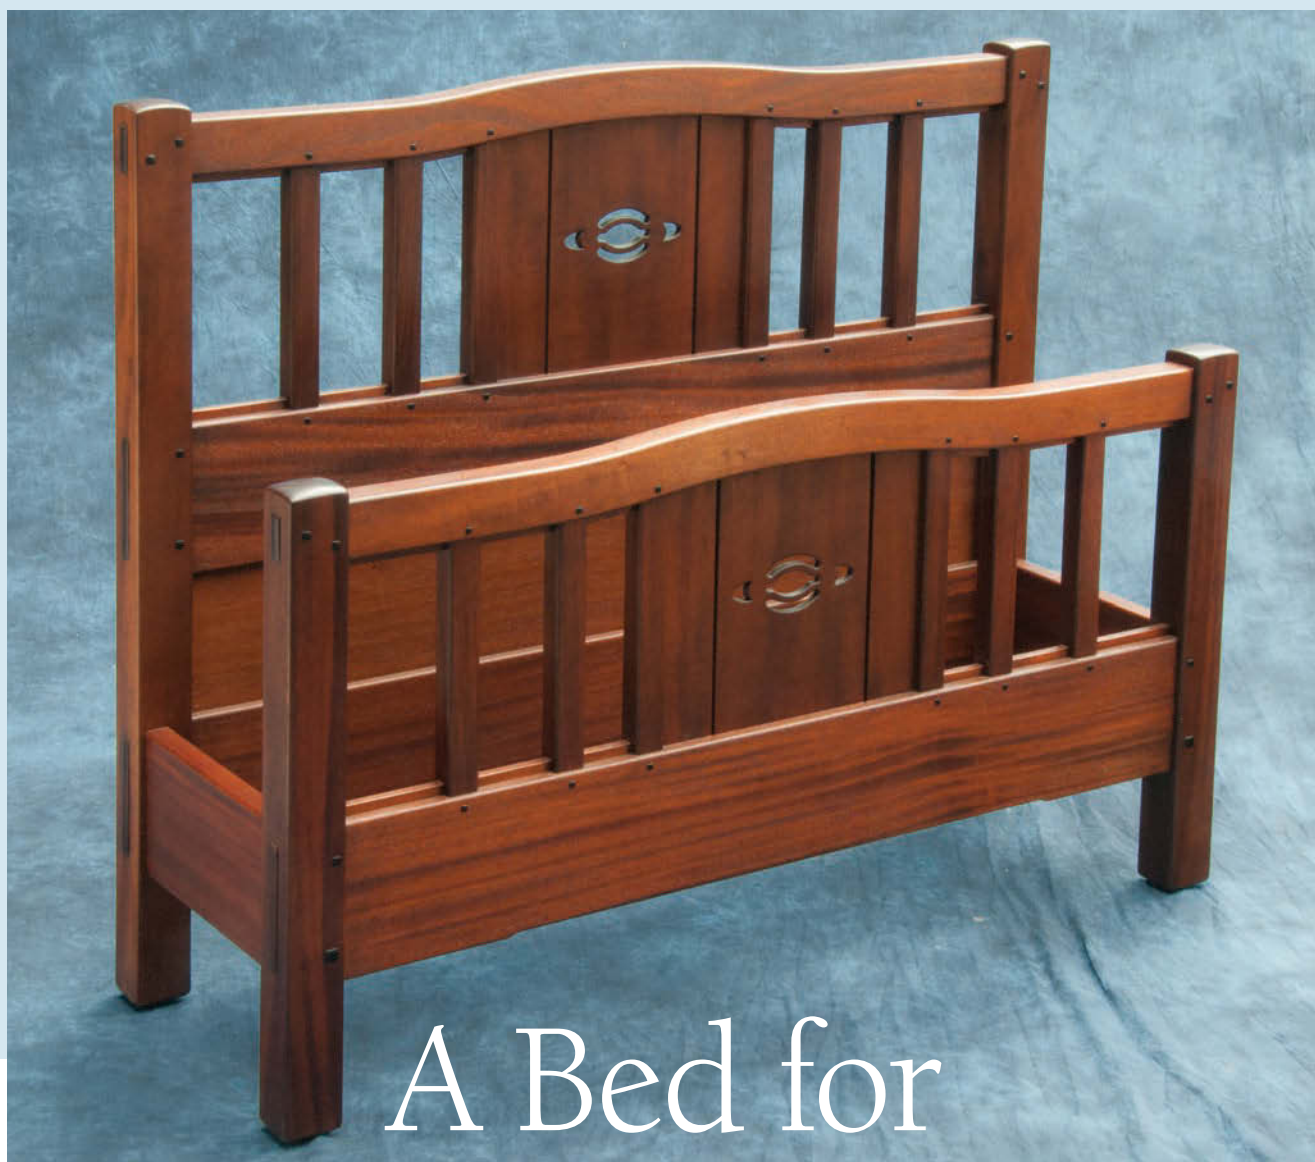

# A Bed for The Thorsen House

BY DARRELL PEART

Make a Greene & Greene-style bed  
with simplified construction.

**R**ecently I joined a group whose primary goal is to restore the Thorsen House, one of the “Ultimate Bungalows” designed by Charles and Henry Greene. In fact, I am on the board of directors of the Friends of the Thorsen House. Our purpose is to raise funds for a seismic retrofit to the house (it sits atop the Hayward fault), but there are several smaller projects going on, too.

The original furniture resides in the Huntington Museum in San Marino, Calif. One of our goals is to eventually reproduce all the original furniture and populate the house with related pieces. The Greenes never designed a bed for the house. Because it is a fraternity house (and has been for nearly 70 years) there are a lot of beds in the house now, but none in the Greene &

Greene style. So I volunteered to design and build a twin XL bed.

While this was a tremendous thrill and honor, it was also intimidating. I never would have dreamed that I would design and build a piece of furniture for one of Greene & Greene’s Ultimate Bungalows.

I decided to use khaya (an African mahogany) to fit in with the house and



existing furniture. And I kept things simple enough for the fraternity brothers to replicate – so they could in turn furnish the other bedrooms.

The Thorsen furniture is, for the most part, more restrained than designs from the other Ultimate Bungalows. This does not mean the designs are unsophisticated – they have more than their share of complexity and subtle finessing. I attempted to keep my design outwardly simple yet throw in a bit of finessing as well.

There was no original bedroom furniture for the house, so I based my design in part on the Thorsen House plant stand (available in the book “Shop Drawings for Greene & Greene Furniture”). I started by borrowing the stand’s scroll pattern to use as a cut out in the center panel. Using a common centerline I radiated the pattern’s arches outwardly to telegraph to the upper rail. I also spaced the spindles to radiate out from the center. I set the height of this first bed so the mattress would be level in height to the original plant stand. This is lower than the standard height of a bed. You might add 3" or 4" to the length of the legs to bring it to typical height (and the plans can be modified to fit any size mattress).

## Mortises First

Let’s jump right in and get to the joinery. First, mill all the parts for the bed to the sizes indicated on the cutlist (page 45), but leave the tongues (the pieces between the spindles and the rails) and center panel pieces about  $\frac{1}{16}$ " oversized in thickness. Be sure to mill extra scrap parts on which to test joinery. I’ll share my method for mortise-and-tenon joints; if, however, you have a preferred approach, go ahead and use it.

To start, construct the two mortising templates shown at top right. Templates such as these are quick and easy to make. They are not meant for long-term use though; I usually make them from scrap material and throw them away when I am done.

All the tenons are  $\frac{3}{4}$ " thick, with the top rail tenon at  $1\frac{1}{2}$ " wide and the



**Mortises on demand.** These jigs, combined with router guide bushings, ensure consistent-sized mortises in multiple locations.



**Under control.** The spacer locates the template the identical distance from the end of each leg.

mid and lower rail tenons at 4" wide. To make the corresponding  $\frac{3}{4}$ " mortise, use a router with a  $\frac{5}{8}$ "-diameter guide bushing and  $\frac{1}{2}$ "-diameter upcut spiral bit. Doing the math then, the opening in the template guide needs to be  $\frac{1}{8}$ " larger in both directions. I like to extend the platform of the template out 2" for sufficient router base support. With all that in mind, cut four pieces of  $\frac{3}{4}$ " material to exactly  $\frac{7}{8}$ " wide x 2" long. Next cut two pieces of the same material to exactly 2" x  $8\frac{1}{8}$ " long, then two more pieces again 2" wide but this time only  $5\frac{5}{8}$ " long.

Assemble and glue the two template platforms. As you can see above, the 2"-long pieces all line up with the ends of the longer 2" wide pieces to form the routing slot in the space between. If everything goes as planned you should have an opening in the smaller template of  $\frac{7}{8}$ " x  $1\frac{5}{8}$ " and an opening of  $\frac{7}{8}$ " x  $4\frac{1}{8}$ " for the larger mortise.

To finish them off, attach the templates to a registration block (with screws only) that is exactly  $1\frac{1}{2}$ " thick and flush against one long edge. This should position the mortise dead center in the thickness of the leg.

Set up a plunge router with a  $\frac{1}{2}$ " spiral upcut bit and a  $\frac{5}{8}$ " guide bushing to a cutting depth of 1" (factor in the thickness of the template). Routers plates do not necessarily center guide bushings on the bit. They can actually be off by quite a bit. For the sake of accuracy, using a guide bushing with a matched precision line-up pin can be helpful.

In a bench vise, using scrap leg material, clamp the stock against the

registration block and rout a test cut. Adjust the position of the registration block to center the mortise on the leg. Centering is important, so be precise here.

Referring to the “Leg Elevations” drawing (page 43), lay out the lines that represent the top and the bottom edge of each mortise (make sure to mark on the  $1\frac{7}{8}$ " face). Center the opening of the template on the layout lines, clamp and rout. For consistency, make a spacer to locate the mortises in the same positions on the legs. Once all the mortises are routed, square the corners with a chisel.

For the tenons, set up a dado stack in the table saw. Using a sled equipped with a large stop-block, set up and cut the cheeks and shoulders of the face side on test material. Make sure to back up the cut with scrap material to avoid blow out. Once a good fit with the mortises is achieved, go ahead and make the face side cuts in all the rails.



**Smart setup.** The vertical block attached to the sled allows the tenons to be machined vertically without adjusting the blade height.

Leaving the blade the same height and referring to the drawings, re-adjust the stop-block and make the cuts to produce the width of the tenon.

## Templates for Curves


When making pattern templates, I draw them in CAD then use the drawings to

have them cut out on a CNC machine. Because a CNC is not a common workshop tool, I will go through it the old-fashioned way: the way I did it back in the B.C. (before computers) era.

The arcs, both on the bottom and the top of the rail, share the same centerline as do the arcs on the top half of

the scroll pattern. To produce the arcs, make two separate templates (top of rail and bottom of rail). Each outline contains an uplifted center arc as well as smaller arcs on either side that are tangent to both the center arc and the straight line that extends out to the legs.

First, cut out the template material

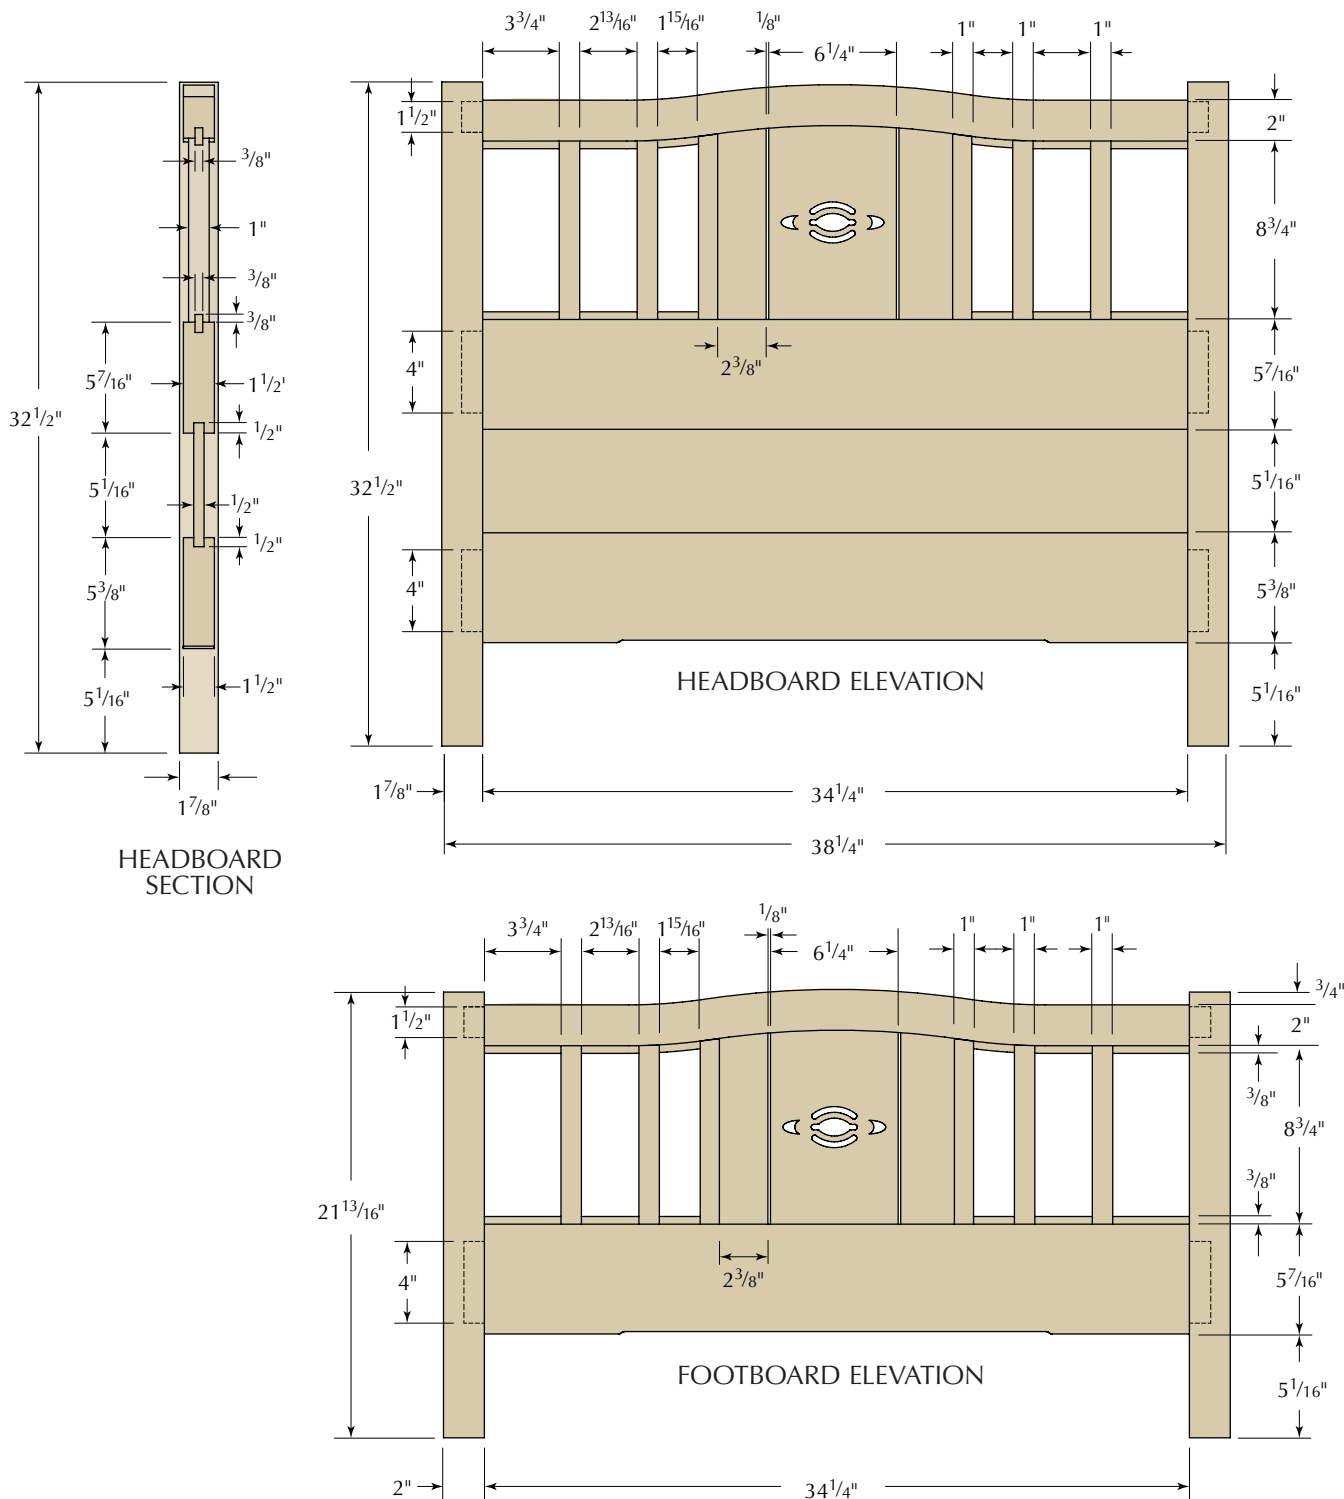




to about 14" x 40" on either 1/2"- or 3/4"-thick ply. Both top and bottom outlines will be laid out on this one piece. Referring to the "Rail Pattern" drawing at right, plot out the beginning and end points for each arc – the points where each arc connects tangentially with the adjoining arc or line.

Next set up trammel points with a pencil and adjust them to the radius of one of the arcs. Strike arcs from the end points of the selected radius. Where the arcs intersect is then the centerline for that arc. Go ahead and use the trammel points to draw the start and stop points of the arc. Repeat this process for all the arcs. Last, draw in the straight lines that extend out to the legs.

Start with the lower outline. The first step (while the opposing edge is still straight) is to cut the straight lines in the lower outline using the table saw, then use a spindle sander or drum end of an edge sander to shape the radii. Next, flush-trim the straight lines in the upper outline with a router and straightedge. Finish off the outline with a sanding block to blend any discrepancies.

To rout the lower outline on the rail, set up the template with blocks and

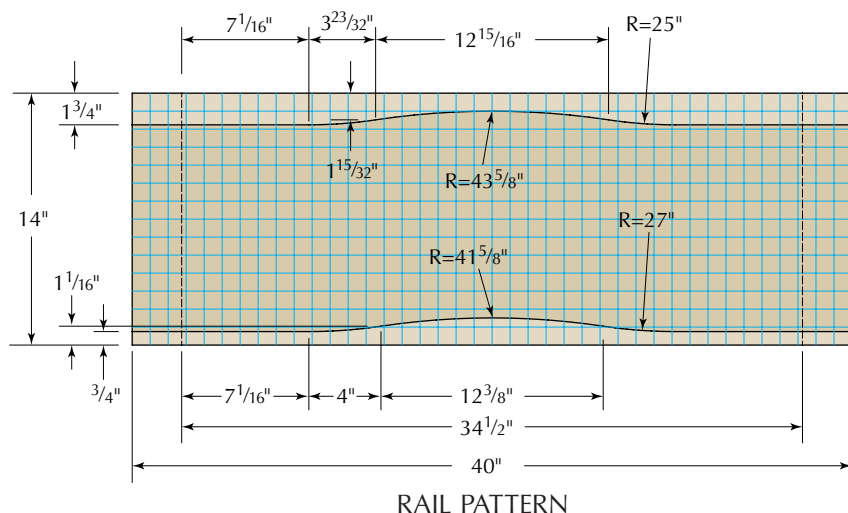



toggle clamps. Make sure to correctly orient the tenons and line up the stock flush with the straight part of the template and at the end with the shoulder line. Mark the outline and band saw the waste, leaving 1/16"-1/8" of material. Using a flush-trim top-bearing bit, clamp the stock in place and rout the outline.

To rout the top outline, start by drawing a line exactly 2" back from the

just-routed lower face. Line up the mark with the edge of the template and the shoulder as before. Pencil in the outline and again cut away the waste. Reposition the toggle clamps and secure the stock, then flush trim to the outline.

### Lifts, Faux Tenons & Plugs

The bottom rails of both the head and foot boards feature a small cloudlift. To

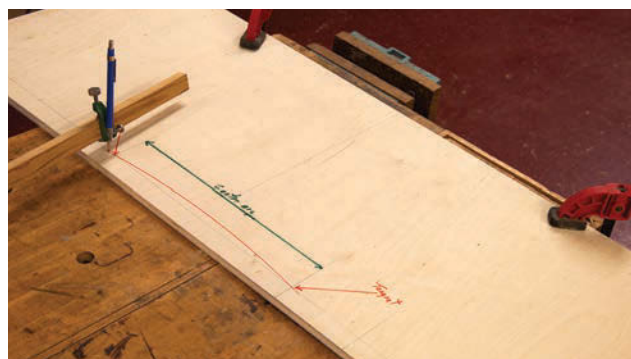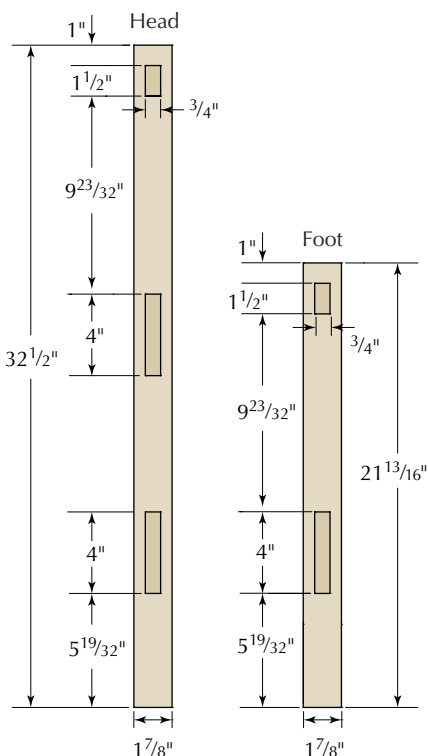

**Jig generation.** A plywood pattern allows the curved rails to be trimmed safely to consistent shape and size.



**Ramp up.** Extra length at the beginning and end of the curved pattern guarantees a good cut with the router.



**Ramp down.** The extra width of the pattern provides room for placing clamps and keeps your hands a safe distance from the bit.

## SHAPE THE CLOUDLIFT



**Need a lift?** The offset in the router table fences forms the straight edge and inside curve of the cloudlift shape.



**True to form.** Shape the lower edge of the bottom rails using the form as a guide. Then flip the form so both ends match.


make the template, start by cutting a piece of  $\frac{1}{2}$ "-thick ply material to  $5\frac{7}{16}$ " (the exact width of the rail) x about 20". Next, set up a router table with a  $\frac{1}{2}$ " straight cutting bit ( $\frac{1}{4}$ " radius). Align the outfeed fence with the top dead center of the bit and drop the infeed side back exactly  $\frac{1}{8}$ ". Mark a stop line  $6\frac{1}{16}$ " from the end of the ply. Run the template material past the bit and stop at the line. This forms the first half of the cloudlift shape. To finish the shape, use a spindle sander to carefully form the connecting radius.

Next, clamp the template even with the rail (on three sides) and flush-trim the shape. Flip the template end for

end then rout the other half of the rail.

Although the working tenons are  $\frac{3}{4}$ " wide, for the purpose of aesthetics, the faux tenons are only  $\frac{1}{2}$ " wide. Referring to the previous layouts for mortises, transfer the marks to the opposing  $1\frac{7}{8}$ " face. Rout as before using the same  $\frac{5}{8}$ " collar and template, but this time use a  $\frac{1}{4}$ " upcut-spiral bit set to a depth of about  $\frac{5}{8}$ ". This will produce a  $\frac{1}{2}$ "-wide mortise for the faux tenons. Finish off by squaring up the corners.

From the drawing below, mark out the centerlines for the ebony plug holes. Using a square hole punch or a hollow chisel from a mortising machine, register the tool on the centerlines and drill

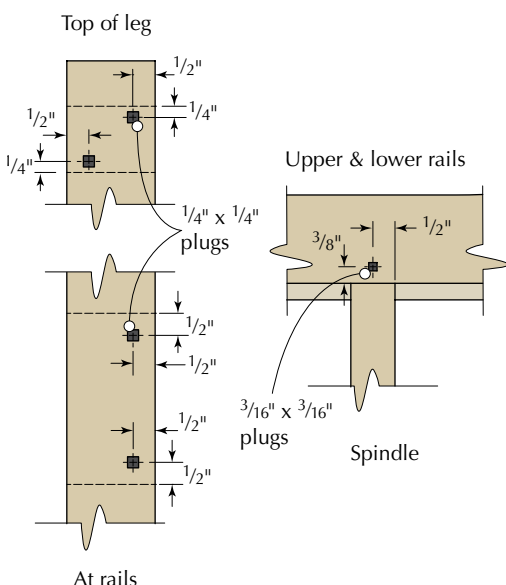

PLUG LOCATIONS



**Pack a punch.** These special punches work with a drill bit to remove waste, and four sharp edges to make a square recess for plugs.

and punch the square holes. You may opt for punching the square holes in the rails after the dry-fit of the spindles to confirm their location.

## Grooves for Panels & Tongues

A groove down the exact center of the bottom edge of the top rail and the upper edge of the lower rail will serve to house the center panel and will also house an exposed tongue. The spindles will then saddle the tongue. The center panel is three sequenced pieces cut from the same board. The  $\frac{1}{8}$ " gap between the pieces allows for wood movement and makes for an interesting design feature.

Before routing the groove, first set your router table up with a  $\frac{3}{8}$ " upcut-spiral bit and make a test cut running scrap material against the fence. This bit will be used later to rout the saddle on the ends of the spindles. Measure the width of this cut precisely and default to it for the  $\frac{3}{8}$ "-wide dimension for the groove.

An old trick to ensure precise center registration is to make two passes with a smaller bit (or blade) from opposing sides. With this in mind, set up a router with a  $\frac{1}{4}$ " slot cutter; use scrap rail material of the same thickness to make test cuts until a  $\frac{3}{8}$ "-wide (matched to previous test cut) x  $\frac{1}{2}$ "-deep groove is achieved.

Go ahead and rout the groove into the top edge of the lower rail and the bottom edge of the top rail. Be sure to stop the cut shy of the top rail tenon. Using a chisel, square up the rounded corner left in the end of the groove in the top rail. Referring to the cutlist, you can now mill the center panel and tongue material to match the  $\frac{3}{8}$ " thickness of the groove.

Before you break down the router setup, add a  $\frac{1}{8}$ " wing cutter to the  $\frac{1}{4}$ " cutter (the  $\frac{1}{2}$ " depth stays the same). On the inside of the headboard legs, mark a line  $\frac{1}{8}$ " in from the bottom two mortises. This is the space where the bottom headboard panel will go. Using the centering method of routing from both sides, use scrap material to adjust the cut to the thickness of the lower panel material. Then rout between the



PREPARE THE GROOVES



**Protect the tenon.** The groove in the rails is deeper than the tenon shoulder, so stop short with the router and square the end with a chisel.



**In between.** The ends of the veneered plywood lower panel in the headboard fit in this slot between the mortises in the legs.

lines on the legs.

Again, using the same centering method (on scrap material first) re-adjust the router and make grooves for the lower panel in the two lower headboard rails. Shape the corners of the panel to match the rounded end of the grooves.

The top of the legs are softly pilowed. To accomplish this, mark a line 1/4" down from the perimeter of the

top. Using a disc or edge sander, pivot from the middle (leaving the middle high) to sand down to the marked line. Repeat for both directions. With #80-grit sandpaper, smooth out the facets left by the disc sander and round over the sharp corner that adjoins the face. Round over the perimeter at the bottom of the legs with a 1/4" bit. All other exposed corners, except on the tongue, get a 5/32" roundover.

The arch in the upper rail starts at the centerpoint of the middle spindle: therefore the tongue, from that point, must follow the arch. With the long straight tongue in place, put the arched tongue piece in the groove, butted up against the straight piece. With the arched tongue in the groove, use a spacer to mark a line that is about 7/16" proud of the arch. Band saw to the waste side of the line, then glue all the tongues in place (top and lower rails both). Next, using a router with a 1/4" spiral bit and 1" collar (which produces a 3/8" offset), rout the arch into the tongue piece.

Dry-fit the legs and rails to confirm the length of the two outside spindles is 8 3/4". Next, make two sets of three spacers—one set at 3 3/4", one set at 2 13/16" and one set at 1 15/16" – the spacing between the spindles. With the legs and rails dry-



**Soft touch.** The tops of the legs and edges of the legs and rails are gently rounded.

Thorsen House Bed

NO.	ITEM	DIMENSIONS (INCHES)			MATERIAL	COMMENTS
		T	W	L		
❑ 2	Footboard legs	1 7/8	2	21 13/16	Khaya	
❑ 2	Headboard legs	1 7/8	2	32 1/2	Khaya	
❑ 3	Rails (2 head, 1 foot)	1 1/2	5 7/16	36 1/2	Khaya	1" TBE*
❑ 2	Top rails	1 1/2	2 15/16	36 1/2	Khaya	
❑ 12	Spindles	1	1 1/8	11	Khaya	Cut length to fit
❑ 1	Headboard lower panel	1/2	6	36 3/8	Khaya Ply	
❑ 2	Lower rail tongue	3/8	7/8	11 3/8	Khaya	
❑ 2	Upper rail tongue	3/8	7/8	8 1/4	Khaya	
❑ 2	Upper rail arch tongue	3/8	1 3/4	2 1/2	Khaya	
❑ 2	Bed rails	7/8	5 7/16	82 1/8	Khaya	
❑ 2	Bed rail cleats	1	1 1/2	82 1/8	Any	
❑ 18	Slat spacers	3/4	1 3/8	4 9/16	Any	
❑ 18	Slats	3/4	4 1/2	36 1/16	Any	

CENTER PANELS

❑ 2	Blank	3/8	12	10 1/2	Khaya	**
❑ 2	Center pieces	3/8	6 1/4	10 1/2	Khaya	**
❑ 4	Side pieces	3/8	2 5/8	10 1/2	Khaya	**

\*TBE=Tenon Both Ends  
\*\*One center and two side pieces cut from each blank for grain match



**Two step.** The exposed tongue is in two pieces, use a spacer to gauge the sizing of the curved portion.



**Spindle spacing.** Cut spacers to locate the vertical spindles and mark the ends for length and for the correct angle.



**In the saddle.** The slots in the ends of the spindles fit over the tongues in the rails. Angled stock safely guides the workpiece.

fit, position the spacers to rest on top of the tongue, as seen in the left photo on the next page. To determine both the angle at the top of the spindle and the overall length, use a piece of scrap for testing until a good fit is achieved.

Next, with the same  $\frac{3}{8}$ " upcut spiral bit used to gauge the width for the groove, set the bit in the router table to a height of about  $\frac{3}{8}$ " and about  $\frac{3}{8}$ " from the fence. Run tests on scrap spindle material until the cut is exactly centered and saddles the groove perfectly. When running the actual parts, make sure to use a fresh block of wood to back up the cut. The angled ends will require an angled back-up block. With the same setup on the router table, rout the groove for the center panel into the appropriate spindles. This should be down one long side only of the spindles adjoining the panel.

From the blanked-out center panel material, cut in sequence the center and side pieces. Roughly size the panels to length by cutting a curve along the top edge to approximate the arch in the top

rail. Leave the panel about  $\frac{1}{16}$ " shy of bottoming out in the groove.

Next draw the scroll pattern out full scale (including the panel outline, below) and make a couple of copies. The pattern is also available online. Cut the drawing to the panel outline and use spray adhesive to attach it to the panel. Drill entry holes and use a scrollsaw to cut out the pattern. Finish off by rounding over the scroll pattern with a  $\frac{1}{8}$ " radius set slightly high.

For this project I recommend using bed rail hardware. Lay out the hardware location and rout or chisel out the mortise. Two deeper mortises within the primary mortise are required in

the legs to clear the hooks.

Before gluing up, dry-fit both the headboard and footboard to ensure all is fitting properly, then sand all parts to #220 grit. Before the "big glue-up" get a couple of sub-assemblies out of the way.

First, apply glue to the panel groove of the two center-most spindles and again dry-fit all other parts to ensure correct positioning of the glued parts. Break down the dry-fit parts and clamp the glued parts. Next assemble the headboard with the outside spindles placed against the legs to act as space holders. Run glue only between the lower two rails and the  $\frac{1}{2}$ " veneered panel – do not glue the rails to the legs.

## SUPPLIES

### Woodcraft

woodcraft.com or 800-225-1153

1 ■ bed rail fastener

#127456, \$13.69 (set of four)


### Lee Valley Tools

leevalley.com or 800-871-8158

1 ■ square hole punch,  $\frac{1}{4}$ "


#50K59.04, \$26.50

Prices correct at time of publication.

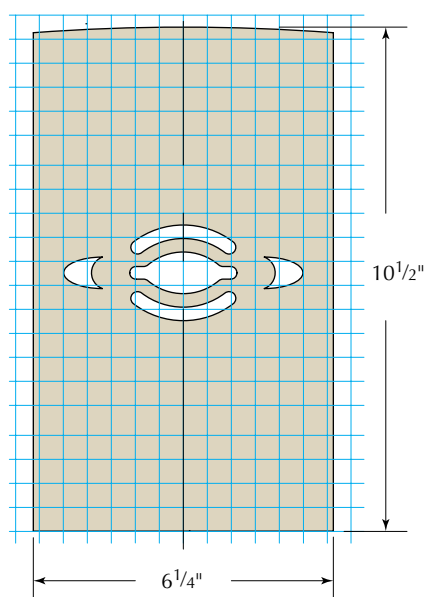


CENTER PANEL PATTERN

Grid =  $\frac{1}{2}$ " squares

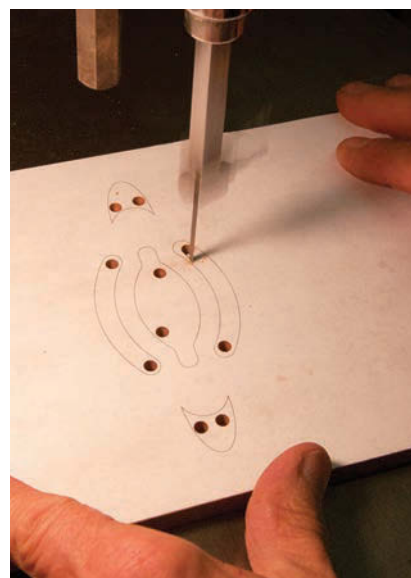

**Front & center.** The pattern cutout in the center panel is too small and delicate to rout. Drill entry holes and cut with a scrollsaw.



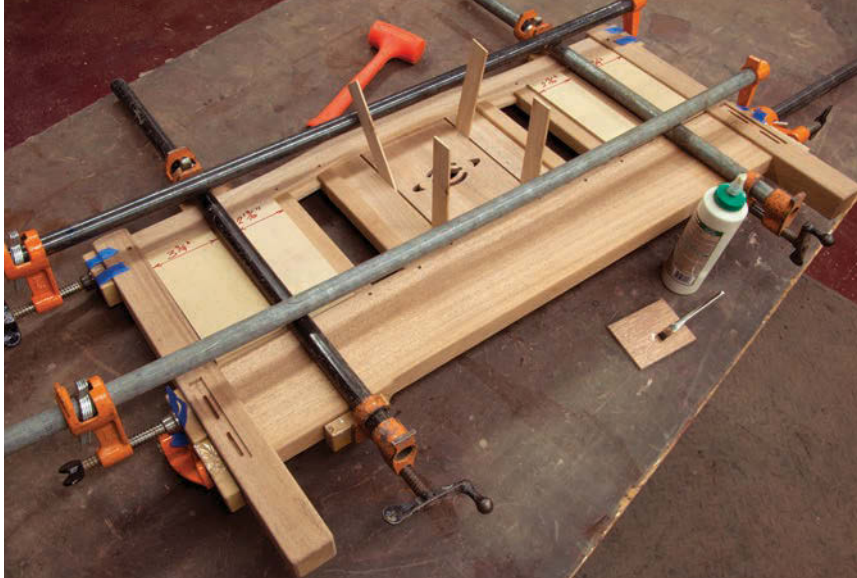

**Be prepared.** Before final assembly, glue the outer panels to the spindles, and have spacers ready for the panels and spindles.

For the big glue-up use the spacers to position the spindles and  $\frac{1}{8}$ " sticks to ensure even spacing of the center panel pieces.

### Finishing Touches

Mill long stock that is a few thousandths (very light  $\frac{1}{64}$ ") over-size of the faux-tenon mortises in thickness and width. Now rout a  $\frac{1}{8}$ " radius around the perimeter of the end and run a mark down the center. Start with #80-grit sandpaper and use a see-saw motion and sand until the center mark disappears and the  $\frac{1}{8}$ " radius is blended with the face. Continue sanding up through #320 grit. Cut the finished faux tenon off at about  $\frac{1}{2}$ " then lightly back bevel the insertion end.

With a toothpick, spread a little glue around the perimeter of the mortise and then gently tap the faux tenon in with a plastic headed mallet, stopping just

shy of the line that defines the face of the perimeter.

As with the faux tenons, mill out ebony stock in long rods a few thousandths larger than the size of the corresponding square hole. Using a pendulum motion, shape and sand the end of the square rod up to #600 grit, then polish with white rouge. Cut the finished end off at about  $\frac{1}{4}$ " and back bevel the insertion end. Tap the peg in with a plastic-headed mallet.

To complete the bed rails, glue a 1" x  $1\frac{1}{2}$ " cleat to the bottom inside edge. Next attach the  $\frac{3}{4}$ " x  $1\frac{3}{8}$ " x  $\frac{4}{16}$ " slat spacers to the cleat with  $\frac{4}{16}$ " between each piece. Cut the slats from any wood on hand.

To color the wood and raise the grain, lightly scuff-sand with #320 grit. Using General Finishes dye stains, mix seven parts orange dye stain with four parts medium brown.



**Fake it.** The smaller exposed tenons are just for show. Glue them in place after assembly.

It will take about three applications of the dye stain to achieve the desired shade. For the top coat use General Finishes Arm-R-Seal satin. Wipe on about five thin coats, making sure to use compressed air to blow out excess finish from the nooks and crannies. Wipe each coat bone-dry.

The bed is made for a 36" x 80" mattress. This is a typical size for college dorms, but can just as easily be used for a child's bed or, because of its extra length, for a spare adult bed where space is an issue.

With all the effort behind you, sign your work and pat yourself on the back for a job well done. May your new piece of furniture be passed down in your family for generations to come. **PWM**

Darrell is the author of "Greene & Greene: Design Elements for the Workshop" (Linden). See more of his work at [furnituremaker.com](http://furnituremaker.com).



**Support.** Cleats attached to the inside of the rails support slats. Spacers glued to the cleat keep the slats at an equal distance.

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**PANEL PATTERN:** Download a full-size pattern of the center panel in PDF format.

**ONLINE:** Visit the author's web site to see photos of his work, read his blog or purchase his book, "Greene & Greene: Design Elements for the Workshop."

**IN OUR STORE:** "Thorsen House Side Table," an adaptation of the Thorsen House plant stand.

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)

# Dan's Whetstones

BY LARRY WILLIAMS & DON MCCONNELL

This family business is the world's largest producer of natural Arkansas oilstones.

As planemakers at Old Street Tool, we do a lot of sharpening and have developed a sharpening process that is easy to maintain, efficient and effective (see “Traditional Honing Technique,” page 50). And, because we occasionally teach and do trade shows, we are often asked about our sharpening process, especially regarding the use of Arkansas oilstones.

Through these discussions, as well as comments on online woodworking forums, we've come to suspect there are some significant misconceptions about Arkansas stones and their usage.

There appears, for example, to be widespread perception that the best-quality Arkansas stone supplies are quarried out and there is a rapidly declining supply of the remainder.

We've also come to realize there may be some suspicion that we use and recommend Arkansas stones because we live and work in the state. We know this not to be the case because we both used Arkansas stones before moving here – but did recently decide to take advantage of our relative proximity to the source and explore the quarrying and production of Arkansas stones as it is carried out today.

Our 4½ hour drive south from the Ozark plateau in Northwest Arkansas takes us through the Boston Mountains as well as miles and miles

of the Ouachita National Forest. As we approach the Hot Springs/Ouachita Mountains area, we realize that we are entering a geologically interesting region. We are, for example, greeted by many yard-sale-type offerings of various crystals. And we notice signs for the Crater of Diamonds State Park (where visitors are encouraged to hunt for diamonds in freshly prepared soil), which is some distance beyond our destination of Percy, Ark. Percy, in turn, is a few miles west of Hot Springs, both of which are in Garland County.

We don't realize, however, that we are about to meet a remarkable man and be entranced by him and the small company he's developed, Dan's Whetstones, which produces a variety of top-quality Arkansas stone products. Clearly, the supply is not played out.

## A Hobby Becomes a Business

Dan Kirschman, a graduate of the Colorado School of Mines with an engineer of mines degree, worked for a number of years as a mining representative – work which eventually brought him to Hot Springs. During his tenure there, he began cutting and finishing Arkansas stones as something of a hobby. Then, in 1976, when he was asked to move pursuant to his mine engineering work, he decided to remain in the Hot Springs area and turn his hobby into a business.



Dan is a soft-spoken, articulate and knowledgeable man who has a fascinating variety of personal interests – and he's particularly passionate about Arkansas stones (which are properly called “novaculite”). During a period when natural Arkansas stones have met with sharp competition from a burgeoning variety of other natural and man-made sharpening stones, Dan has steadily built a business producing a wide variety of novaculite products catering to a number of different markets.

With a workforce varying between 28 and 30, Dan's Whetstones, produces stones for sharpening medical and dental products (their largest market), kitchen cutlery and sporting goods such as knives, as well as woodworking tools.

Additionally, the company provides novaculite products for non-sharpening uses, such as for knapping to produce flints used in muzzle-loading





**Hobby to business.** Dan Kirschman, a graduate of the Colorado School of Mines, used to cut Arkansas stones for fun. His hobby eventually became the family business: Dan's Whetstones.

standard classification of Arkansas stones, and adds some additional classifications for its own use.

The company's Ouachita stones have a specific gravity of 2.25 or less (approximately #400 to #600 grit), the soft Arkansas stones have a specific gravity of 2.25 to 2.30 (#600 to #800 grit), the hard Arkansas stones have a specific gravity of 2.30 to 2.45 (#800 to #1,000 grit), while Dan's "true hard," "black hard" and "translucent" Arkansas stones all have a specific gravity of 2.50 or more (#1,200 grit or higher).

The various colors of the stones are due to a variety of trace minerals present in the stone (typically 99 percent silica), and Dan says these colors have little, if any impact on their abrasive quality. Density is, by far, the more important factor.

Dan stresses his belief that the varying tables of grit sizes associated with various sharpening media has led to much confusion regarding the fineness of Arkansas stones relative to other materials. He also observes that some vendors are offering "hard black Arkansas" stones that do not conform to the specific gravity standards. They may be hard, black(ish) and from Arkansas, but they do not meet this standard for novaculite. (If you have a stone you're not sure of, you can usually tell visually. Hard Arkansas stones of any color will

rifles. Dan's also supplies hard black Arkansas stones for use in testing gold quality, which is made possible by the stones' uniformity of texture and color.

In the medical field, the uniquely pure and uniform crystalline structure of novaculite is used for calibrating X-ray diffraction equipment.

## Novaculite

In brief, what is novaculite? It starts out as a sedimentary deposit of very fine and uniform microcrystalline quartz (chert), which was recrystallized, presumably during the folding process that created the Ouachita mountains. While novaculite of varying quality underlies much of these mountains (extending across Oklahoma into Texas), it is the purest form and most accessible in the Garland and Hot Springs counties of Arkansas. Examples of this material have been used in lieu of flint since

pre-historic times, and it has been quarried since early European settlement in the area. Quarrying, for purposes of producing whetstones, began in earnest in the latter part of the 19th century, when Arkansas stones found favor because they were perceived to be fast cutting relative to the finish they imparted when compared to other stones already in use.

## Cutting Qualities

Dan considers all Arkansas stones to be "polishing" stones, and notes that the size of the crystals in the various grades of novaculite range fairly uniformly between 3 and 5 microns. What differentiates the aggressiveness or fineness of their abrading qualities is their density. The more closely packed the crystals, the denser and finer they are considered to be (see "A (Very) Close Look" on page 51). Dan's follows the



**Hard Arkansas or not?** A waxy, translucent appearance on any color stone usually indicates that it's a hard Arkansas stone (left). Others look dull in comparison (right).

## TRADITIONAL HONING TECHNIQUE

When we demonstrate sharpening, people often miss the most important part, because modern honing guides focus on a tool's bevel rather than the critical flat face that makes up half the cutting edge.

What allows speed, dependability and ease of traditional sharpening is maintaining the flat face (back) of a tool. Work so that the first 1" to 1½" of the flat face uniformly contacts each stone in progression. For this to work properly, each stone and the flat face of the tool needs to have the same topography. And "flat" is the easiest repeatable topography to create and maintain.

This uniformity allows the sharpener to use the coarsest stone necessary for whatever correction the edge needs, then to quickly remove the abrasive signatures on any subsequent stones.

We prefer oilstones because they tend to wear slowly but, contrary to what you may have been told, oilstones do wear and need to be flattened. Abrasives dull in use and flattening exposes fresh abrasives. We dress our oilstones with an extra-coarse diamond stone at each use (or when the cutting action slows) and check for flatness with a straightedge. We leave the resulting slurry on the stone for use. The more precise you are in flattening the stones, the easier and faster it is to hone the flat face of tools. When honing, you are also doing the preparation work for subsequent sharpening – so avoid doing anything that will complicate your next honing.

Both surfaces that make up a cutting edge experience wear, so both must be maintained. Even a relatively large flat-face wear bevel on a bevel-down plane iron can be removed by six or eight passes on a freshly dressed medium or fine India stone. Then it shouldn't take any more passes than that on a dressed hard Arkansas stone to remove the abrasive signatures of the India stone.



**Flat back.** The back is the most important surface to address when sharpening an edge tool. Notice the wear bevel at the cutting edge.

Honing is done on the bevel only to raise a uniform wire edge. Generally in traditional sharpening, the primary bevel is ground around 25°; honing is at around 30°. After a tool is initially tuned, grinding is done only to maintain a small

honed 30° bevel. We maintain this honed bevel at between 1/32" to 3/32".

When honing the bevel, it should take only a couple passes to raise a wire edge. You don't need a honing guide; it's easy to maintain a uniform angle by hand for a couple passes. The entire honing process should take less than a minute – including the time spent dressing stones.

The wire edge is a critical control mechanism in traditional sharpening. It is removed and recreated each time you switch to a finer stone. The final step is to remove the final wire edge by working the flat face on the finest stone you're using.

To work, abrasives must be harder than the material you are abrading. With a Mohs hardness of 7, Arkansas stones are slightly softer than the carbide inclusions in some of the steels used today. Arkansas stones don't work on steels like A2. Woodworkers who prefer A2 steel cite its abrasion resistance. However, the dulling wear to plane irons can't be the result of abrasion because the overwhelming majority of domestic woods used in woodworking have, at most, trace amounts of silica or anything else harder than normal high carbon steel.

— LW & DM

typically have a waxy, almost translucent appearance while other stones will look "dull" by comparison.)

Dan's company holds the surface and mineral rights to 320 acres with proven mineral reserves. In other words, contrary to popular perception among woodworkers, there is no shortage of novaculite – including hard black Arkansas stone, the quarrying, cutting and finishing of which Dan based his business on from the beginning.

In brief, large chunks of novaculite are obtained at the quarry by hand drilling 8' deep holes and blasting with black powder. These large chunks are somewhat reduced in size for transport through the use of wedges and feathers (the flared metal sleeves into which the wedges are pounded) – a method which seems primitive but is quicker than using a stone saw. At the works, these still largish chunks are then further reduced in size, called blocking, by using a 54"-diameter saw with diamond-tipped teeth.

Then somewhat smaller, gravity-fed saws (36" and 18" diameter) are used to slab the blocks into pieces the width of the desired stone. These slabs are then sliced according to the thickness of the desired stone, followed by cutting them to the desired lengths, tempered with the presence and location of any flaws.

What becomes increasingly apparent as we watch this process is the judgment and decision-making exercised at every step. Indeed, the very orientation of the initial cuts, relative to the bedding layers, changes depending on the



**Now that's a saw.** Large chunks of stone are cut down to a workable size on this 54"-diameter stone saw.



"You will find something more in woods than in books. Trees and stones will teach you that which you can never learn from masters."

—Saint Bernard (1090-1153)  
French abbot

type of stone being cut. Reassessment takes place after each cut, and decisions are made in order to produce for the current order if at all possible. If not, the next step is to decide how to cut the stone in order to fill future orders for existing or potential markets. Much material is lost during the process and only about 5 percent of quarried material winds up as a finished product.

Once the stones are cut to final dimensions they are flattened and polished on rotating lapidary tables. The abrasive used is silicon carbide. The process starts with #90 grit, which is then recycled as it gets finer for use with the finer and harder stones. Dan emphasizes that the factory finish off these lapidary machines can be refined by the end user through rubbing on fine sandpaper or a similar abrasive on a flat substrate. At Old Street Tool, we use a diamond plate (see "A Traditional Honing Technique" at left).


Among those involved in this process are two of Dan's sons. Steve Kirschman specializes in cutting the most desirable and scarcest grades of stone, while Sterlen Kirschman does final grading and sorting of stones for inventory and orders.




**Cut to size.** To further reduce the stones' size, they're cut on a row of 36"- and 18"-diameter saws. The enclosures help to contain the dust.

## A (VERY) CLOSE LOOK

At 5,000x magnification, note that the grain size is the same in both a black Arkansas and hard white stone. When they're magnified only 500x, however, you can clearly see the voids in the hard white stone. This density – how closely the grains are packed together – makes the black Arkansas behave like a finer stone, despite the similar grain size. — LW & DM

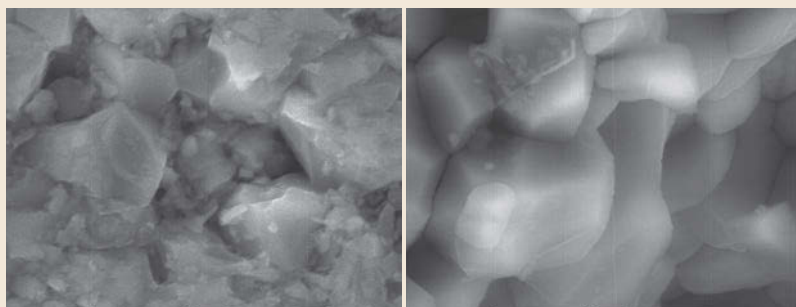

5,000x. Black Arkansas (left) and hard white (right) are almost the same grain size.

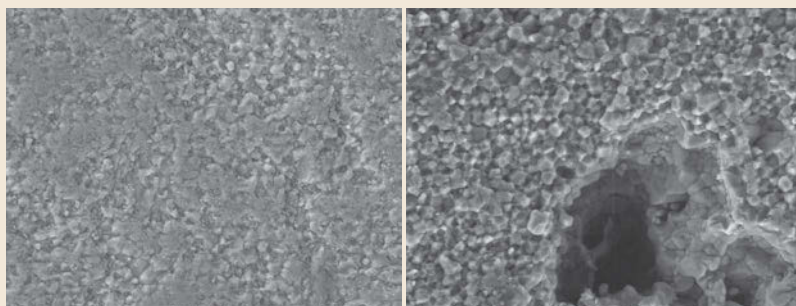

500x. The density of the grain, however, is tighter in the black Arkansas stone (left).

As we drive home from our visit, we marvel at what we've seen and heard. While there are fewer producers of Arkansas stones than there were just a few years ago, it seems there remains plenty of novaculite to quarry. And this small but growing company is determined to

keep high quality novaculite products available for a wide variety of applications. We feel indebted to Dan, his sons and his employees, whose passion for this natural material makes it still available for sharpening our woodworking tools. **PWM**

Larry and Don are the owners and makers of Old Street Tool wooden planes ([planemaker.com](http://planemaker.com)).



**Rotating tables.** Silicon carbide in progressively finer grits is used to grind the stones smooth on rotating lapidary tables.

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**WEB SITE:** Visit Dan's Whetstone's site.

**IN OUR STORE:** "Making Traditional Side Escapement Planes," a DVD by Larry Williams.

**TO BUY:** "Traditional Molding Techniques: The Basics," a DVD by Don McConnell.

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)

# Fast Fix For Teetering Legs



**Plane dealing.** Use a table saw as if it were a plane to quickly shave down unstable legs to level a wobbly seat.

BY GARY ROGOWSKI

A simple table saw technique levels four legs in no time flat.

**R**ock-n-roll. That's what four-legged pieces have a habit of doing – even with perfect joinery and a careful and unhurried assembly. Even with all the care and attention you paid to building it correctly, it doesn't sit flat on your floor but moves back and forth rocking on two legs. What gives?

Don't worry; it's just life at the bench and Euclidean geometry raising its head again. If you build everything with three legs, you won't have this problem. But because a lot of tables and chairs have four legs, you are constantly faced with this issue. Just a little pull from one of the joints and your chair or table doesn't sit flat. The legs are still the same length but they're pulled out of true or flat by your assembly.

## The Problem

Let's say you need to remove a bit of length from one or two legs. As little as a  $\frac{1}{32}$ " or  $\frac{1}{16}$ " can be a lot to take off with a handplane, but too little to remove with a saw – even if you could line up your saw perfectly. So, how do you true the legs without either making your chair too short or making yourself frustrated in the process?

Let's understand the problem first. A four-legged chair doesn't sit flat for one of two reasons. It either sits on an uneven floor or the chair itself is twisted. How do you determine where the problem lies? As I tell my students and all my clients, my bench is the Center of the Universe. If it sits flat on my bench, then it's flat. If it moves to the floor and rocks, it's the floor. Of course you could move the piece around until it finds a spot where it's not tipping then never move it, but that's not a reasonable solution. So for all intents and





**Twisted board, twisted legs.** This twisted board illustrates just how a four-legged piece can also twist. There are two opposing high sides vs. two low ones. The winding sticks show what's high and low.

purposes, my bench is my reference surface and sets the standard to which I work. If the piece sits flat on my bench, then it's good to go out the door.

Four-legged pieces can twist for any number of reasons: too much clamping pressure on one side versus the other, mortises cut slightly off center from each other or tenons made at slightly different locations. Little things during construction can add up to small variations that result in a rock so bad in the piece that you think your wood is possessed. (Heck – the boards may actually be possessed and moved or warped as you cut them.) Clearly, this can affect your joinery. Any of these things can add up to a piece that seems to have two longer legs. Even if your legs are equal in length, your task is to trim the bottoms of the seemingly longer ones.


Now you have to make sure you know which leg or legs to trim. A piece rocks because it developed a twist and two legs are pulled up and seem shorter than the other two. It's just like a board that's twisted or a cabinet face that isn't flat. Two opposing corners are high or longer, and two are low or shorter. When adjusting a four-legged piece that's teetering, the first critical mistake you can make is to remove wood from the wrong legs. To determine which legs need adjustment, set the piece on your bench and push down on one pair of opposing legs and then the other. The piece will rock easily when the short legs are pressed. Pushing on the long legs yields no movement. These are the legs to cut. Get this straight in your head and mark the long legs with chalk before making any cuts.

The common solution to adjusting the leg length is to saw the legs off or handplane the bottoms of the legs to shorten them. Sawing, if not done exactly right the first time, can lead to a succession of cuts that can render your chair suitable only for the kiddie table.

A second solution is done at the bench using a handplane or rasp, but it's difficult work because you're removing end grain from the bottoms of the legs. If you don't own or can't sharpen a handplane, it will be slow going. A file or rasp has a tendency to round over the leg. You also have to figure out



**Find the culprits.** Check for twist using the bench as a flat reference surface. Pushing on opposing corners will identify which legs are longer, mark those with chalk.

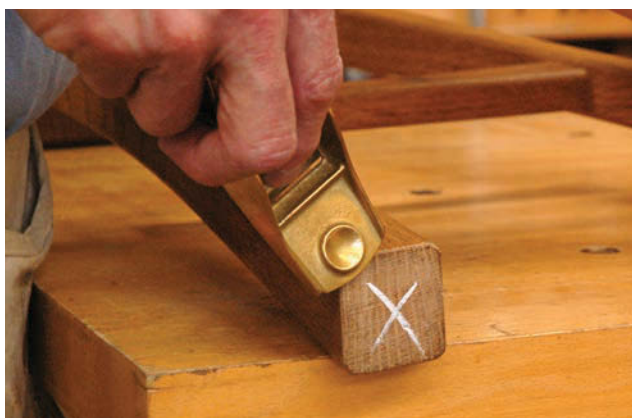

**There's got to be a better way.** Truing legs with a block plane requires time and ingenuity to make sure the piece stays stable and doesn't tear out as you attempt to trim it to length.

a way to hold the piece securely while you work on it. You could try belt sanding the long legs but the risks are too great. So what is the answer? Use your table saw instead, but use it as a plane.

## The Solution

Now stop gasping. This method works great if your saw table is flat, you set the blade height properly and you are reasonably sure handed. The table saw table acts as your reference surface with the blade shaving off a tiny amount from the bottom of the leg that's too long. To get started, set the table or chair on the table saw table and see if it's rocking the same way it did on your bench. If not, then one or maybe both of those surfaces aren't true. But if you're getting the same results, proceed with this surefire technique.

If you have a blade with flat-top grind (usually a rip blade) for your saw, put that on because it tends to cut more quickly and create a slightly smoother cut with less tear-out than an alternate-top-bevel blade. Now the key is to set the blade height for about  $\frac{1}{64}$ " – just enough to feel it coming out of the table. This will be enough to remove some wood but not so much that it creates problems.



**Barely there.** Set the blade height for a mere  $\frac{1}{64}$ " to  $\frac{1}{32}$ ". You should just feel the blade coming up out of the table throat plate insert. A saw blade with a flat-top grind works best.



**Quick shave.** True a leg on the table saw the quick and easy way. Make sure the blade is set for a very small cut. Laterally move one of the longer legs slowly over the spinning blade.

"Creativity is allowing yourself to make mistakes. Art is knowing which ones to keep."

—Scott Adams (1957-),  
Cartoonist, creator of "Dilbert"



**Bottoms up.** Check to see if you cut all the way across the bottom of the leg. Sometimes you'll miss the corner of a leg.

Material is removed from the bottom of the leg by moving it laterally across the top of the saw blade. Because there's so little exposed blade there's no danger of kickback or having the saw pull the piece out of your hands. Grab the piece with two hands, switch on the saw and move one of the long legs slowly over the saw blade. Take your time with this and use the saw blade as a plane rather than a saw.

Perhaps a better way to think of this is taking little planing or shaving cuts off the bottom of the long leg.

As you begin to remove material, make sure you're not taking too much off in one pass, because that can cause blowout on the edges of the legs. Move the leg off the blade and check to see how you did. As you proceed, check your legs on the flat surface of your table saw to measure your progress.

With light pressure and very little blade exposed you can take off a surprising amount of material in a hurry. If you have more than  $\frac{1}{16}$ " to remove, alternate between the two long legs so you keep them close to the same length. Continue removing material until the piece sits flat.

When the piece no longer rocks on the saw table, take it to your bench and clean up the leg bottoms with a few quick passes using either a block plane or file. Chamfer the leg's bottom edges then set it on your bench to check again for flat in the center of your universe. **PWM**



**Bench flat is flat.** When the stool no longer rocks on your bench, your work is done. Your four legs have been tried and trued.

Gary is a furniture maker, teacher and author of numerous woodworking books and magazine articles.

He also operates the Northwest Woodworking Studio, a school for woodworkers, in Portland, Ore. ([northwestwoodworking.com](http://northwestwoodworking.com)).

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**VIDEO:** Watch a short video on how this leg-shaving technique is done using a table saw.

**WEB SITE:** Visit Gary Rogowski's Northwest Woodworking Studio site for information on classes and to view a gallery of his work.

**BLOG:** Read about an alternate method to solve the wobbly four-leg syndrome.

**IN OUR STORE:** Get our 76-page Essential Guide to Table Saws in convenient digital download format.

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)





New Year Special  
10% OFF your total  
purchase  
OR FREE Shipping  
Valid until 2/28/2013

With over 30 years of  
experience in producing lumber  
dryers you can count on EIP's  
dependability and simplicity.



### Ebac Industrial Products Inc

700 Thimble Shoals Blvd, Suite 109,  
Newport News, VA 23606-2575

Tel 757 873 6800 Fax 757 873 3632

Toll Free 1-855-873-6800

[www.ebacusa.com](http://www.ebacusa.com)

CARD #10 or go to PWFREEINFO.COM



**Hand tools for the serious woodworker**

32 33rd St. Brooklyn, NY 11232

[www.toolsforworkingwood.com](http://www.toolsforworkingwood.com)

**TOOLS FOR  
WORKING WOOD**

CARD #45 or go to PWFREEINFO.COM

### STEVE WALL LUMBER CO.

Quality Hardwoods and Woodworking machinery For The Craftsman  
and Educational Institutions

Ash .....	4/4	Select	\$ 2.60		\$ 94.00
Basswood .....	4/4	Select	\$ 1.95		\$ 80.00
Birch .....	4/4	Select	\$ 3.55		\$ 108.00
Butternut .....	4/4	1C	\$ 2.95		\$ 88.00
Cherry .....	4/4	Select	\$ 4.90		\$ 117.00
Hickory - Pecan .....	4/4	Select	\$ 3.00		\$ 100.00
Mahogany (Genuine) .....	4/4	Select	\$ 4.70		\$ 112.00
Maple (Hard) .....	4/4	Select	\$ 3.45		\$ 108.00
Maple (Soft) .....	4/4	Select	\$ 2.50		\$ 88.00
Poplar .....	4/4	Select	\$ 1.80		\$ 78.00
Red Oak .....	4/4	Select	\$ 2.70		\$ 96.00
Walnut .....	4/4	Select	\$ 4.90		\$ 115.00
White Oak .....	4/4	Select	\$ 2.70		\$ 96.00
Cedar (Aromatic Red) .....	4/4	1C+Btr.	\$ 1.80		\$ 78.00
Cypress .....	4/4	Select	\$ 2.60		\$ 90.00
White Pine .....	4/4	F.G.	\$ 1.25		\$ 70.00
Yellow Pine .....	4/4	Clear	\$ 2.30		\$ 82.00

**UPS  
Specials**

**SEE OUR  
CATALOG ON  
THE WEB!**

Above prices are for 100' quantities of kilndried rough  
lumber sold by the Bd. Ft. FOB Mayodan, NC. Call for  
quantity discounts. Other sizes and grades available.

Above prices are 20 bd. ft. bundles of clear  
kilndriedlumber 3"-10" wide x 3'-5' long (Random  
widths & lengths) Surfaced 2 sides or rough.  
Delivered UPS prepaid in the Continental U.S.

OLIVER MACHINERY DEALER

HARDWOOD PLYWOOD

CUSTOM RAISED PANEL DOORS

CUSTOM PLANK HRDWD FLOORING

THIN CRAFTWOOD

EXOTIC LUMBER

**STEVE H. WALL  
LUMBER CO.**

BOX 287

MAYODAN, N.C. 27027

336-427-0637

1-800-633-4062

FAX 336-427-7588

Email: [wood@walllumber.com](mailto:wood@walllumber.com)

Website: [www.walllumber.com](http://www.walllumber.com)

Send \$1.00 For Lumber Catalog  
Prices Subject to Change Without Notice

CARD #47 or go to PWFREEINFO.COM

# Router Joinery & Techniques DVD

with Glen Huey

**Router Joinery  
& Techniques**  
with Glen Huey



DOVETAILS  
FLUTING  
INLAY  
MORTISES  
RULE JOINTS  
CIRCLE CUTTING  
PATTERN WORK  
AND MORE...

Woodworking  
Magazine

There are a lot of router bits available – and with good reason: Routers can do a lot of different things in your shop. Edge details, inlay, joinery – there are hundreds of ways to use a router. In *Router Joinery & Techniques*, host Glen Huey shows you some of his favorite router applications. Along with those mentioned above, Glen also shows how to cut circles with a router, do pattern work, create rule joints and dovetails and much more. If you're ready to push your router skills to the next level, this DVD is the one for you.

SKU: U2926

Retail Price: \$24.99

This and many more Popular Woodworking DVDs are available  
at [ShopWoodworking.com](http://ShopWoodworking.com) or call (855) 840-5118 to order

## BEST DOVETAILS

It's the truth.  
Order your Keller Dovetail System now!  
(800) 995-2456

Made in the USA since 1976 • DVD/Video \$8.95 + \$2 p/h

**www.bestdovetails.com**

CARD #26 or go to PWFREEINFO.COM

**The Beall Wizard**  
Raises the art of pen turning to a new level

541 Swans Road N.E. Newark Ohio Dept.  
1-800-331-4718 [www.bealltool.com](http://www.bealltool.com) PW

CARD #2 or go to PWFREEINFO.COM

**THE FURNITURE INSTITUTE of MASSACHUSETTS**

Study with Philip C. Lowe  
Classes range from 1 day to 1 week and 2 and 3 year mastery programs.

See new class schedule on:  
(978) 922-0615 [www.furnituremakingclasses.com](http://www.furnituremakingclasses.com)

CARD #16 or go to PWFREEINFO.COM

800.282.7201 ext. 7441  
[www.rio.edu/finewoodworking](http://www.rio.edu/finewoodworking)

**Learn from the past, build a future.**

- Certificate
- Associate Degrees
- Bachelor Degrees

and week long classes in the summer with Award Winning Hands-on Instruction.

CARD #79 or go to PWFREEINFO.COM

**Old English Academy of Fine Woodworking**

Michael J. Gray Master  
Hands on Instruction for Groups & Individuals

Weekend Classes Year Round  
P.O. Box 772 Selmer, TN 38375  
[www.oefcc.com](http://www.oefcc.com)

Learn the Fundamentals of Woodworking from an Old World Master

CARD #34 or go to PWFREEINFO.COM

**Your Perfect Workbench Deserves The Perfect VISE**

- Hard maple large vise screws
- 2-1/2 in. diameter x 24 in. length
- Fast action 2TPI thread

[www.lakeerietoolworks.com](http://www.lakeerietoolworks.com)  
814-528-4337

LAKE ERIE TOOLWORKS  
Traditional Tools for Today's Woodworkers

CARD #70 or go to PWFREEINFO.COM

**The APPRENTICESHIP**  
est. 1972  
A School for Traditional Boatbuilding and Seamanship

Offering workshops in traditional wooden boatbuilding & maritime arts on the coast of Maine.  
Full catalog of programs available at our website.

[www.apprenticeship.org](http://www.apprenticeship.org) ♦ 207-594-1800

CARD #74 or go to PWFREEINFO.COM

**Hands on Instruction for All Skill Levels**

Mario Rodriguez - Alan Turner

For more info on Courses: 215.849.5174

Philadelphia Furniture Workshop

[PhiladelphiaFurnitureWorkshop.com](http://PhiladelphiaFurnitureWorkshop.com)

[www.whitechapel-ltd.com](http://www.whitechapel-ltd.com) 1(800) 468-5534

**WHITECHAPEL LTD**  
est. 1987  
Fine Brass and Iron Hardware

CARD #48 or go to PWFREEINFO.COM

**CRAFTSMAN PLANS**

Authentic Reproduction PLANS BOOKS HARDWARE

Measured & Drawn by Robert W. Lang  
author of  
"Shop Drawings for Craftsman Furniture"

[www.craftsmanplans.com](http://www.craftsmanplans.com)

**100+ Hardwoods**

- ✓ Hand selected orders
- ✓ 100 woods in stock
- ✓ Expert knowledge
- ✓ 100% satisfaction

800-423-2450

No one has a better website for ordering wood:  
**www.101woods.com**

VISA MasterCard PayPal

CARD #53 or go to PWFREEINFO.COM

**Looking for wood?**

VISIT **woodfinder**

It's fast, easy and FREE!  
**www.woodfinder.com**  
No computer? Call toll-free 1-877-933-4637

**CraftsmanStudio.com**

TOOLS TO BRING OUT THE BEST IN YOUR WORK

Authorized dealers for  
Auriou, Lie-Nielsen, Shapton, Veritas & TANOS systerainers®

FREE SHIPPING ON ONLINE ORDERS - SEE WEBSITE FOR DETAILS - 888-500-9093

CARD #5 or go to PWFREEINFO.COM

**SHOP CLASS ON DEMAND**

Woodworking Videos at Your Fingertips

**Watch what you want, any time you want**  
with a 6-month subscription.  
You'll get instant access to every woodworking video Popular Woodworking Magazine produces.  
New videos added regularly!

**SUBSCRIBE NOW AT**  
[shopclass.popularwoodworking.com](http://shopclass.popularwoodworking.com)



# WOODWORKER'S MARKETPLACE

## CLASSIFIED

### Books

**WE HAVE A WIDE VARIETY** of woodworking books - from small projects, to home improvement, to enhancing your woodworking skills, and more! To see our full line of books, please visit our web site at [ShopWoodworking.com!](http://ShopWoodworking.com!)

### Finishing Supplies & Equipment

**BLOXYGEN SAVES LEFTOVER FINISHES** - Prevent Oxygen or Moisture damage. [www.bloxygen.com](http://www.bloxygen.com) or (888) 810-8311.

**WOODFINISHSUPPLY.COM -- SHELLAC.NET** Large Shellac Flake Selection - Brushes - Dyes BEHLEN Finishing Supplies - Stains - Aerosols RENAISSANCE Wax. 877-245-5611

### Hand Tools

**DI LEGNO WOODSHOP SUPPLY** Quality woodworking hand tools at an affordable price. [www.dlws.com](http://www.dlws.com) or 1-412-331-1236.

**WWW.JIMBODETOOLS.COM** The Largest Antique Tool Website on Earth! Fine Antique Woodworking Tools of every kind. 845-505-8665.

### Kits & Plans

**WORLD CLASS CHESS BOARD PLANS.** Read our reviews, our boards are the finest out there. Now available in meticulously detailed plans. [www.summerville-newengland.com](http://www.summerville-newengland.com)

**FULL SIZE FURNITURE LAYOUTS** Drawn by Philip C. Lowe. 978-922-0615. 116 Water St, Beverly, MA 01915. [www.furnituremakingclasses.com](http://www.furnituremakingclasses.com)

### Schools/Instruction

**JOHN C. CAMPBELL FOLK SCHOOL,** Brass-town, NC. Courses for all skill levels. Week-long and weekend classes year-round, taught by nationally known instructors. Friendly, supportive environment. Comfortable, on-campus housing. Delicious meals served three times a day. [www.folkschool.org](http://www.folkschool.org). 800/365-5724.

**FRED WILBUR TEACHES DECORATIVE** and architectural woodcarving using traditional methods. Please consult [www.FrederickWilbur-woodcarver.com](http://www.FrederickWilbur-woodcarver.com) for schedule and information. Contact Fred at [fcwilbur@verizon.net](mailto:fcwilbur@verizon.net) or write to P O Box 425, Lovington, VA 22949.

**PRIVATE CLASSES** with woodworking author in the Great Smoky Mountains- All skill levels- [www.GregoryPaolini.com](http://www.GregoryPaolini.com) (828) 627- 3948

**THE ACANTHUS WORKSHOP, LLC** Traditional woodworking education with lead instructor, Charles Bender, using conventional hand tools and modern machinery. Call 610-970-5862 or visit [www.acanthus.com](http://www.acanthus.com).

**THE SCHOOL AT ANNAPOLIS WOODWORKS,** Davidsonville, MD. Turning, Carving, Furniture Making, etc. Weeklong and Weekend classes for all skill levels. [www.annapoliswoodworks.com](http://www.annapoliswoodworks.com) 301-922-0649

### Seat Weaving Supplies

**CHAIR CANE & SPLINT,** Shaker tape, fiber & natural rush. Complete line of basketweaving supplies. Royalwood Ltd., 517-WW Woodville Rd, Mansfield, OH 44907. 800-526-1630. [www.royalwoodltd.com](http://www.royalwoodltd.com).

*Classified rate is \$6.00 per word, 15-word minimum. Order must be accompanied by payment; ads are non-commissionable. Send to: Popular Woodworking Magazine, 10151 Carver Road, Suite 200, Blue Ash, OH 45242 or Don Schroder, [d.schroder@verizon.net](mailto:d.schroder@verizon.net). Phone: 610-821-4425, Fax: 610-821-7884.*

## ADVERTISER'S INDEX

	PAGE#	CARD#	WEB ADDRESS
Acanthus Workshop	57	1	<a href="http://acanthus.com">acanthus.com</a>
Apprenticeshop, The	56	74	<a href="http://apprenticeshop.org">apprenticeshop.org</a>
Beall Tool Company	56	2	<a href="http://bealltool.com">bealltool.com</a>
Bloxygen	57	3	<a href="http://bloxygen.com">bloxygen.com</a>
Craftsman Plans	56	-	<a href="http://craftsmanplans.com">craftsmanplans.com</a>
Craftsman Studio	56	5	<a href="http://craftsmanstudio.com">craftsmanstudio.com</a>
Di Legno Woodshop Supply	57	6	<a href="http://dlws.com">dlws.com</a>
EBAC industrial Products	55	10	<a href="http://ebacusa.com">ebacusa.com</a>
Epilog Laser	17	56	<a href="http://epiloglaser.com">epiloglaser.com</a>
Forrest Mfg.	15	13	<a href="http://forrestblades.com">forrestblades.com</a>
Franklin International	7	14	<a href="http://titebond.com">titebond.com</a>
Frederick Wilbur Woodcarver	57	15	<a href="http://frederickwilbur-woodcarver.com">frederickwilbur-woodcarver.com</a>
Freud America	2	67	<a href="http://freudtools.com">freudtools.com</a>
Furniture Institute of Massachusetts	57	16	<a href="http://furnituremakingclasses.com">furnituremakingclasses.com</a>
General International USA	5	17	<a href="http://general.ca">general.ca</a>
Gorilla Glue	17	18	<a href="http://gorillaglue.com">gorillaglue.com</a>
Gregory Paolini Designs	57	19	<a href="http://gregorypaolini.com">gregorypaolini.com</a>
Grizzly Industrial	Cvr2, 1	57	<a href="http://grizzly.com">grizzly.com</a>
Harbor Freight	63	76	<a href="http://harborfreight.com">harborfreight.com</a>
Highland Woodworker, The	11	91	<a href="http://thehighlandwoodworker.com">thehighlandwoodworker.com</a>
Highland Woodworking	11	22	<a href="http://highlandwoodworking.com">highlandwoodworking.com</a>
Infinity Tools	15	23	<a href="http://infinitytools.com">infinitytools.com</a>
Jim Bode Tools	57	24	<a href="http://jimbodetools.com">jimbodetools.com</a>
John Campbell Folk School	57	-	<a href="http://folkschool.org">folkschool.org</a>

	PAGE#	CARD#	WEB ADDRESS
Keller & Company	56	26	<a href="http://kellerdovetail.com">kellerdovetail.com</a>
Lake Erie Toolworks	56	70	<a href="http://lakeerietoolworks.com">lakeerietoolworks.com</a>
Leigh Industries	11	-	<a href="http://leighjigs.com">leighjigs.com</a>
Lie-Nielsen Toolworks	11	29	<a href="http://lie-nielsen.com">lie-nielsen.com</a>
MLCS	19	81	<a href="http://mlcswoodworking.com">mlcswoodworking.com</a>
Old English	56	34	<a href="http://www.oefcc.com">www.oefcc.com</a>
Oneida Air Systems	7	35	<a href="http://oneida-air.com">oneida-air.com</a>
Philadelphia Furniture Workshop	56	-	<a href="http://philadelphiafurnitureworkshop.com">philadelphiafurnitureworkshop.com</a>
Powermatic	Cvr4	58	<a href="http://powermatic.com">powermatic.com</a>
RadarCarve	11	38	<a href="http://radarcarve.net">radarcarve.net</a>
Royalwood Ltd.	57	-	<a href="http://royalwoodltd.com">royalwoodltd.com</a>
School at Annapolis Woodworks	57	43	<a href="http://annapoliswoodworks.com">annapoliswoodworks.com</a>
Shellac.net	57	90	<a href="http://shellac.net">shellac.net</a>
Summerville-New England, LLC	57	91	<a href="http://summerville-newengland.com">summerville-newengland.com</a>
Tools for Working Wood	55	45	<a href="http://toolsforworkingwood.com">toolsforworkingwood.com</a>
University of Rio Grande	56	79	<a href="http://rio.edu">rio.edu</a>
Wall Lumber	55	47	<a href="http://walllumber.com">walllumber.com</a>
Whitechapel Ltd.	56	48	<a href="http://whitechapel-ltd.com">whitechapel-ltd.com</a>
Woodcraft	Cvr3	49	<a href="http://woodcraft.com">woodcraft.com</a>
Woodfinder	56	-	<a href="http://woodfinder.com">woodfinder.com</a>
Woodline	21	50	<a href="http://woodline.com">woodline.com</a>
Woodworker's Source	56	53	<a href="http://woodworkerssource.com">woodworkerssource.com</a>
Woodworker's Supply	15	54	<a href="http://woodworker.com">woodworker.com</a>

# Tool Chest Case Construction

Do 18th-century tools and techniques always work for modern pieces?

I'm in the middle of the construction of a machinist's-style chest to hold some of my smaller or modern woodworking tools. My goal with this project was to recognize the tool-storage needs of the majority of woodworkers and build something that would be more familiar to them. I was also interested in gauging my skills against modern styles of construction. Does my focus on 18th-century woodworking hinder me in executing modern work? I think the quick answer is yes.

## Carcase Construction

The basic case consists of 1/2"-thick solid wood side pieces attached to the front, back and bottom with screws. Though it's a departure from this style of construction, I attached the center horizontal divider to the case sides with sliding dovetails. I just didn't know how else to do it. The vertical dividers were glued and screwed into place.


## Clamping Woes

Joinery in the 18th-century style relies on interlocking wood joints, such as dovetails and mortise-and-tenon joints. These joints are strong and beautiful. They also allow a piece to be dry-fit. The joints both self-locate and self-clamp. Modern joinery often relies on glue joints. This can be tricky. You need a ton of clamps, and without locating features, each dry-fit can put parts in a different position.

Modern woodworkers have a couple workarounds that I don't have: Dowels or biscuits position parts relative to each other. I've seen Norm Abram use his pneumatic brad-nailer for the same thing. Modern woodworkers also often cut mating parts "net" (that is, to their finished lengths), something no hand-tool woodworker should do. My usual



**No nails, two tails.** My machinist's-style tool chest is screwed together (with the exception of two sliding dovetails for the horizontal divider). The filler strips have yet to be planed to match the case. Though a modern woodworker may cut parts to final size from the start, the traditional approach is to fit parts piece by piece.

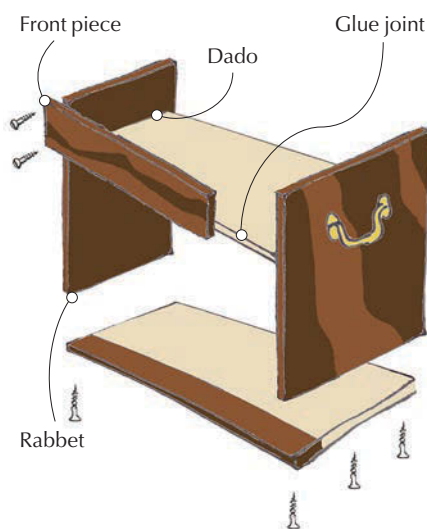

**Carcase.** The basic carcass is glued and screwed together. The bottom and back are let into rabbets. The front is applied, but this necessitates filler strips on edges of the sides to maintain a flat front.


approach is to leave parts long and plane them flush after they are joined. But cutting these pieces to size left me with one less reference face for positioning parts.

## The Flap

By far the trickiest part of this chest is the sliding front cover, which stows away under the bottom drawer. It slides on a pair of metal pins that run in a tiny dado at the bottom of the case. At the front of the case, the dado stops and turns down so the cover can hinge up without sliding back into the case. It's a clever detail, but it gave me some trouble.

I imagine modern builders could easily cut such a groove with an electric router. The only way for me to do a stopped dado is to chisel it. My solution came from the 18th century: Cut through-dados then apply a filler strip



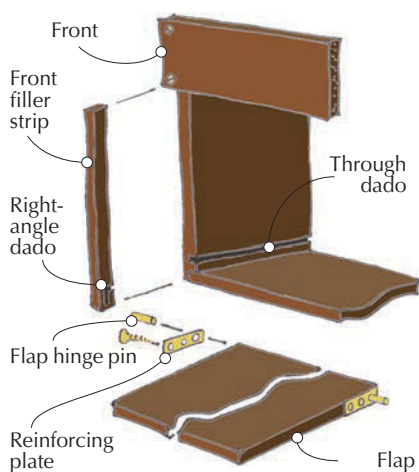

**Plates.** The flap, or drawer cover, slides on hinge pins that run in a dado in the carcase sides. To permit the flap to rotate in a minimal amount of space, the hinge pin must be close to the end of the flap. Gerstner & Sons uses reinforcing plates to stop the pin from cracking out in their chests. That solution is borrowed here for shop-made plates. You can see the layout scratched in the marking dye in the photo.



to the front. The right-angle portion of the dado was then carved into the filler.

## Do-it-yourself Hardware

I needed some simple but specific bits of hardware for this project so I decided to try to make them myself. The process is simple.

Apply a thin coat of marking fluid such as Dykem's marking dye. This allows you to mark the metal stock using your marking gauge and striking knife. You just score the dye. The dye is removable with alcohol. Saw using a hacksaw and file to the line.

For holes such as the one in my brass keyhole escutcheon, it's best to scratch in a location accurately, then mark the hole with a center punch. The drill bit will find the punch mark. The finished parts can be polished and lacquered.

It's not uncommon to encounter metalworking reamers and countersinks from the early 19th century. Brass is easy to drill even with an egg beater-style hand drill. The holes can then be

sized using tapered reamers held in a brace. A great deal of this sort of work can be done by hand. I used an electric drill for the thick brass; the thin sheet I did by hand.

## Working With Plastic

The drawer sides are grooved to accept runners fastened into the case. I used ultra-high molecular weight polyethylene (UHMW). The advantage of this material over wooden runners is that it is dimensionally stable, allowing for

a close fit of the drawers without fear of seizing. And it's slippery. This material is commonly used as a low-friction bearing surface on a variety of woodworking machines.

You can cut it with a fine-toothed saw (I used a hacksaw) and, previously unbeknownst to me, you can plane it with a sharp plane. You can purchase this material from a variety

of suppliers including Lee Valley Tools and industrial-supply houses including McMaster-Carr and Grainger.

## Conclusion

When I build things for myself, I always seek to learn something new. For me, the finished projects are secondary to the journey. This project presented me an opportunity to commune with the rest of the woodworking universe. I wanted to integrate modern materials, specifically plywood (see the Online Extras for my experience of working



**Metalwork.** "Free machining" or alloy 360 brass is readily available and very easy to work by hand. With a drill, hacksaw and file, you can make just about any shape you need.

with that modern material), and stretch my own skill base in the same way I ask you to stretch yours.

Like those of you who only occasionally do period work, I've attempted to build something outside my comfort zone without the appropriate tools and approaches. I think I now better understand what you are up against. I still believe all woodworkers should possess basic hand skills. But I'm less willing to suggest, as I think I have in the past, that 18th-century methods are suitable for practically any woodworking situation. Modern woodworking and period woodworking just aren't always similar. **PWM**

Visit Adam's blog at [artsandmysteries.com](http://artsandmysteries.com) for more discussion of traditional tools and techniques.



**Slippery slides.** Ultra-high molecular weight plastic is much slicker than wood, so drawers and flaps slide freely. You can cut it with hand tools – and even plane it.

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**BLOG:** Read "Working with Plywood" on the Arts & Mysteries blog.

**IN OUR STORE:** "The Arts & Mysteries of Hand Tools" on CD.

## About This Column

**ARTS & Mysteries**

Adam covers 18th-century shop practices and tools in his own, inimitable style. The phrase "Arts & Mysteries" refers to the contract between an apprentice and master – the 18th-century master was contractually obligated to teach apprentices trade secrets of a given craft (and the apprentice was expected to preserve those "mysteries").

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)

# Wipe-on Finishes

How can something so simple be made so hard to understand?

It's probably fair to say that a majority, or at least a large minority, of woodworkers use a finish they can wipe on and off the wood. No expensive spray gun; not even any brush cleanup. Simple.

At least the application is simple. But these finishes have been made the most complex and confusing of all finishes by manufacturers striving for an edge (they want to convince you they have something special) and writers who either buy into the marketing or simply don't know what they are talking about.

## Wipe-on Finish Basics

There are four primary types of wipe-on finishes:

- Oil (boiled linseed and tung)
- Wiping varnish (alkyd or polyurethane varnish thinned about half with mineral spirits)
- Blends of oil and varnish (thinned or not)
- Gel varnish (alkyd or polyurethane varnish in a "gel" consistency).

Each of these finishes can be wiped or brushed, or even sprayed, on the wood and then wiped off.

Oils and blends of oil and varnish don't harden well, so all of the excess has to be wiped off or the surface will remain sticky.

Wiping varnish can be wiped off, or it can be left damp or wet on the wood to build faster because it dries hard.

Gel varnish also dries hard but you can't leave a thick layer without getting streaks or brush marks, so it's better to wipe off the excess.

All of these finishes can be combined (and also thinned with mineral spirits) in any proportion, with these caveats: Adding oil to varnish means the finish can't dry hard, so all the excess has to be wiped off, and adding any of the liq-

uid finishes (or thinner) to gel varnish reduces the gel quality of the product.

I think this is pretty simple. But all kinds of problems are introduced by inaccurate labeling, marketing and descriptions. I'm going to discuss three: Labeling a thinned varnish "tung oil," claiming that the product polymerizes and calling varnish "resin."

## Tung Oil

Tung oil is harvested from the nut of the tung tree, which is native to China but is now grown in other parts of the world. It's more water-resistant than linseed oil and replaced linseed oil around the turn of the 20th century as the oil ingredient in exterior varnishes.

These varnishes, and all varnishes at the time, were made by cooking one of these oils with a natural resin, such as amber, copal or kauri, which are all fossilized sap from pine trees.

By the 1960s tung oil was being marketed as a complete finish in itself. But tung oil has problems. It dries consid-

erably slower than boiled linseed oil, it doesn't look or feel nice until five or more coats are applied and sanded between each, and it never gets hard, so no build can be achieved. Tung oil is not used very often as a finish.

To overcome the problems while keeping the positive-sounding exotic name, manufacturers began selling thinned varnish and oil/varnish blends and calling the product "tung oil." This dishonest labeling has created all sorts of confusion in the marketplace and among writers who aren't paying attention.

## Polymerization Explained

Some manufacturers claim their oils or varnishes "polymerize." This is a big-sounding word that makes the finish seem special. But polymerization is simply the way all oils and varnishes cure when exposed to oxygen in the air. Individual molecules in the finish crosslink or hook up with each other chemically.



**Finish test.** Oils and oil/varnish blends dry soft and wrinkled. Wiping varnish dries hard and smooth. So the easy test is to put a puddle on a non-porous surface such as the top of the can and see how the puddle dries. Both of these products claim to be oil, but Daly's ProFin is clearly varnish.


CONTINUED ON PAGE 62



# Turn *any* handplane into the perfect tool.

## Super-Tune a Handplane

How to Turn a Flea-market Find into a Fast, Accurate and Smooth-cutting Tool

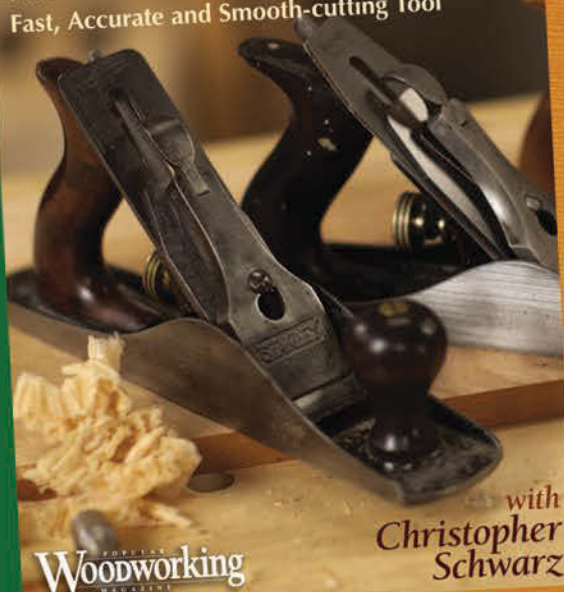

With just a little effort and a couple hours, you can turn any handplane into a super-tuned, high-performance tool.

This DVD from Christopher Schwarz shows you how to rehab a flea-market find (or soup up a new tool) into a perfectly tuned plane that can handle any task. You'll discover:

- What to look for in an old handplane
- How to break it down and clean it up
- How to assess and address various problems
- How to reassemble a plane beyond factory standards
- And how to super-tune it for top performance

Follow Christopher's step-by-step approach, and you'll end up with a vintage (or new) tool that performs perfectly.

SHOP  
Woodworking


This and many more Popular Woodworking DVDs are available at [ShopWoodworking.com](http://ShopWoodworking.com) or call (855) 840-5118 to order




**Two tung oils.** Both of these products claim to be tung oil. Old Masters' (left) clearly is. McCloskey's (right) clearly isn't. It's varnish.



**Watco watermarks.** Watco Danish Oil claims better protection because the finish polymerizes "in" the wood. Here, I left puddles of water on three coats of dried Watco for just more than a minute. It's clear that resistance to water penetration is very minimal.

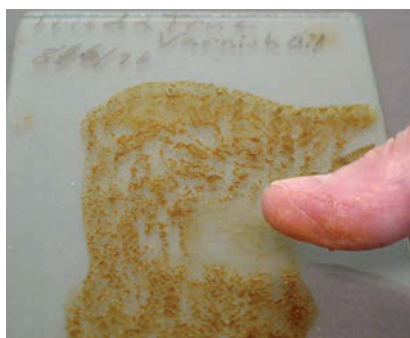

**Very poor drying.** Tried & True oil finishes are little more than raw linseed oil. Because I save almost all my tests, I still have a glass plate with Tried & True Varnish Oil, which has been exposed to air for 16 years. The finish is still soft and sticky.

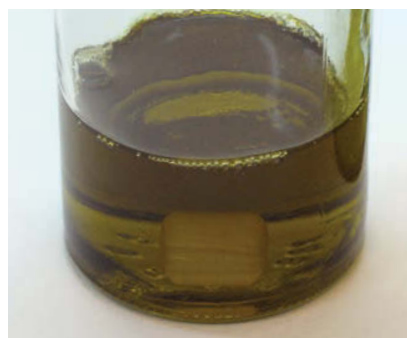

**Resin in oil.** Varnish is not made by simply adding resin to oil. The two have to be cooked to change the chemistry. Here you see a piece of amber resin dropped into some raw linseed oil. The resin just sinks to the bottom, as you would expect.

So the claim that a finish polymerizes is meaningless for distinguishing one oil or varnish from another.

The ingredient in oils and varnishes that makes them dry within a reasonable time is a catalyst called a "drier." The drier speeds the introduction of oxygen, and thus the polymerization and curing. It's the absence of a drier in tung oil that explains the slower drying.

The difference between raw linseed oil, which takes weeks or months to dry, and "boiled" linseed oil, which dries overnight when all the excess is wiped off, is the drier added to boiled linseed oil. Both oils polymerize.

One way you know there are driers in salad bowl finishes, which are wiping varnishes, is that they dry within hours.

Despite all oils and varnishes drying by polymerization, some manufacturers still try for an edge. Here are three examples.

Watco has long claimed that its Dan-

ish Oil polymerizes "in" the wood, implying better protection – that is, water resistance. Back in the 1970s I bought into this until I learned from sad experience that the important quality was how thick the finish is on the surface. Oil/varnish blends like Watco can't be built up, so they aren't very protective.

Tried & True oil finishes don't contain driers, so they dry extremely slowly. They are essentially raw linseed oil. Why would anyone use such a slow-drying finish? Because the word "polymerize" in the marketing has made them think the finish is somehow better.

Southerland Welles also claims "polymerizing" to market its tung-oil product. But rather than simply exposing the raw oil to air for a while as Tried & True does, Southerland Welles cooks the tung oil in inert gases – no oxygen. So the chemistry of the oil changes. It thickens so much that it has to be thinned to be useful, and it

dries very rapidly when exposed to air, even though it doesn't contain driers.

Tru-Oil, marketed for gunstocks, is also this type of finish.

## Resin, Drying & Hardening

So how do confused writers explain the differences in drying and hardening? They use the vague term "resin." There's oil, and the more resin added, the faster and harder the drying.

But you can't just add resin to oil and change it. Think of dropping amber jewelry into oil. It will sink.

Varnish is made by cooking oil with a resin, including synthetic alkyd and polyurethane resins. This changes the chemistry, causing the finish to dry hard. It's not the amount of resin used, it's the cooking of the two substances that makes varnish.

So why not use the word "varnish" instead of "resin?" Everyone understands varnish. Why make something so simple so hard? **PWM**

Bob Flexner is author of "Flexner on Finishing" and "Wood Finishing 101."

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**ARTICLES:** You'll find many free finishing articles on our web site.

**IN OUR STORE:** "Flexner on Finishing" – 12 years of updated columns illustrated with beautiful full-color images, and "Wood Finishing 101."

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)



# HARBOR FREIGHT TOOLS

Quality Tools at Ridiculously Low Prices

**LIFETIME WARRANTY**  
ON ALL HAND TOOLS!

## FACTORY DIRECT TO YOU!

How does Harbor Freight Tools sell high quality tools at such ridiculously low prices? We buy direct from the factories who also supply the major brands and sell direct to you. It's just that simple! See for yourself at one of our 400 Stores Nationwide and use this 20% Off Coupon on one of our 7,000 products\*, plus pick up a Free 1" x 25 Ft. Tape Measure, a \$5.99 value. We stock Shop Equipment, Hand Tools, Tarps, Compressors, Air & Power Tools, Woodworking Tools, Welders, Tool Boxes, Generators, and much more.

- Over 20 Million Satisfied Customers!
- 1 Year Competitor's Low Price Guarantee
- No Hassle Return Policy!
- 100% Satisfaction Guaranteed!
- Over 400 Stores Nationwide

**Nobody Beats Our Quality, Service and Price!**

**SUPER COUPON!**

**FREE!**

WITH MINIMUM PURCHASE OF \$9.99

**PITTSBURGH**

**1" x 25 FT. TAPE MEASURE**

ITEM 47737/69080/69030/69031

REG. PRICE \$5.99



**LIMIT 1** - Only available with qualifying minimum purchase (excludes gift value). Coupon good at our stores or website or by phone. Cannot be used with other discount, coupon or prior purchase. Offer good while supplies last. Shipping & Handling charges may apply if not picked up in-store. Original coupon must be presented. Non-transferable. Valid through 5/8/13. Limit one coupon per customer per day.

94062198

**SUPER COUPON!**

**PITTSBURGH**

**12" RATCHET BAR CLAMP/SPREADER**

LOT NO. 46807/68975/69221/69222

Item 46807 shown

**SAVE 63%**

**\$199** REG. PRICE \$5.49



**LIMIT 7** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

43800714

**SUPER COUPON!**

**20% OFF**

ANY SINGLE ITEM!

**LIMIT 1** - Save 20% on any one item purchased at our stores or website or by phone. Cannot be used with other discount, coupon, gift cards, Inside Track Club membership, extended service plans or on any of the following: compressors, generators, tool storage or carts, welders, floor jacks, Towable Ride-on Trencher (Item 65162), open box items, in-store event or parking lot sale items. Not valid on prior purchases after 30 days from original purchase date with original receipt. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

86360258

**SUPER COUPON!**

**12" COMBINATION SQUARE SET**

LOT NO. 92471

**PITTSBURGH**

**SAVE 50%**

**\$499** REG. PRICE \$9.99



**LIMIT 5** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

71934318

**SUPER COUPON!**

**OSCILLATING SPINDLE SANDER**

LOT NO. 95088/69257

**SAVE \$60**

**\$8999** REG. PRICE \$149.99



**LIMIT 4** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

98100937

**SUPER COUPON!**

**CENTRAL PNEUMATIC**

**3 GALLON, 100 PSI OILLESS PANCAKE AIR COMPRESSOR**

LOT NO. 95275/69486/60637

Item 95275 shown

**SAVE 50%**

**\$3999** REG. PRICE \$79.99



**LIMIT 5** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

60951051

**SUPER COUPON!**

**GENERAL MACHINERY**

**2 HP INDUSTRIAL 5 MICRON DUST COLLECTOR**

LOT NO. 97869

**SAVE \$100**

**\$14999** REG. PRICE \$249.99



**LIMIT 3** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

40437117

**SUPER COUPON!**

**PITTSBURGH**

**RAPID PUMP® 3 TON HEAVY DUTY STEEL FLOOR JACK**

Item 68048 shown

**SAVE \$70**

**\$6999** REG. PRICE \$139.99



**LIMIT 3** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

39520085

**SUPER COUPON!**

**HaulMaster**

**500 LB. CAPACITY ALUMINUM CARGO CARRIER**

LOT NO. 92655/69688/60771

Item 92655 shown

**SAVE \$60**

**\$6999** REG. PRICE \$129.99



**LIMIT 5** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

18425122

**SUPER COUPON!**

**NEW!**

**12" DOUBLE-BEVEL SLIDING COMPOUND MITER SAW WITH LASER GUIDE**

CHICAGO ELECTRIC POWER TOOLS

LOT NO. 98194/69684

Item 69684 shown

**SAVE \$80**

**\$11999** REG. PRICE \$199.99



**LIMIT 5** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

15221721

**SUPER COUPON!**

**NEW!**

**18 VOLT CORDLESS 1/2" DRILL/DRIVER WITH KEYLESS CHUCK**

CHICAGO ELECTRIC POWER TOOLS

LOT NO. 68850

**SAVE 33%**

**\$3999** REG. PRICE \$59.99



**LIMIT 3** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

22791846

**SUPER COUPON!**

**WINDSOR DESIGN**

**60" WORKBENCH WITH FOUR DRAWERS**

LOT NO. 93454/69054

Item 93454 shown

**SAVE \$90**

**\$13999** REG. PRICE \$229.99



**LIMIT 4** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

89948387

**SUPER COUPON!**

**CHICAGO ELECTRIC POWER TOOLS**

**FLUORESCENT WORK LIGHT**

LOT NO. 92079

**SAVE 33%**

**\$999** REG. PRICE \$14.99



**LIMIT 5** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

95767542

**SUPER COUPON!**

**WESTERN SAFETY**

**NITRILE GLOVES PACK OF 100 MEDIUM**

LOT NO. 68496

Item 68498 shown

**SAVE 40%**

**\$599** REG. PRICE \$9.99



**LIMIT 7** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

16586758

**SUPER COUPON!**

**CENTRAL MACHINERY**

**16" VARIABLE SPEED SCROLL SAW**

LOT NO. 93012

**SAVE 25%**

**\$5999** REG. PRICE \$79.99



**LIMIT 5** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

58107234

**SUPER COUPON!**

**drillmaster**

**80 PIECE ROTARY TOOL KIT**

LOT NO. 69451/68986/97626

Item 69451 shown

**SAVE 72%**

**\$699** REG. PRICE \$24.99



**LIMIT 8** - Good at our stores or website or by phone. Cannot be used with other discount or coupon or prior purchase after 30 days from original purchase with original receipt. Offer good while supplies last. Non-transferable. Original coupon must be presented. Valid through 5/8/13. Limit one coupon per customer per day.

70986680

Order at [HarborFreight.com](http://HarborFreight.com) or 800-423-2567  
We FedEx Most Orders in 24 Hours for \$6<sup>99</sup>

**GRAND OPENINGS** Huntington Park, CA N. Hollywood, CA Brookfield, CT St. Louis, MO  
La Mirada, CA San Jose, CA Madison Heights, MI Richmond, VA

# ‘Frankenbench’

A dream deferred –  
and that’s just fine.

I’ve dreamed about my Workbench for years. It will be solid maple, top to bottom. It will have traditional face and tail vises, with a sliding dead-man between. The top? Two 3½"-thick laminated slabs separated by a set of four individual tool trays – like Robert Lang put on his 21st-century Bench (October 2008, issue #171).

I have considered every detail. Length and height? Check. Finish? Check. Round or square dog holes? Decided. Leg construction? Solid wood, flush with the front edge of the top to facilitate clamping.

Late in January of last year, my wife found me sitting in my unheated shop, staring into the void that my Workbench will one day occupy. “Having fun?” she asked, grinning from ear to ear. She knew I was thinking about my Workbench.

Now, my beautiful wife is not a woodworker, but she does love me. And she knows my poor table saw has been moonlighting as a work surface for a long time. So when she heard me remark that I really should build a workbench, she got an idea. With great secrecy, she visited her favorite online retailer (the same one where she orders most of her books and kids’ toys) and typed “workbench” into the search bar.

Behold! The site presented a set of pre-fabricated bench legs, made of structural foam plastic resins. The advertising copy promised a bench in an hour: Just add plywood and 2x4s! So with great excitement she blew the birthday budget and clicked “Buy.”

And that’s how on my 38th birthday I came to be sitting alone, shivering in my workshop. And that’s how she knew I was thinking about my Workbench.



She was brimming over with pride—she just knew she had gotten me something great! How could I tell her the truth? My solid maple Workbench could never have plastic legs!

She soon retreated into the house, but her radiant joy lingered. Like fine dust, it began to settle. It landed on my grandfather’s old jack plane. That plane is ugly, but it works, and it connects me to him. It lighted on the quilt rack I’m making for Mom to hold hand-stitched quilts my great-grandmother made. It settled upon a scrap from the rocking horse I made for my three children.

I began to realize that the reason I love woodworking is because it connects me to my world and the people around me in mystical ways. Ways given voice by a plane skirting along a board. Ways magically displayed by my daughter as she drapes long shavings across her hair like Nellie Oleson’s curls. Ways inexpressible.

This year, I received my true birthday gift sitting alone in my grey, unlit shop, pondering how to tell my wife that I can’t use the gift she had so proudly given. I realized that I could use those legs.

Except, as it turns out, my solid maple Workbench is made of Southern yellow pine, because I can’t afford maple right now. It is too tall, because I couldn’t really shorten those plastic legs. And it has some scabbed-on surfaces to facilitate clamping, because the structural foam plastic resin legs couldn’t be made truly flush.

Maybe it’s an ugly Frankenbench, but it works great. And every time I use it, I remember my true 38th birthday gift: a new appreciation that I work the wood for the connections it creates. **PWM**

*Paul lives in Wildwood, Miss., and looks forward to the day he can retire (almost three decades from now) and spend more time in his shop making toys, furniture and whatever else strikes his fancy.*

## ONLINE EXTRAS

For links to all online extras, go to:

■ [popularwoodworking.com/feb13](http://popularwoodworking.com/feb13)

**IN OUR STORE:** You’ll find books, DVDs and downloadable plans for many workbenches in our store.

Our products are available online at:

■ [ShopWoodworking.com](http://ShopWoodworking.com)



# WOODCRAFT®

QUALITY WOODWORKING TOOLS •  
SUPPLIES • ADVICE®



## Introducing The Innovative New Easy Chuck™ From Easy Wood Tools™

Step up to the Easy Chuck, and see what innovation is all about – welcome a game changing evolution in woodturning technology! Featuring patent pending Easy Chuck Snap Lock Technology (SLT™), Easy Jaws™ system and an integrated Zoom Ring™, we guarantee you the Easy Chuck will change the way you view woodturning chucks.

The combination of Snap-Lock Technology and Easy Jaws system allows for simple and quick jaw changes. Securing a workpiece with the Easy Chuck has never been easier, thanks to the innovative Zoom Ring™ technology.

- Snap-Lock Technology (SLT™)
- 30-Second Jaw Changes
- Exclusive Zoom Ring™ For Quick, No Tools, In & Out Jaw Adjustment
- 100% Made In America

154689 Easy Chuck W/1 $\frac{3}{8}$ " Easy Dovetail Jaws  
154768  $\frac{1}{2}$ " Easy Reach Dovetail  
154770 3 $\frac{1}{2}$ " Easy Reach Dovetail Jaws  
154772 Easy Spindle Adapts 1 $\frac{1}{4}$ " x 8 TPI To 1" x 8 TPI



**"A QUANTUM leap in woodturning  
makes everything else obsolete."  
– Scott Phillips, *The American  
Woodshop* on PBS**

For A Free Catalog Or To Find Your Local Woodcraft Store, Visit [woodcraft.com](http://woodcraft.com) Or Call 800-225-1153. 13PW02P  
For Information On Woodcraft Retail Franchise Opportunities, Call 1-855-923-7326 Or Visit [woodcraftfranchise.com](http://woodcraftfranchise.com)



## IMAGINATION IN A CLASS OF ITS OWN

Introducing the all-new 15" bandsaw from Powermatic. The PM1500 packs all the features of a larger bandsaw into a size that is perfect for your workshop.



### SIDE PLATE

Oversized side plate can be used in the horizontal or vertical position.



### TENSION RELEASE

Blade tension release with electrical interlock prevents the bandsaw from starting when the blade is de-tensioned or released.



### WHEELS

Solid cast iron upper and lower wheels create the momentum needed for heavy resaw.



VISIT: [POWERMATIC.COM](http://POWERMATIC.COM)  
TO LEARN MORE

